



REGULAMENTO BRASILEIRO DA AVIAÇÃO CIVIL

RBAC nº 23
EMENDA nº 63

Título: **REQUISITOS DE AERONAVEGABILIDADE:
AVIÕES CATEGORIA NORMAL, UTILIDADE,
ACROBÁTICA E TRANSPORTE REGIONAL.**

Aprovação: Resolução nº xx, de xx de xxxxx de 201x. **Origem:** SAR

SUMÁRIO

23.00 Requisitos da adoção

APÊNDICE A-I DO RBAC 23 – REPUBLICAÇÃO DO 14 CFR PART 23, EMENDA 23-63,
ADOTADO PELO RBAC 23

23.00 Requisitos da adoção

(a) Geral

Para concessão de certificados de tipo para aviões categoria normal, utilidade, acrobática e transporte regional, será adotado integralmente, na língua inglesa, o regulamento **Title 14 Code of Federal Regulations Part 23**, Emenda 23-63, efetiva em 21 de março de 2017, da autoridade de aviação civil, **Federal Aviation Administration – FAA**, do **Department of Transportation** dos Estados Unidos da América, o qual é republicado no Apêndice A-I deste RBAC a partir do contido no sítio de publicação do regulamento adotado em pauta: <https://www.ecfr.gov>.

(b) Divergência editorial

Qualquer divergência editorial contida no Apêndice A-I decorrente da republicação ali contida e o texto oficial da **FAA** deverá prevalecer, mediante anuência da ANAC, o texto oficial da **FAA**.

(c) Republicação

Sempre que houver emenda no regulamento **14 Code of Federal Regulations Part 23**, a ANAC republicará o texto do regulamento adotado na forma do Apêndice A-I, por meio de emendas a este RBAC.

(d) Emenda deste RBAC

Especificamente para este RBAC a indicação de sua emenda também é através da adoção da emenda do regulamento adotado e republicado no Apêndice A-I deste RBAC, portanto seguindo a indicação da emenda do regulamento adotado e indicado no parágrafo (a) desta seção.

APÊNDICE A-I DO RBAC 23
REPUBLICAÇÃO DO 14 CFR PART 23, EMENDA 23-63, ADOTADO PELO RBAC 23

Title 14: Aeronautics and Space

**PART 23—AIRWORTHINESS STANDARDS: NORMAL, UTILITY, ACROBATIC, AND
COMMUTER CATEGORY AIRPLANES**

Special Federal Aviation Regulation No. 23

Subpart A—General

- § 23.1 Applicability.
- § 23.2 Special retroactive requirements.
- § 23.3 Airplane categories.

Subpart B—Flight

General

- § 23.21 Proof of compliance.
- § 23.23 Load distribution limits.
- § 23.25 Weight limits.
- § 23.29 Empty weight and corresponding center of gravity.
- § 23.31 Removable ballast.
- § 23.33 Propeller speed and pitch limits.

Performance

- § 23.45 General.
- § 23.49 Stalling speed.
- § 23.51 Takeoff speeds.
- § 23.53 Takeoff performance.
- § 23.55 Accelerate-stop distance.
- § 23.57 Takeoff path.
- § 23.59 Takeoff distance and takeoff run.
- § 23.61 Takeoff flight path.
- § 23.63 Climb: General.
- § 23.65 Climb: All engines operating.
- § 23.66 Takeoff climb: One-engine inoperative.
- § 23.67 Climb: One engine inoperative.
- § 23.69 Enroute climb/descent.
- § 23.71 Glide: Single-engine airplanes.
- § 23.73 Reference landing approach speed.
- § 23.75 Landing distance.
- § 23.77 Balked landing.

Flight Characteristics

- § 23.141 General.

Controllability and Maneuverability

- § 23.143 General.
- § 23.145 Longitudinal control.

- § 23.147 Directional and lateral control.
- § 23.149 Minimum control speed.
- § 23.151 Acrobatic maneuvers.
- § 23.153 Control during landings.
- § 23.155 Elevator control force in maneuvers.
- § 23.157 Rate of roll.

Trim

- § 23.161 Trim.

Stability

- § 23.171 General.
- § 23.173 Static longitudinal stability.
- § 23.175 Demonstration of static longitudinal stability.
- § 23.177 Static directional and lateral stability.
- § 23.181 Dynamic stability.

Stalls

- § 23.201 Wings level stall.
- § 23.203 Turning flight and accelerated turning stalls.
- § 23.207 Stall warning.

Spinning

- § 23.221 Spinning.

Ground and Water Handling Characteristics

- § 23.231 Longitudinal stability and control.
- § 23.233 Directional stability and control.
- § 23.235 Operation on unpaved surfaces.
- § 23.237 Operation on water.
- § 23.239 Spray characteristics.

Miscellaneous Flight Requirements

- § 23.251 Vibration and buffeting.
- § 23.253 High speed characteristics.
- § 23.255 Out of trim characteristics.

Subpart C—Structure

General

- § 23.301 Loads.
- § 23.302 Canard or tandem wing configurations.
- § 23.303 Factor of safety.
- § 23.305 Strength and deformation.
- § 23.307 Proof of structure.

Flight Loads

- § 23.321 General.
- § 23.331 Symmetrical flight conditions.

- § 23.333 Flight envelope.
- § 23.335 Design airspeeds.
- § 23.337 Limit maneuvering load factors.
- § 23.341 Gust loads factors.
- § 23.343 Design fuel loads.
- § 23.345 High lift devices.
- § 23.347 Unsymmetrical flight conditions.
- § 23.349 Rolling conditions.
- § 23.351 Yawing conditions.
- § 23.361 Engine torque.
- § 23.363 Side load on engine mount.
- § 23.365 Pressurized cabin loads.
- § 23.367 Unsymmetrical loads due to engine failure.
- § 23.369 Rear lift truss.
- § 23.371 Gyroscopic and aerodynamic loads.
- § 23.373 Speed control devices.

Control Surface and System Loads

- § 23.391 Control surface loads.
- § 23.393 Loads parallel to hinge line.
- § 23.395 Control system loads.
- § 23.397 Limit control forces and torques.
- § 23.399 Dual control system.
- § 23.405 Secondary control system.
- § 23.407 Trim tab effects.
- § 23.409 Tabs.
- § 23.415 Ground gust conditions.

Horizontal Stabilizing and Balancing Surfaces

- § 23.421 Balancing loads.
- § 23.423 Maneuvering loads.
- § 23.425 Gust loads.
- § 23.427 Unsymmetrical loads.

Vertical Surfaces

- § 23.441 Maneuvering loads.
- § 23.443 Gust loads.
- § 23.445 Outboard fins or winglets.

Ailerons and Special Devices

- § 23.455 Ailerons.
- § 23.459 Special devices.

Ground Loads

- § 23.471 General.
- § 23.473 Ground load conditions and assumptions.
- § 23.477 Landing gear arrangement.
- § 23.479 Level landing conditions.
- § 23.481 Tail down landing conditions.
- § 23.483 One-wheel landing conditions.

- § 23.485 Side load conditions.
- § 23.493 Braked roll conditions.
- § 23.497 Supplementary conditions for tail wheels.
- § 23.499 Supplementary conditions for nose wheels.
- § 23.505 Supplementary conditions for skiplanes.
- § 23.507 Jacking loads.
- § 23.509 Towing loads.
- § 23.511 Ground load; unsymmetrical loads on multiple-wheel units.

Water Loads

- § 23.521 Water load conditions.
- § 23.523 Design weights and center of gravity positions.
- § 23.525 Application of loads.
- § 23.527 Hull and main float load factors.
- § 23.529 Hull and main float landing conditions.
- § 23.531 Hull and main float takeoff condition.
- § 23.533 Hull and main float bottom pressures.
- § 23.535 Auxiliary float loads.
- § 23.537 Seawing loads.

Emergency Landing Conditions

- § 23.561 General.
- § 23.562 Emergency landing dynamic conditions.

Fatigue Evaluation

- § 23.571 Metallic pressurized cabin structures.
- § 23.572 Metallic wing, empennage, and associated structures.
- § 23.573 Damage tolerance and fatigue evaluation of structure.
- § 23.574 Metallic damage tolerance and fatigue evaluation of commuter category airplanes.
- § 23.575 Inspections and other procedures.

Subpart D—Design and Construction

- § 23.601 General.
- § 23.603 Materials and workmanship.
- § 23.605 Fabrication methods.
- § 23.607 Fasteners.
- § 23.609 Protection of structure.
- § 23.611 Accessibility provisions.
- § 23.613 Material strength properties and design values.
- § 23.619 Special factors.
- § 23.621 Casting factors.
- § 23.623 Bearing factors.
- § 23.625 Fitting factors.
- § 23.627 Fatigue strength.
- § 23.629 Flutter.

Wings

- § 23.641 Proof of strength.

Control Surfaces

- § 23.651 Proof of strength.
- § 23.655 Installation.
- § 23.657 Hinges.
- § 23.659 Mass balance.

Control Systems

- § 23.671 General.
- § 23.672 Stability augmentation and automatic and power-operated systems.
- § 23.673 Primary flight controls.
- § 23.675 Stops.
- § 23.677 Trim systems.
- § 23.679 Control system locks.
- § 23.681 Limit load static tests.
- § 23.683 Operation tests.
- § 23.685 Control system details.
- § 23.687 Spring devices.
- § 23.689 Cable systems.
- § 23.691 Artificial stall barrier system.
- § 23.693 Joints.
- § 23.697 Wing flap controls.
- § 23.699 Wing flap position indicator.
- § 23.701 Flap interconnection.
- § 23.703 Takeoff warning system.

Landing Gear

- § 23.721 General.
- § 23.723 Shock absorption tests.
- § 23.725 Limit drop tests.
- § 23.726 Ground load dynamic tests.
- § 23.727 Reserve energy absorption drop test.
- § 23.729 Landing gear extension and retraction system.
- § 23.731 Wheels.
- § 23.733 Tires.
- § 23.735 Brakes.
- § 23.737 Skis.
- § 23.745 Nose/tail wheel steering.

Floats and Hulls

- § 23.751 Main float buoyancy.
- § 23.753 Main float design.
- § 23.755 Hulls.
- § 23.757 Auxiliary floats.

Personnel and Cargo Accommodations

- § 23.771 Pilot compartment.
- § 23.773 Pilot compartment view.
- § 23.775 Windshields and windows.
- § 23.777 Cockpit controls.
- § 23.779 Motion and effect of cockpit controls.
- § 23.781 Cockpit control knob shape.

- § 23.783 Doors.
- § 23.785 Seats, berths, litters, safety belts, and shoulder harnesses.
- § 23.787 Baggage and cargo compartments.
- § 23.791 Passenger information signs.
- § 23.803 Emergency evacuation.
- § 23.805 Flightcrew emergency exits.
- § 23.807 Emergency exits.
- § 23.811 Emergency exit marking.
- § 23.812 Emergency lighting.
- § 23.813 Emergency exit access.
- § 23.815 Width of aisle.
- § 23.831 Ventilation.

Pressurization

- § 23.841 Pressurized cabins.
- § 23.843 Pressurization tests.

Fire Protection

- § 23.851 Fire extinguishers.
- § 23.853 Passenger and crew compartment interiors.
- § 23.855 Cargo and baggage compartment fire protection.
- § 23.856 Thermal/acoustic insulation materials.
- § 23.859 Combustion heater fire protection.
- § 23.863 Flammable fluid fire protection.
- § 23.865 Fire protection of flight controls, engine mounts, and other flight structure.

Electrical Bonding and Lightning Protection

- § 23.867 Electrical bonding and protection against lightning and static electricity.

Miscellaneous

- § 23.871 Leveling means.

Subpart E—Powerplant

General

- § 23.901 Installation.
- § 23.903 Engines.
- § 23.904 Automatic power reserve system.
- § 23.905 Propellers.
- § 23.907 Propeller vibration and fatigue.
- § 23.909 Turbocharger systems.
- § 23.925 Propeller clearance.
- § 23.929 Engine installation ice protection.
- § 23.933 Reversing systems.
- § 23.934 Turbojet and turbofan engine thrust reverser systems tests.
- § 23.937 Turbopropeller-drag limiting systems.
- § 23.939 Powerplant operating characteristics.
- § 23.943 Negative acceleration.

Fuel System

- § 23.951 General.
- § 23.953 Fuel system independence.

- § 23.954 Fuel system lightning protection.
- § 23.955 Fuel flow.
- § 23.957 Flow between interconnected tanks.
- § 23.959 Unusable fuel supply.
- § 23.961 Fuel system hot weather operation.
- § 23.963 Fuel tanks: General.
- § 23.965 Fuel tank tests.
- § 23.967 Fuel tank installation.
- § 23.969 Fuel tank expansion space.
- § 23.971 Fuel tank sump.
- § 23.973 Fuel tank filler connection.
- § 23.975 Fuel tank vents and carburetor vapor vents.
- § 23.977 Fuel tank outlet.
- § 23.979 Pressure fueling systems.

Fuel System Components

- § 23.991 Fuel pumps.
- § 23.993 Fuel system lines and fittings.
- § 23.994 Fuel system components.
- § 23.995 Fuel valves and controls.
- § 23.997 Fuel strainer or filter.
- § 23.999 Fuel system drains.
- § 23.1001 Fuel jettisoning system.

Oil System

- § 23.1011 General.
- § 23.1013 Oil tanks.
- § 23.1015 Oil tank tests.
- § 23.1017 Oil lines and fittings.
- § 23.1019 Oil strainer or filter.
- § 23.1021 Oil system drains.
- § 23.1023 Oil radiators.
- § 23.1027 Propeller feathering system.

Cooling

- § 23.1041 General.
- § 23.1043 Cooling tests.
- § 23.1045 Cooling test procedures for turbine engine powered airplanes.
- § 23.1047 Cooling test procedures for reciprocating engine powered airplanes.

Liquid Cooling

- § 23.1061 Installation.
- § 23.1063 Coolant tank tests.

Induction System

- § 23.1091 Air induction system.
- § 23.1093 Induction system icing protection.
- § 23.1095 Carburetor deicing fluid flow rate.
- § 23.1097 Carburetor deicing fluid system capacity.
- § 23.1099 Carburetor deicing fluid system detail design.

- § 23.1101 Induction air preheater design.
- § 23.1103 Induction system ducts.
- § 23.1105 Induction system screens.
- § 23.1107 Induction system filters.
- § 23.1109 Turbocharger bleed air system.
- § 23.1111 Turbine engine bleed air system.

Exhaust System

- § 23.1121 General.
- § 23.1123 Exhaust system.
- § 23.1125 Exhaust heat exchangers.

Powerplant Controls and Accessories

- § 23.1141 Powerplant controls: General.
- § 23.1142 Auxiliary power unit controls.
- § 23.1143 Engine controls.
- § 23.1145 Ignition switches.
- § 23.1147 Mixture controls.
- § 23.1149 Propeller speed and pitch controls.
- § 23.1153 Propeller feathering controls.
- § 23.1155 Turbine engine reverse thrust and propeller pitch settings below the flight regime.
- § 23.1157 Carburetor air temperature controls.
- § 23.1163 Powerplant accessories.
- § 23.1165 Engine ignition systems.

Powerplant Fire Protection

- § 23.1181 Designated fire zones; regions included.
- § 23.1182 Nacelle areas behind firewalls.
- § 23.1183 Lines, fittings, and components.
- § 23.1189 Shutoff means.
- § 23.1191 Firewalls.
- § 23.1192 Engine accessory compartment diaphragm.
- § 23.1193 Cowling and nacelle.
- § 23.1195 Fire extinguishing systems.
- § 23.1197 Fire extinguishing agents.
- § 23.1199 Extinguishing agent containers.
- § 23.1201 Fire extinguishing systems materials.
- § 23.1203 Fire detector system.

Subpart F—Equipment

General

- § 23.1301 Function and installation.
- § 23.1303 Flight and navigation instruments.
- § 23.1305 Powerplant instruments.
- § 23.1306 Electrical and electronic system lightning protection.
- § 23.1307 Miscellaneous equipment.
- § 23.1308 High-intensity Radiated Fields (HIRF) Protection.
- § 23.1309 Equipment, systems, and installations.
- § 23.1310 Power source capacity and distribution.

Instruments: Installation

- § 23.1311 Electronic display instrument systems.
- § 23.1321 Arrangement and visibility.
- § 23.1322 Warning, caution, and advisory lights.
- § 23.1323 Airspeed indicating system.
- § 23.1325 Static pressure system.
- § 23.1326 Pitot heat indication systems.
- § 23.1327 Magnetic direction indicator.
- § 23.1329 Automatic pilot system.
- § 23.1331 Instruments using a power source.
- § 23.1335 Flight director systems.
- § 23.1337 Powerplant instruments installation.

Electrical Systems and Equipment

- § 23.1351 General.
- § 23.1353 Storage battery design and installation.
- § 23.1357 Circuit protective devices.
- § 23.1359 Electrical system fire protection.
- § 23.1361 Master switch arrangement.
- § 23.1365 Electric cables and equipment.
- § 23.1367 Switches.

Lights

- § 23.1381 Instrument lights.
- § 23.1383 Taxi and landing lights.
- § 23.1385 Position light system installation.
- § 23.1387 Position light system dihedral angles.
- § 23.1389 Position light distribution and intensities.
- § 23.1391 Minimum intensities in the horizontal plane of position lights.
- § 23.1393 Minimum intensities in any vertical plane of position lights.
- § 23.1395 Maximum intensities in overlapping beams of position lights.
- § 23.1397 Color specifications.
- § 23.1399 Riding light.
- § 23.1401 Anticollision light system.

Safety Equipment

- § 23.1411 General.
- § 23.1415 Ditching equipment.
- § 23.1416 Pneumatic de-icer boot system.
- § 23.1419 Ice protection.

Miscellaneous Equipment

- § 23.1431 Electronic equipment.
- § 23.1435 Hydraulic systems.
- § 23.1437 Accessories for multiengine airplanes.
- § 23.1438 Pressurization and pneumatic systems.
- § 23.1441 Oxygen equipment and supply.
- § 23.1443 Minimum mass flow of supplemental oxygen.
- § 23.1445 Oxygen distribution system.
- § 23.1447 Equipment standards for oxygen dispensing units.

- § 23.1449 Means for determining use of oxygen.
- § 23.1450 Chemical oxygen generators.
- § 23.1451 Fire protection for oxygen equipment.
- § 23.1453 Protection of oxygen equipment from rupture.
- § 23.1457 Cockpit voice recorders.
- § 23.1459 Flight data recorders.
- § 23.1461 Equipment containing high energy rotors.

Subpart G—Operating Limitations and Information

- § 23.1501 General.
- § 23.1505 Airspeed limitations.
- § 23.1507 Operating maneuvering speed.
- § 23.1511 Flap extended speed.
- § 23.1513 Minimum control speed.
- § 23.1519 Weight and center of gravity.
- § 23.1521 Powerplant limitations.
- § 23.1522 Auxiliary power unit limitations.
- § 23.1523 Minimum flight crew.
- § 23.1524 Maximum passenger seating configuration.
- § 23.1525 Kinds of operation.
- § 23.1527 Maximum operating altitude.
- § 23.1529 Instructions for Continued Airworthiness.

Markings And Placards

- § 23.1541 General.
- § 23.1543 Instrument markings: General.
- § 23.1545 Airspeed indicator.
- § 23.1547 Magnetic direction indicator.
- § 23.1549 Powerplant and auxiliary power unit instruments.
- § 23.1551 Oil quantity indicator.
- § 23.1553 Fuel quantity indicator.
- § 23.1555 Control markings.
- § 23.1557 Miscellaneous markings and placards.
- § 23.1559 Operating limitations placard.
- § 23.1561 Safety equipment.
- § 23.1563 Airspeed placards.
- § 23.1567 Flight maneuver placard.

Airplane Flight Manual and Approved Manual Material

- § 23.1581 General.
- § 23.1583 Operating limitations.
- § 23.1585 Operating procedures.
- § 23.1587 Performance information.
- § 23.1589 Loading information.
- Appendix A to Part 23—Simplified Design Load Criteria
- Appendix B to Part 23 [Reserved]
- Appendix C to Part 23—Basic Landing Conditions
- Appendix D to Part 23—Wheel Spin-Up and Spring-Back Loads
- Appendix E to Part 23 [Reserved]
- Appendix F to Part 23—Test Procedure

Appendix G to Part 23—Instructions for Continued Airworthiness
Appendix H to Part 23—Installation of An Automatic Power Reserve (APR) System
Appendix I to Part 23—Seaplane Loads
Appendix J to Part 23—HIRF Environments and Equipment HIRF Test Levels

Authority: 49 U.S.C. 106(g), 40113, 44701–44702, 44704.

Source: Docket No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, unless otherwise noted.

Special Federal Aviation Regulation No. 23

1. Applicability. An applicant is entitled to a type certificate in the normal category for a reciprocating or turbopropeller multiengine powered small airplane that is to be certificated to carry more than 10 occupants and that is intended for use in operations under Part 135 of the Federal Aviation Regulations if he shows compliance with the applicable requirements of Part 23 of the Federal Aviation Regulations, as supplemented or modified by the additional airworthiness requirements of this regulation.

2. References. Unless otherwise provided, all references in this regulation to specific sections of Part 23 of the Federal Aviation Regulations are those sections of Part 23 in effect on March 30, 1967.

Flight Requirements

3. General. Compliance must be shown with the applicable requirements of Subpart B of Part 23 of the Federal Aviation Regulations in effect on March 30, 1967, as supplemented or modified in sections 4 through 10 of this regulation.

Performance

4. General. (a) Unless otherwise prescribed in this regulation, compliance with each applicable performance requirement in sections 4 through 7 of this regulation must be shown for ambient atmospheric conditions and still air.

(b) The performance must correspond to the propulsive thrust available under the particular ambient atmospheric conditions and the particular flight condition. The available propulsive thrust must correspond to engine power or thrust, not exceeding the approved power or thrust less—

(1) Installation losses; and

(2) The power or equivalent thrust absorbed by the accessories and services appropriate to the particular ambient atmospheric conditions and the particular flight condition.

(c) Unless otherwise prescribed in this regulation, the applicant must select the take-off, en route, and landing configurations for the airplane.

(d) The airplane configuration may vary with weight, altitude, and temperature, to the extent they are compatible with the operating procedures required by paragraph (e) of this section.

(e) Unless otherwise prescribed in this regulation, in determining the critical engine inoperative takeoff performance, the accelerate-stop distance, takeoff distance, changes in the airplane's configuration, speed, power, and thrust, must be made in accordance with procedures established by the applicant for operation in service.

(f) Procedures for the execution of balked landings must be established by the applicant and included in the Airplane Flight Manual.

(g) The procedures established under paragraphs (e) and (f) of this section must—

(1) Be able to be consistently executed in service by a crew of average skill;

(2) Use methods or devices that are safe and reliable; and

(3) Include allowance for any time delays, in the execution of the procedures, that may reasonably be expected in service.

5. Takeoff —(a) General. The takeoff speeds described in paragraph (b), the accelerate-stop distance described in paragraph (c), and the takeoff distance described in paragraph (d), must be determined for—

(1) Each weight, altitude, and ambient temperature within the operational limits selected by the applicant;

(2) The selected configuration for takeoff;

(3) The center of gravity in the most unfavorable position;

(4) The operating engine within approved operating limitation; and

(5) Takeoff data based on smooth, dry, hard-surface runway.

(b) Takeoff speeds. (1) The decision speed V_1 is the calibrated airspeed on the ground at which, as a result of engine failure or other reasons, the pilot is assumed to have made a decision to continue or discontinue the takeoff. The speed V_1 must be selected by the applicant but may not be less than—

(i) $1.10 V_{S1}$;

(ii) $1.10 V_{MC}$;

(iii) A speed that permits acceleration to V_1 and stop in accordance with paragraph (c) allowing credit for an overrun distance equal to that required to stop the airplane from a ground speed of 35 knots utilizing maximum braking; or

(iv) A speed at which the airplane can be rotated for takeoff and shown to be adequate to safely continue the takeoff, using normal piloting skill, when the critical engine is suddenly made inoperative.

(2) Other essential takeoff speeds necessary for safe operation of the airplane must be determined

and shown in the Airplane Flight Manual.

(c) Accelerate-stop distance. (1) The accelerate-stop distance is the sum of the distances necessary to—

(i) Accelerate the airplane from a standing start to V_1 ; and

(ii) Decelerate the airplane from V_1 to a speed not greater than 35 knots, assuming that in the case of engine failure, failure of the critical engine is recognized by the pilot at the speed V_1 . The landing gear must remain in the extended position and maximum braking may be utilized during deceleration.

(2) Means other than wheel brakes may be used to determine the accelerate-stop distance if that means is available with the critical engine inoperative and—

(i) Is safe and reliable;

(ii) Is used so that consistent results can be expected under normal operating conditions; and

(iii) Is such that exceptional skill is not required to control the airplane.

(d) All engines operating takeoff distance. The all engine operating takeoff distance is the horizontal distance required to takeoff and climb to a height of 50 feet above the takeoff surface according to procedures in FAR 23.51(a).

(e) One-engine-inoperative takeoff. The maximum weight must be determined for each altitude and temperature within the operational limits established for the airplane, at which the airplane has takeoff capability after failure of the critical engine at or above V_1 determined in accordance with paragraph (b) of this section. This capability may be established—

(1) By demonstrating a measurably positive rate of climb with the airplane in the takeoff configuration, landing gear extended; or

(2) By demonstrating the capability of maintaining flight after engine failure utilizing procedures prescribed by the applicant.

6. Climb —(a) Landing climb: All-engines-operating. The maximum weight must be determined with the airplane in the landing configuration, for each altitude, and ambient temperature within the operational limits established for the airplane and with the most unfavorable center of gravity and out-of-ground effect in free air, at which the steady gradient of climb will not be less than 3.3 percent, with:

(1) The engines at the power that is available 8 seconds after initiation of movement of the power or thrust controls from the minimum flight idle to the takeoff position.

(2) A climb speed not greater than the approach speed established under section 7 of this regulation and not less than the greater of $1.05 V_{MC}$ or $1.10 V_{S1}$.

(b) En route climb, one-engine-inoperative. (1) the maximum weight must be determined with the

airplane in the en route configuration, the critical engine inoperative, the remaining engine at not more than maximum continuous power or thrust, and the most unfavorable center of gravity, at which the gradient at climb will be not less than—

(i) 1.2 percent (or a gradient equivalent to $0.20 V_{so2}$, if greater) at 5,000 feet and an ambient temperature of 41 °F. or

(ii) 0.6 percent (or a gradient equivalent to $0.01 V_{so2}$, if greater) at 5,000 feet and ambient temperature of 81 °F.

(2) The minimum climb gradient specified in subdivisions (i) and (ii) of subparagraph (1) of this paragraph must vary linearly between 41 °F. and 81 °F. and must change at the same rate up to the maximum operational temperature approved for the airplane.

7. Landing. The landing distance must be determined for standard atmosphere at each weight and altitude in accordance with FAR 23.75(a), except that instead of the gliding approach specified in FAR 23.75(a)(1), the landing may be preceded by a steady approach down to the 50-foot height at a gradient of descent not greater than 5.2 percent (3°) at a calibrated airspeed not less than $1.3s_1$.

Trim

8. Trim —(a) Lateral and directional trim. The airplane must maintain lateral and directional trim in level flight at a speed of V_h or V_{MO}/M_{MO} , whichever is lower, with landing gear and wing flaps retracted.

(b) Longitudinal trim. The airplane must maintain longitudinal trim during the following conditions, except that it need not maintain trim at a speed greater than V_{MO}/M_{MO} :

(1) In the approach conditions specified in FAR 23.161(c)(3) through (5), except that instead of the speeds specified therein, trim must be maintained with a stick force of not more than 10 pounds down to a speed used in showing compliance with section 7 of this regulation or $1.4 V_{s1}$ whichever is lower.

(2) In level flight at any speed from V_H or V_{MO}/M_{MO} , whichever is lower, to either V_X or $1.4 V_{s1}$, with the landing gear and wing flaps retracted.

Stability

9. Static longitudinal stability. (a) In showing compliance with the provisions of FAR 23.175(b) and with paragraph (b) of this section, the airspeed must return to within $\pm 7\frac{1}{2}$ percent of the trim speed.

(b) Cruise stability. The stick force curve must have a stable slope for a speed range of ± 50 knots from the trim speed except that the speeds need not exceed V_{FC}/M_{FC} or be less than $1.4 V_{s1}$. This speed range will be considered to begin at the outer extremes of the friction band and the stick force may not exceed 50 pounds with—

(i) Landing gear retracted;

(ii) Wing flaps retracted;

(iii) The maximum cruising power as selected by the applicant as an operating limitation for turbine engines or 75 percent of maximum continuous power for reciprocating engines except that the power need not exceed that required at V_{MO}/M_{MO} :

(iv) Maximum takeoff weight; and

(v) The airplane trimmed for level flight with the power specified in subparagraph (iii) of this paragraph.

V_{FC}/M_{FC} may not be less than a speed midway between V_{MO}/M_{MO} and V_{DF}/M_{DF} , except that, for altitudes where Mach number is the limiting factor, M_{FC} need not exceed the Mach number at which effective speed warning occurs.

(c) Climb stability. For turbopropeller powered airplanes only. In showing compliance with FAR 23.175(a), an applicant must in lieu of the power specified in FAR 23.175(a)(4), use the maximum power or thrust selected by the applicant as an operating limitation for use during climb at the best rate of climb speed except that the speed need not be less than $1.4 V_{S1}$.

Stalls

10. Stall warning. If artificial stall warning is required to comply with the requirements of FAR 23.207, the warning device must give clearly distinguishable indications under expected conditions of flight. The use of a visual warning device that requires the attention of the crew within the cockpit is not acceptable by itself.

Control Systems

11. Electric trim tabs. The airplane must meet the requirements of FAR 23.677 and in addition it must be shown that the airplane is safely controllable and that a pilot can perform all the maneuvers and operations necessary to effect a safe landing following any probable electric trim tab runaway which might be reasonably expected in service allowing for appropriate time delay after pilot recognition of the runaway. This demonstration must be conducted at the critical airplane weights and center of gravity positions.

Instruments: Installation

12. Arrangement and visibility. Each instrument must meet the requirements of FAR 23.1321 and in addition—

(a) Each flight, navigation, and powerplant instrument for use by any pilot must be plainly visible to him from his station with the minimum practicable deviation from his normal position and line of vision when he is looking forward along the flight path.

(b) The flight instruments required by FAR 23.1303 and by the applicable operating rules must be grouped on the instrument panel and centered as nearly as practicable about the vertical plane of each pilot's forward vision. In addition—

(1) The instrument that most effectively indicates the attitude must be on the panel in the top center position;

- (2) The instrument that most effectively indicates airspeed must be adjacent to and directly to the left of the instrument in the top center position;
- (3) The instrument that most effectively indicates altitude must be adjacent to and directly to the right of the instrument in the top center position; and
- (4) The instrument that most effectively indicates direction of flight must be adjacent to and directly below the instrument in the top center position.

13. Airspeed indicating system. Each airspeed indicating system must meet the requirements of FAR 23.1323 and in addition—

- (a) Airspeed indicating instruments must be of an approved type and must be calibrated to indicate true airspeed at sea level in the standard atmosphere with a minimum practicable instrument calibration error when the corresponding pilot and static pressures are supplied to the instruments.
- (b) The airspeed indicating system must be calibrated to determine the system error, i.e., the relation between IAS and CAS, in flight and during the accelerate takeoff ground run. The ground run calibration must be obtained between 0.8 of the minimum value of V_1 and 1.2 times the maximum value of V_1 , considering the approved ranges of altitude and weight. The ground run calibration will be determined assuming an engine failure at the minimum value of V_1 .
- (c) The airspeed error of the installation excluding the instrument calibration error, must not exceed 3 percent or 5 knots whichever is greater, throughout the speed range from V_{MO} to $1.3 S_1$ with flaps retracted and from $1.3 V_S$ to V_{FE} with flaps in the landing position.
- (d) Information showing the relationship between IAS and CAS must be shown in the Airplane Flight Manual.

14. Static air vent system. The static air vent system must meet the requirements of FAR 23.1325. The altimeter system calibration must be determined and shown in the Airplane Flight Manual.

Operating Limitations and Information

15. Maximum operating limit speed V_{MO}/M_{MO} . Instead of establishing operating limitations based on V_{ME} and V_{NO} , the applicant must establish a maximum operating limit speed V_{MO}/M_{MO} in accordance with the following:

- (a) The maximum operating limit speed must not exceed the design cruising speed V_c and must be sufficiently below V_D/M_D or V_{DF}/M_{DF} to make it highly improbable that the latter speeds will be inadvertently exceeded in flight.
- (b) The speed V_{MO} must not exceed $0.8 V_D/M_D$ or $0.8 V_{DF}/M_{DF}$ unless flight demonstrations involving upsets as specified by the Administrator indicates a lower speed margin will not result in speeds exceeding V_D/M_D or V_{DF}/M_{DF} . Atmospheric variations, horizontal gusts, and equipment errors, and airframe production variations will be taken into account.

16. Minimum flight crew. In addition to meeting the requirements of FAR 23.1523, the applicant must establish the minimum number and type of qualified flight crew personnel sufficient for safe

operation of the airplane considering—

- (a) Each kind of operation for which the applicant desires approval;
- (b) The workload on each crewmember considering the following:
 - (1) Flight path control.
 - (2) Collision avoidance.
 - (3) Navigation.
 - (4) Communications.
 - (5) Operation and monitoring of all essential aircraft systems.
 - (6) Command decisions; and
- (c) The accessibility and ease of operation of necessary controls by the appropriate crewmember during all normal and emergency operations when at his flight station.

17. Airspeed indicator. The airspeed indicator must meet the requirements of FAR 23.1545 except that, the airspeed notations and markings in terms of V_{NO} and V_{NE} must be replaced by the V_{MO}/M_{MO} notations. The airspeed indicator markings must be easily read and understood by the pilot. A placard adjacent to the airspeed indicator is an acceptable means of showing compliance with the requirements of FAR 23.1545(c).

Airplane Flight Manual

18. General. The Airplane Flight Manual must be prepared in accordance with the requirements of FARs 23.1583 and 23.1587, and in addition the operating limitations and performance information set forth in sections 19 and 20 must be included.

19. Operating limitations. The Airplane Flight Manual must include the following limitations—

- (a) Airspeed limitations. (1) The maximum operating limit speed V_{MO}/M_{MO} and a statement that this speed limit may not be deliberately exceeded in any regime of flight (climb, cruise, or descent) unless a higher speed is authorized for flight test or pilot training;
- (2) If an airspeed limitation is based upon compressibility effects, a statement to this effect and information as to any symptoms, the probable behavior of the airplane, and the recommended recovery procedures; and
- (3) The airspeed limits, shown in terms of V_{MO}/M_{MO} instead of V_{NO} and V_{NE} .
- (b) Takeoff weight limitations. The maximum takeoff weight for each airport elevation, ambient temperature, and available takeoff runway length within the range selected by the applicant. This weight may not exceed the weight at which:
 - (1) The all-engine operating takeoff distance determined in accordance with section 5(d) or the

accelerate-stop distance determined in accordance with section 5(c), which ever is greater, is equal to the available runway length;

(2) The airplane complies with the one-engine-inoperative takeoff requirements specified in section 5(e); and

(3) The airplane complies with the one-engine-inoperative en route climb requirements specified in section 6(b), assuming that a standard temperature lapse rate exists from the airport elevation to the altitude of 5,000 feet, except that the weight may not exceed that corresponding to a temperature of 41 °F at 5,000 feet.

20. Performance information. The Airplane Flight Manual must contain the performance information determined in accordance with the provisions of the performance requirements of this regulation. The information must include the following:

(a) Sufficient information so that the take-off weight limits specified in section 19(b) can be determined for all temperatures and altitudes within the operation limitations selected by the applicant.

(b) The conditions under which the performance information was obtained, including the airspeed at the 50-foot height used to determine landing distances.

(c) The performance information (determined by extrapolation and computed for the range of weights between the maximum landing and takeoff weights) for—

(1) Climb in the landing configuration; and

(2) Landing distance.

(d) Procedure established under section 4 of this regulation related to the limitations and information required by this section in the form of guidance material including any relevant limitations or information.

(e) An explanation of significant or unusual flight or ground handling characteristics of the airplane.

(f) Airspeeds, as indicated airspeeds, corresponding to those determined for takeoff in accordance with section 5(b).

21. Maximum operating altitudes. The maximum operating altitude to which operation is permitted, as limited by flight, structural, powerplant, functional, or equipment characteristics, must be specified in the Airplane Flight Manual.

22. Stowage provision for Airplane Flight Manual. Provision must be made for stowing the Airplane Flight Manual in a suitable fixed container which is readily accessible to the pilot.

23. Operating procedures. Procedures for restarting turbine engines in flight (including the effects of altitude) must be set forth in the Airplane Flight Manual.

Airframe Requirements

flight loads

24. Engine torque. (a) Each turbopropeller engine mount and its supporting structure must be designed for the torque effects of—

- (1) The conditions set forth in FAR 23.361(a).
- (2) The limit engine torque corresponding to takeoff power and propeller speed, multiplied by a factor accounting for propeller control system malfunction, including quick feathering action, simultaneously with 1 g level flight loads. In the absence of a rational analysis, a factor of 1.6 must be used.
- (b) The limit torque is obtained by multiplying the mean torque by a factor of 1.25.

25. Turbine engine gyroscopic loads. Each turbopropeller engine mount and its supporting structure must be designed for the gyroscopic loads that result, with the engines at maximum continuous r.p.m., under either—

- (a) The conditions prescribed in FARs 23.351 and 23.423; or
- (b) All possible combinations of the following:
 - (1) A yaw velocity of 2.5 radius per second.
 - (2) A pitch velocity of 1.0 radians per second.
 - (3) A normal load factor of 2.5.
 - (4) Maximum continuous thrust.

26. Unsymmetrical loads due to engine failure. (a) Turbopropeller powered airplanes must be designed for the unsymmetrical loads resulting from the failure of the critical engine including the following conditions in combination with a single malfunction of the propeller drag limiting system, considering the probable pilot corrective action on the flight controls.

- (1) At speeds between V_{MC} and V_D , the loads resulting from power failure because of fuel flow interruption are considered to be limit loads.
- (2) At speeds between V_{MC} and V_C , the loads resulting from the disconnection of the engine compressor from the turbine or from loss of the turbine blades are considered to be ultimate loads.
- (3) The time history of the thrust decay and drag buildup occurring as a result of the prescribed engine failures must be substantiated by test or other data applicable to the particular engine-propeller combination.
- (4) The timing and magnitude of the probable pilot corrective action must be conservatively estimated, considering the characteristics of the particular engine-propeller-airplane combination.

(b) Pilot corrective action may be assumed to be initiated at the time maximum yawing velocity is reached, but not earlier than two seconds after the engine failure. The magnitude of the corrective

action may be based on the control forces specified in FAR 23.397 except that lower forces may be assumed where it is shown by analysis or test that these forces can control the yaw and roll resulting from the prescribed engine failure conditions.

Ground Loads

27. Dual wheel landing gear units. Each dual wheel landing gear unit and its supporting structure must be shown to comply with the following:

(a) Pivoting. The airplane must be assumed to pivot about one side of the main gear with the brakes on that side locked. The limit vertical load factor must be 1.0 and the coefficient of friction 0.8. This condition need apply only to the main gear and its supporting structure.

(b) Unequal tire inflation. A 60–40 percent distribution of the loads established in accordance with FAR 23.471 through FAR 23.483 must be applied to the dual wheels.

(c) Flat tire. (1) Sixty percent of the loads specified in FAR 23.471 through FAR 23.483 must be applied to either wheel in a unit.

(2) Sixty percent of the limit drag and side loads and 100 percent of the limit vertical load established in accordance with FARs 23.493 and 23.485 must be applied to either wheel in a unit except that the vertical load need not exceed the maximum vertical load in paragraph (c)(1) of this section.

Fatigue Evaluation

28. Fatigue evaluation of wing and associated structure. Unless it is shown that the structure, operating stress levels, materials, and expected use are comparable from a fatigue standpoint to a similar design which has had substantial satisfactory service experience, the strength, detail design, and the fabrication of those parts of the wing, wing carrythrough, and attaching structure whose failure would be catastrophic must be evaluated under either—

(a) A fatigue strength investigation in which the structure is shown by analysis, tests, or both to be able to withstand the repeated loads of variable magnitude expected in service; or

(b) A fail-safe strength investigation in which it is shown by analysis, tests, or both that catastrophic failure of the structure is not probable after fatigue, or obvious partial failure, of a principal structural element, and that the remaining structure is able to withstand a static ultimate load factor of 75 percent of the critical limit load factor at V_c . These loads must be multiplied by a factor of 1.15 unless the dynamic effects of failure under static load are otherwise considered.

Design and Construction

29. Flutter. For Multiengine turbopropeller powered airplanes, a dynamic evaluation must be made and must include—

(a) The significant elastic, inertia, and aerodynamic forces associated with the rotations and displacements of the plane of the propeller; and

(b) Engine-propeller-nacelle stiffness and damping variations appropriate to the particular configuration.

Landing Gear

30. Flap operated landing gear warning device. Airplanes having retractable landing gear and wing flaps must be equipped with a warning device that functions continuously when the wing flaps are extended to a flap position that activates the warning device to give adequate warning before landing, using normal landing procedures, if the landing gear is not fully extended and locked. There may not be a manual shut off for this warning device. The flap position sensing unit may be installed at any suitable location. The system for this device may use any part of the system (including the aural warning device) provided for other landing gear warning devices.

Personnel and Cargo Accommodations

31. Cargo and baggage compartments. Cargo and baggage compartments must be designed to meet the requirements of FAR 23.787 (a) and (b), and in addition means must be provided to protect passengers from injury by the contents of any cargo or baggage compartment when the ultimate forward inertia force is 9 g.

32. Doors and exits. The airplane must meet the requirements of FAR 23.783 and FAR 23.807 (a)(3), (b), and (c), and in addition:

(a) There must be a means to lock and safeguard each external door and exit against opening in flight either inadvertently by persons, or as a result of mechanical failure. Each external door must be operable from both the inside and the outside.

(b) There must be means for direct visual inspection of the locking mechanism by crewmembers to determine whether external doors and exits, for which the initial opening movement is outward, are fully locked. In addition, there must be a visual means to signal to crewmembers when normally used external doors are closed and fully locked.

(c) The passenger entrance door must qualify as a floor level emergency exit. Each additional required emergency exit except floor level exits must be located over the wing or must be provided with acceptable means to assist the occupants in descending to the ground. In addition to the passenger entrance door:

(1) For a total seating capacity of 15 or less, an emergency exit as defined in FAR 23.807(b) is required on each side of the cabin.

(2) For a total seating capacity of 16 through 23, three emergency exits as defined in 23.807(b) are required with one on the same side as the door and two on the side opposite the door.

(d) An evacuation demonstration must be conducted utilizing the maximum number of occupants for which certification is desired. It must be conducted under simulated night conditions utilizing only the emergency exits on the most critical side of the aircraft. The participants must be representative of average airline passengers with no prior practice or rehearsal for the demonstration. Evacuation must be completed within 90 seconds.

(e) Each emergency exit must be marked with the word “Exit” by a sign which has white letters 1 inch high on a red background 2 inches high, be self-illuminated or independently internally electrically illuminated, and have a minimum luminescence (brightness) of at least 160 microlamberts. The colors may be reversed if the passenger compartment illumination is essentially the same.

(f) Access to window type emergency exits must not be obstructed by seats or seat backs.

(g) The width of the main passenger aisle at any point between seats must equal or exceed the values in the following table.

Total seating capacity	Minimum main passenger aisle width	
	Less than 25 inches from floor	25 inches and more from floor
10 through 23	9 inches	15 inches.

Miscellaneous

33. Lightning strike protection. Parts that are electrically insulated from the basic airframe must be connected to it through lightning arrestors unless a lightning strike on the insulated part—

(a) Is improbable because of shielding by other parts; or

(b) Is not hazardous.

34. Ice protection. If certification with ice protection provisions is desired, compliance with the following requirements must be shown:

(a) The recommended procedures for the use of the ice protection equipment must be set forth in the Airplane Flight Manual.

(b) An analysis must be performed to establish, on the basis of the airplane's operational needs, the adequacy of the ice protection system for the various components of the airplane. In addition, tests of the ice protection system must be conducted to demonstrate that the airplane is capable of operating safely in continuous maximum and intermittent maximum icing conditions as described in FAR 25, appendix C.

(c) Compliance with all or portions of this section may be accomplished by reference, where applicable because of similarity of the designs, to analysis and tests performed by the applicant for a type certificated model.

35. Maintenance information. The applicant must make available to the owner at the time of delivery of the airplane the information he considers essential for the proper maintenance of the airplane. That information must include the following:

(a) Description of systems, including electrical, hydraulic, and fuel controls.

(b) Lubrication instructions setting forth the frequency and the lubricants and fluids which are to be used in the various systems.

- (c) Pressures and electrical loads applicable to the various systems.
- (d) Tolerances and adjustments necessary for proper functioning.
- (e) Methods of leveling, raising, and towing.
- (f) Methods of balancing control surfaces.
- (g) Identification of primary and secondary structures.
- (h) Frequency and extent of inspections necessary to the proper operation of the airplane.
- (i) Special repair methods applicable to the airplane.
- (j) Special inspection techniques, including those that require X-ray, ultrasonic, and magnetic particle inspection.
- (k) List of special tools.

Propulsion

general

36. Vibration characteristics. For turbopropeller powered airplanes, the engine installation must not result in vibration characteristics of the engine exceeding those established during the type certification of the engine.

37. In-flight restarting of engine. If the engine on turbopropeller powered airplanes cannot be restarted at the maximum cruise altitude, a determination must be made of the altitude below which restarts can be consistently accomplished. Restart information must be provided in the Airplane Flight Manual.

38. Engines —(a) For turbopropeller powered airplanes. The engine installation must comply with the following requirements:

(1) Engine isolation. The powerplants must be arranged and isolated from each other to allow operation, in at least one configuration, so that the failure or malfunction of any engine, or of any system that can affect the engine, will not—

(i) Prevent the continued safe operation of the remaining engines; or

(ii) Require immediate action by any crewmember for continued safe operation.

(2) Control of engine rotation. There must be a means to individually stop and restart the rotation of any engine in flight except that engine rotation need not be stopped if continued rotation could not jeopardize the safety of the airplane. Each component of the stopping and restarting system on the engine side of the firewall, and that might be exposed to fire, must be at least fire resistant. If hydraulic propeller feathering systems are used for this purpose, the feathering lines must be at least fire resistant under the operating conditions that may be expected to exist during feathering.

(3) Engine speed and gas temperature control devices. The powerplant systems associated with engine control devices, systems, and instrumentation must provide reasonable assurance that those engine operating limitations that adversely affect turbine rotor structural integrity will not be exceeded in service.

(b) For reciprocating-engine powered airplanes. To provide engine isolation, the powerplants must be arranged and isolated from each other to allow operation, in at least one configuration, so that the failure or malfunction of any engine, or of any system that can affect that engine, will not—

(1) Prevent the continued safe operation of the remaining engines; or

(2) Require immediate action by any crewmember for continued safe operation.

39. Turbopropeller reversing systems. (a) Turbopropeller reversing systems intended for ground operation must be designed so that no single failure or malfunction of the system will result in unwanted reverse thrust under any expected operating condition. Failure of structural elements need not be considered if the probability of this kind of failure is extremely remote.

(b) Turbopropeller reversing systems intended for in-flight use must be designed so that no unsafe condition will result during normal operation of the system, or from any failure (or reasonably likely combination of failures) of the reversing system, under any anticipated condition of operation of the airplane. Failure of structural elements need not be considered if the probability of this kind of failure is extremely remote.

(c) Compliance with this section may be shown by failure analysis, testing, or both for propeller systems that allow propeller blades to move from the flight low-pitch position to a position that is substantially less than that at the normal flight low-pitch stop position. The analysis may include or be supported by the analysis made to show compliance with the type certification of the propeller and associated installation components. Credit will be given for pertinent analysis and testing completed by the engine and propeller manufacturers.

40. Turbopropeller drag-limiting systems. Turbopropeller drag-limiting systems must be designed so that no single failure or malfunction of any of the systems during normal or emergency operation results in propeller drag in excess of that for which the airplane was designed. Failure of structural elements of the drag-limiting systems need not be considered if the probability of this kind of failure is extremely remote.

41. Turbine engine powerplant operating characteristics. For turbopropeller powered airplanes, the turbine engine powerplant operating characteristics must be investigated in flight to determine that no adverse characteristics (such as stall, surge, or flameout) are present to a hazardous degree, during normal and emergency operation within the range of operating limitations of the airplane and of the engine.

42. Fuel flow. (a) For turbopropeller powered airplanes—

(1) The fuel system must provide for continuous supply of fuel to the engines for normal operation without interruption due to depletion of fuel in any tank other than the main tank; and

(2) The fuel flow rate for turbopropeller engine fuel pump systems must not be less than 125

percent of the fuel flow required to develop the standard sea level atmospheric conditions takeoff power selected and included as an operating limitation in the Airplane Flight Manual.

(b) For reciprocating engine powered airplanes, it is acceptable for the fuel flow rate for each pump system (main and reserve supply) to be 125 percent of the takeoff fuel consumption of the engine.

Fuel System Components

43. Fuel pumps. For turbopropeller powered airplanes, a reliable and independent power source must be provided for each pump used with turbine engines which do not have provisions for mechanically driving the main pumps. It must be demonstrated that the pump installations provide a reliability and durability equivalent to that provided by FAR 23.991(a).

44. Fuel strainer or filter. For turbopropeller powered airplanes, the following apply:

(a) There must be a fuel strainer or filter between the tank outlet and the fuel metering device of the engine. In addition, the fuel strainer or filter must be—

(1) Between the tank outlet and the engine-driven positive displacement pump inlet, if there is an engine-driven positive displacement pump;

(2) Accessible for drainage and cleaning and, for the strainer screen, easily removable; and

(3) Mounted so that its weight is not supported by the connecting lines or by the inlet or outlet connections of the strainer or filter itself.

(b) Unless there are means in the fuel system to prevent the accumulation of ice on the filter, there must be means to automatically maintain the fuel flow if ice-clogging of the filter occurs; and

(c) The fuel strainer or filter must be of adequate capacity (with respect to operating limitations established to insure proper service) and of appropriate mesh to insure proper engine operation, with the fuel contaminated to a degree (with respect to particle size and density) that can be reasonably expected in service. The degree of fuel filtering may not be less than that established for the engine type certification.

45. Lightning strike protection. Protection must be provided against the ignition of flammable vapors in the fuel vent system due to lightning strikes.

Cooling

46. Cooling test procedures for turbopropeller powered airplanes. (a) Turbopropeller powered airplanes must be shown to comply with the requirements of FAR 23.1041 during takeoff, climb en route, and landing stages of flight that correspond to the applicable performance requirements. The cooling test must be conducted with the airplane in the configuration and operating under the conditions that are critical relative to cooling during each stage of flight. For the cooling tests a temperature is “stabilized” when its rate of change is less than 2 °F. per minute.

(b) Temperatures must be stabilized under the conditions from which entry is made into each stage of flight being investigated unless the entry condition is not one during which component and

engine fluid temperatures would stabilize, in which case, operation through the full entry condition must be conducted before entry into the stage of flight being investigated in order to allow temperatures to reach their natural levels at the time of entry. The takeoff cooling test must be preceded by a period during which the powerplant component and engine fluid temperatures are stabilized with the engines at ground idle.

(c) Cooling tests for each stage of flight must be continued until—

- (1) The component and engine fluid temperatures stabilize;
- (2) The stage of flight is completed; or
- (3) An operating limitation is reached.

Induction System

47. Air induction. For turbopropeller powered airplanes—

- (a) There must be means to prevent hazardous quantities of fuel leakage or overflow from drains, vents, or other components of flammable fluid systems from entering the engine intake system; and
- (b) The air inlet ducts must be located or protected so as to minimize the ingestion of foreign matter during takeoff, landing, and taxiing.

48. Induction system icing protection. For turbopropeller powered airplanes, each turbine engine must be able to operate throughout its flight power range without adverse effect on engine operation or serious loss of power or thrust, under the icing conditions specified in appendix C of FAR 25. In addition, there must be means to indicate to appropriate flight crewmembers the functioning of the powerplant ice protection system.

49. Turbine engine bleed air systems. Turbine engine bleed air systems of turbopropeller powered airplanes must be investigated to determine—

- (a) That no hazard to the airplane will result if a duct rupture occurs. This condition must consider that a failure of the duct can occur anywhere between the engine port and the airplane bleed service; and
- (b) That if the bleed air system is used for direct cabin pressurization, it is not possible for hazardous contamination of the cabin air system to occur in event of lubrication system failure.

Exhaust System

50. Exhaust system drains. Turbopropeller engine exhaust systems having low spots or pockets must incorporate drains at such locations. These drains must discharge clear of the airplane in normal and ground attitudes to prevent the accumulation of fuel after the failure of an attempted engine start.

Powerplant Controls and Accessories

51. Engine controls. If throttles or power levers for turbopropeller powered airplanes are such that any position of these controls will reduce the fuel flow to the engine(s) below that necessary for satisfactory and safe idle operation of the engine while the airplane is in flight, a means must be provided to prevent inadvertent movement of the control into this position. The means provided must incorporate a positive lock or stop at this idle position and must require a separate and distinct operation by the crew to displace the control from the normal engine operating range.

52. Reverse thrust controls. For turbopropeller powered airplanes, the propeller reverse thrust controls must have a means to prevent their inadvertent operation. The means must have a positive lock or stop at the idle position and must require a separate and distinct operation by the crew to displace the control from the flight regime.

53. Engine ignition systems. Each turbopropeller airplane ignition system must be considered an essential electrical load.

54. Powerplant accessories. The powerplant accessories must meet the requirements of FAR 23.1163, and if the continued rotation of any accessory remotely driven by the engine is hazardous when malfunctioning occurs, there must be means to prevent rotation without interfering with the continued operation of the engine.

Powerplant Fire Protection

55. Fire detector system. For turbopropeller powered airplanes, the following apply:

- (a) There must be a means that ensures prompt detection of fire in the engine compartment. An overtemperature switch in each engine cooling air exit is an acceptable method of meeting this requirement.
- (b) Each fire detector must be constructed and installed to withstand the vibration, inertia, and other loads to which it may be subjected in operation.
- (c) No fire detector may be affected by any oil, water, other fluids, or fumes that might be present.
- (d) There must be means to allow the flight crew to check, in flight, the functioning of each fire detector electric circuit.
- (e) Wiring and other components of each fire detector system in a fire zone must be at least fire resistant.

56. Fire protection, cowling and nacelle skin. For reciprocating engine powered airplanes, the engine cowling must be designed and constructed so that no fire originating in the engine compartment can enter, either through openings or by burn through, any other region where it would create additional hazards.

57. Flammable fluid fire protection. If flammable fluids or vapors might be liberated by the leakage of fluid systems in areas other than engine compartments, there must be means to—

- (a) Prevent the ignition of those fluids or vapors by any other equipment; or
- (b) Control any fire resulting from that ignition.

Equipment

58. Powerplant instruments. (a) The following are required for turbopropeller airplanes:

- (1) The instruments required by FAR 23.1305 (a)(1) through (4), (b)(2) and (4).
 - (2) A gas temperature indicator for each engine.
 - (3) Free air temperature indicator.
 - (4) A fuel flowmeter indicator for each engine.
 - (5) Oil pressure warning means for each engine.
 - (6) A torque indicator or adequate means for indicating power output for each engine.
 - (7) Fire warning indicator for each engine.
 - (8) A means to indicate when the propeller blade angle is below the low-pitch position corresponding to idle operation in flight.
 - (9) A means to indicate the functioning of the ice protection system for each engine.
- (b) For turbopropeller powered airplanes, the turbopropeller blade position indicator must begin indicating when the blade has moved below the flight low-pitch position.
- (c) The following instruments are required for reciprocating-engine powered airplanes:
- (1) The instruments required by FAR 23.1305.
 - (2) A cylinder head temperature indicator for each engine.
 - (3) A manifold pressure indicator for each engine.

Systems and Equipments

general

59. Function and installation. The systems and equipment of the airplane must meet the requirements of FAR 23.1301, and the following:

- (a) Each item of additional installed equipment must—
- (1) Be of a kind and design appropriate to its intended function;
 - (2) Be labeled as to its identification, function, or operating limitations, or any applicable combination of these factors, unless misuse or inadvertent actuation cannot create a hazard;
 - (3) Be installed according to limitations specified for that equipment; and

(4) Function properly when installed.

(b) Systems and installations must be designed to safeguard against hazards to the aircraft in the event of their malfunction or failure.

(c) Where an installation, the functioning of which is necessary in showing compliance with the applicable requirements, requires a power supply, such installation must be considered an essential load on the power supply, and the power sources and the distribution system must be capable of supplying the following power loads in probable operation combinations and for probable durations:

(1) All essential loads after failure of any prime mover, power converter, or energy storage device.

(2) All essential loads after failure of any one engine on two-engine airplanes.

(3) In determining the probable operating combinations and durations of essential loads for the power failure conditions described in subparagraphs (1) and (2) of this paragraph, it is permissible to assume that the power loads are reduced in accordance with a monitoring procedure which is consistent with safety in the types of operations authorized.

60. Ventilation. The ventilation system of the airplane must meet the requirements of FAR 23.831, and in addition, for pressurized aircraft the ventilating air in flight crew and passenger compartments must be free of harmful or hazardous concentrations of gases and vapors in normal operation and in the event of reasonably probable failures or malfunctioning of the ventilating, heating, pressurization, or other systems, and equipment. If accumulation of hazardous quantities of smoke in the cockpit area is reasonably probable, smoke evacuation must be readily accomplished.

Electrical Systems and Equipment

61. General. The electrical systems and equipment of the airplane must meet the requirements of FAR 23.1351, and the following:

(a) Electrical system capacity. The required generating capacity, and number and kinds of power sources must—

(1) Be determined by an electrical load analysis, and

(2) Meet the requirements of FAR 23.1301.

(b) Generating system. The generating system includes electrical power sources, main power busses, transmission cables, and associated control, regulation, and protective devices. It must be designed so that—

(1) The system voltage and frequency (as applicable) at the terminals of all essential load equipment can be maintained within the limits for which the equipment is designed, during any probable operating conditions;

(2) System transients due to switching, fault clearing, or other causes do not make essential loads inoperative, and do not cause a smoke or fire hazard;

(3) There are means, accessible in flight to appropriate crewmembers, for the individual and collective disconnection of the electrical power sources from the system; and

(4) There are means to indicate to appropriate crewmembers the generating system quantities essential for the safe operation of the system, including the voltage and current supplied by each generator.

62. Electrical equipment and installation. Electrical equipment controls, and wiring must be installed so that operation of any one unit or system of units will not adversely affect the simultaneous operation of to the safe operation.

63. Distribution system. (a) For the purpose of complying with this section, the distribution system includes the distribution busses, their associated feeders and each control and protective device.

(b) Each system must be designed so that essential load circuits can be supplied in the event of reasonably probable faults or open circuits, including faults in heavy current carrying cables.

(c) If two independent sources of electrical power for particular equipment or systems are required by this regulation, their electrical energy supply must be insured by means such as duplicate electrical equipment, throwover switching, or multichannel or loop circuits separately routed.

64. Circuit protective devices. The circuit protective devices for the electrical circuits of the airplane must meet the requirements of FAR 23.1357, and in addition circuits for loads which are essential to safe operation must have individual and exclusive circuit protection.

[Doc. No. 8070, 34 FR 189, Jan. 7, 1969, as amended by SFAR 23-1, 34 FR 20176, Dec. 24, 1969; 35 FR 1102, Jan. 28, 1970]

Subpart A—General

§ 23.1 Applicability.

(a) This part prescribes airworthiness standards for the issue of type certificates, and changes to those certificates, for airplanes in the normal, utility, acrobatic, and commuter categories.

(b) Each person who applies under Part 21 for such a certificate or change must show compliance with the applicable requirements of this part.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-34, 52 FR 1825, Jan. 15, 1987]

§ 23.2 Special retroactive requirements.

(a) Notwithstanding §§21.17 and 21.101 of this chapter and irrespective of the type certification basis, each normal, utility, and acrobatic category airplane having a passenger seating configuration, excluding pilot seats, of nine or less, manufactured after December 12, 1986, or any such foreign airplane for entry into the United States must provide a safety belt and shoulder harness for each forward- or aft-facing seat which will protect the occupant from serious head injury when subjected to the inertia loads resulting from the ultimate static load factors prescribed in §23.561(b)(2) of this

part, or which will provide the occupant protection specified in §23.562 of this part when that section is applicable to the airplane. For other seat orientations, the seat/restraint system must be designed to provide a level of occupant protection equivalent to that provided for forward- or aft-facing seats with a safety belt and shoulder harness installed.

(b) Each shoulder harness installed at a flight crewmember station, as required by this section, must allow the crewmember, when seated with the safety belt and shoulder harness fastened, to perform all functions necessary for flight operations.

(c) For the purpose of this section, the date of manufacture is:

(1) The date the inspection acceptance records, or equivalent, reflect that the airplane is complete and meets the FAA approved type design data; or

(2) In the case of a foreign manufactured airplane, the date the foreign civil airworthiness authority certifies the airplane is complete and issues an original standard airworthiness certificate, or the equivalent in that country.

[Amdt. 23–36, 53 FR 30812, Aug. 15, 1988]

<p>23.3 Airplane categories.</p> <p>(a) The normal category is limited to airplanes that have a seating configuration, excluding pilot seats, of nine or less, a maximum certificated takeoff weight of 12.500 pounds (5.670 kg) or less, and intended for nonacrobatic operation. Nonacrobatic operation includes:</p> <p>(1) Any maneuver incident to normal flying;</p> <p>(2) Stalls (except whip stalls); and</p> <p>(3) Lazy eights, chandelles, and steep turns, in which the angle of bank is not more than 60 degrees.</p> <p>(b) The utility category is limited to airplanes that have a seating configuration, excluding pilot seats, of nine or less, a maximum certificated takeoff weight of 12.500 pounds (5.670 kg) or less, and intended for limited acrobatic operation. Airplanes certificated in the utility category may be used in any of the operations covered under paragraph (a) of this section and in limited acrobatic operations. Limited acrobatic operation includes:</p>	<p>23.3 Categorias de aviões.</p> <p>(a) A categoria normal é limitada a aviões que possuem configuração de nove ou menos assentos, excluindo-se os assentos para pilotos, peso máximo de decolagem certificado de 12.500 lb (5.670 kg) ou menos e projetado para operação não acrobática. Operação não acrobática inclui:</p> <p>(1) Qualquer manobra provável em voo normal;</p> <p>(2) Estóis (exceto estóis whip); e</p> <p>(3) Oitos preguiçosos, chandelles e curvas acentuadas em que o ângulo de inclinação lateral não exceda 60 (sessenta) graus.</p> <p>(b) A categoria utilidade é limitada a aviões que possuem configuração de nove ou menos assentos, excluindo-se os assentos para pilotos, peso máximo de decolagem certificado de 12.500 lb (5.670 kg) ou menos e projetado para operação acrobática limitada. Aviões certificados na categoria utilidade podem ser usados em qualquer das operações especificadas no parágrafo (a) desta seção e em operações acrobáticas limitadas. A operação</p>
---	---

<p>(1) Spins (if approved for the particular type of airplane); and</p> <p>(2) Lazy eights, chandelles, and steep turns, or similar maneuvers, in which the angle of bank is more than 60 degrees but not more than 90 degrees.</p> <p>(c) The acrobatic category is limited to airplanes that have a seating configuration, excluding pilot seats, of nine or less, a maximum certificated takeoff weight of 12.500 pounds (5.670 kg) or less, and intended for use without restrictions, other than those shown to be necessary as a result of required flight tests.</p> <p>(d) The commuter category is limited to multiengine airplanes that have a seating configuration, excluding pilot seats, of 19 or less, and a maximum certificated takeoff weight of 19.000 pounds (8.618 kg) or less. The commuter category operation is limited to any maneuver incident to normal flying, stalls (except whip stalls), and steep turns, in which the angle of bank is not more than 60 degrees.</p> <p>(e) Except for commuter category, airplanes may be type certificated in more than one category if the requirements of each requested category are met.</p>	<p>acrobática limitada inclui:</p> <p>(1) Parafusos (se aprovado para o tipo específico de avião); e</p> <p>(2) Oitos preguiçosos, chandelles e curvas acentuadas, ou manobras similares, em que o ângulo de inclinação lateral é maior que 60 (sessenta) graus, mas igual ou menor que 90 (noventa) graus.</p> <p>(c) A categoria acrobática é limitada a aviões que possuem configuração de nove ou menos assentos, excluindo-se os assentos para pilotos, peso máximo de decolagem certificado de 12.500 lb (5.670 kg) ou menos e projetado para uso sem restrições além daquelas comprovadamente necessárias como resultado de ensaios em voo requeridos.</p> <p>(d) A categoria transporte regional é limitada a aviões multimotores que possuem configuração de 19 (dezenove) ou menos assentos, excluindo-se os assentos para pilotos, e peso máximo de decolagem certificado de 19.000 lb (8.618 kg) ou menos. A operação da categoria transporte regional é limitada a qualquer manobra provável em voo normal, estóis (exceto estóis whip) e curvas acentuadas em que o ângulo de inclinação lateral não exceda 60 (sessenta) graus.</p> <p>(e) Exceto para a categoria transporte regional, aviões podem ser certificados em mais de uma categoria se os requisitos para cada categoria solicitada forem cumpridos.</p>
--	--

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-4, 32 FR 5934, Apr. 14, 1967; Amdt. 23-34, 52 FR 1825, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23-50, 61 FR 5183, Feb. 9, 1996; Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

Subpart B—Flight

General

§ 23.21 Proof of compliance.

(a) Each requirement of this subpart must be met at each appropriate combination of weight and center of gravity within the range of loading conditions for which certification is requested. This must be shown—

- (1) By tests upon an airplane of the type for which certification is requested, or by calculations based on, and equal in accuracy to, the results of testing; and
- (2) By systematic investigation of each probable combination of weight and center of gravity, if compliance cannot be reasonably inferred from combinations investigated.
- (b) The following general tolerances are allowed during flight testing. However, greater tolerances may be allowed in particular tests:

Item	Tolerance
Weight	+5%, -10%.
Critical items affected by weight	+5%, -1%.
C.G	±7% total travel.

§ 23.23 Load distribution limits.

- (a) Ranges of weights and centers of gravity within which the airplane may be safely operated must be established. If a weight and center of gravity combination is allowable only within certain lateral load distribution limits that could be inadvertently exceeded, these limits must be established for the corresponding weight and center of gravity combinations.
- (b) The load distribution limits may not exceed any of the following:
- (1) The selected limits;
 - (2) The limits at which the structure is proven; or
 - (3) The limits at which compliance with each applicable flight requirement of this subpart is shown.

[Doc. No. 26269, 58 FR 42156, Aug. 6, 1993]

§ 23.25 Weight limits.

- (a) Maximum weight. The maximum weight is the highest weight at which compliance with each applicable requirement of this part (other than those complied with at the design landing weight) is shown. The maximum weight must be established so that it is—
- (1) Not more than the least of—
 - (i) The highest weight selected by the applicant; or
 - (ii) The design maximum weight, which is the highest weight at which compliance with each applicable structural loading condition of this part (other than those complied with at the design landing weight) is shown; or

(iii) The highest weight at which compliance with each applicable flight requirement is shown, and

(2) Not less than the weight with—

(i) Each seat occupied, assuming a weight of 170 pounds for each occupant for normal and commuter category airplanes, and 190 pounds for utility and acrobatic category airplanes, except that seats other than pilot seats may be placarded for a lesser weight; and

(A) Oil at full capacity, and

(B) At least enough fuel for maximum continuous power operation of at least 30 minutes for day-VFR approved airplanes and at least 45 minutes for night-VFR and IFR approved airplanes; or

(ii) The required minimum crew, and fuel and oil to full tank capacity.

(b) Minimum weight. The minimum weight (the lowest weight at which compliance with each applicable requirement of this part is shown) must be established so that it is not more than the sum of—

(1) The empty weight determined under §23.29;

(2) The weight of the required minimum crew (assuming a weight of 170 pounds for each crewmember); and

(3) The weight of—

(i) For turbojet powered airplanes, 5 percent of the total fuel capacity of that particular fuel tank arrangement under investigation, and

(ii) For other airplanes, the fuel necessary for one-half hour of operation at maximum continuous power.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13086, Aug. 13, 1969; Amdt. 23-21, 43 FR 2317, Jan. 16, 1978; Amdt. 23-34, 52 FR 1825, Jan. 15, 1987; Amdt. 23-45, 58 FR 42156, Aug. 6, 1993; Amdt. 23-50, 61 FR 5183, Feb. 9, 1996]

§ 23.29 Empty weight and corresponding center of gravity.

(a) The empty weight and corresponding center of gravity must be determined by weighing the airplane with—

(1) Fixed ballast;

(2) Unusable fuel determined under §23.959; and

(3) Full operating fluids, including—

(i) Oil;

(ii) Hydraulic fluid; and

(iii) Other fluids required for normal operation of airplane systems, except potable water, lavatory precharge water, and water intended for injection in the engines.

(b) The condition of the airplane at the time of determining empty weight must be one that is well defined and can be easily repeated.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–21, 43 FR 2317, Jan. 16, 1978]

§ 23.31 Removable ballast.

Removable ballast may be used in showing compliance with the flight requirements of this subpart, if—

(a) The place for carrying ballast is properly designed and installed, and is marked under §23.1557; and

(b) Instructions are included in the airplane flight manual, approved manual material, or markings and placards, for the proper placement of the removable ballast under each loading condition for which removable ballast is necessary.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–13, 37 FR 20023, Sept. 23, 1972]

§ 23.33 Propeller speed and pitch limits.

(a) General. The propeller speed and pitch must be limited to values that will assure safe operation under normal operating conditions.

(b) Propellers not controllable in flight. For each propeller whose pitch cannot be controlled in flight—

(1) During takeoff and initial climb at the all engine(s) operating climb speed specified in §23.65, the propeller must limit the engine r.p.m., at full throttle or at maximum allowable takeoff manifold pressure, to a speed not greater than the maximum allowable takeoff r.p.m.; and

(2) During a closed throttle glide, at V_{NE} , the propeller may not cause an engine speed above 110 percent of maximum continuous speed.

(c) Controllable pitch propellers without constant speed controls. Each propeller that can be controlled in flight, but that does not have constant speed controls, must have a means to limit the pitch range so that—

(1) The lowest possible pitch allows compliance with paragraph (b)(1) of this section; and

(2) The highest possible pitch allows compliance with paragraph (b)(2) of this section.

(d) Controllable pitch propellers with constant speed controls. Each controllable pitch propeller with constant speed controls must have—

(1) With the governor in operation, a means at the governor to limit the maximum engine speed to the maximum allowable takeoff r.p.m.; and

(2) With the governor inoperative, the propeller blades at the lowest possible pitch, with takeoff power, the airplane stationary, and no wind, either—

(i) A means to limit the maximum engine speed to 103 percent of the maximum allowable takeoff r.p.m., or

(ii) For an engine with an approved overspeed, a means to limit the maximum engine and propeller speed to not more than the maximum approved overspeed.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42156, Aug. 6, 1993; Amdt. 23–50, 61 FR 5183, Feb. 9, 1996]

Performance

23.45 General.	23.45 Geral.
<p>(a) Unless otherwise prescribed, the performance requirements of this part must be met for:</p> <p>(1) Still air and standard atmosphere; and</p> <p>(2) Ambient atmospheric conditions, for commuter category airplanes, for reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight, and for turbine engine-powered airplanes.</p> <p>(b) Performance data must be determined over not less than the following ranges of conditions:</p> <p>(1) Airport altitudes from sea level to 10.000 feet; and</p> <p>(2) For reciprocating engine-powered airplanes of 6.000 pounds (2.722 kg), or less, maximum weight, temperature from standard to 30 °C above standard; or</p> <p>(3) For reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight and turbine engine-powered airplanes, temperature from standard to 30 °C</p>	<p>(a) A menos que prescrito de outra forma, os requisitos de desempenho desta parte devem ser cumpridos para:</p> <p>(1) Ar calmo e atmosfera padrão; e</p> <p>(2) Condições atmosféricas ambiente, para aviões da categoria transporte regional, para aviões com motores convencionais com mais de 6.000 libras (2.722 kg) de peso máximo e para aviões propulsados por motores a turbina.</p> <p>(b) Os dados de desempenho devem ser determinados numa faixa de condições não menos abrangente que:</p> <p>(1) Altitude dos aeródromos do nível do mar até 10.000 pés; e</p> <p>(2) Para aviões propulsados por motores convencionais com peso de 6.000 libras (2.722 kg) ou menos, no peso máximo, numa faixa de temperaturas variando do padrão até 30 °C acima do padrão; ou</p> <p>(3) Para aviões propulsados por motores convencionais com peso máximo maior que 6.000 libras (2.722 kg) ou propulsados por</p>

above standard, or the maximum ambient atmospheric temperature at which compliance with the cooling provisions of sections 23.1041 to 23.1047 is shown, if lower.

(c) Performance data must be determined with the cowl flaps or other means for controlling the engine cooling air supply in the position used in the cooling tests required by sections 23.1041 to 23.1047.

(d) The available propulsive thrust must correspond to engine power, not exceeding the approved power, less:

(1) Installation losses; and

(2) The power absorbed by the accessories and services appropriate to the particular ambient atmospheric conditions and the particular flight condition.

(e) The performance, as affected by engine power or thrust, must be based on a relative humidity:

(1) Of 80 percent at and below standard temperature; and

(2) From 80 percent, at the standard temperature, varying linearly down to 34 percent at the standard temperature plus 50 °F (10°C).

(f) Unless otherwise prescribed, in determining the takeoff and landing distances, changes in the airplane's configuration, speed, and power must be made in accordance with procedures established by the applicant for operation in service. These procedures must be able to be executed consistently by pilots of average skill in atmospheric conditions reasonably expected to be encountered in service.

(g) The following, as applicable, must be determined on a smooth, dry, hard-surfaced runway—

motores à turbina, em temperaturas varrendo do padrão até 30 °C acima do padrão ou na máxima temperatura atmosférica ambiente, na qual é mostrada a conformidade com as provisões de refrigeração das seções 23.1041 à 23.1047, se mais baixa.

(c) Os dados de desempenho devem ser determinados com a portinhola de refrigeração ou outros meios para controlar o suprimento de ar para refrigeração do motor na posição usada nos testes de refrigeração requeridos nas seções 23.1041 à 23.1047.

(d) A tração propulsora disponível deve corresponder à potência do motor, não excedendo à potência aprovada, menos:

(1) As perdas de instalação; e

(2) A potência absorvida pelos acessórios e os serviços apropriados para as condições particulares de ambiente atmosférico e para a condição particular de voo.

(e) O desempenho, na parte afetada pela potência ou tração do motor, deve ser baseado na umidade relativa:

(1) De 80 por cento, na temperatura padrão ou abaixo dela; e

(2) A partir de 80 por cento, na temperatura padrão, variando linearmente até 34 por cento na temperatura padrão mais 50 °F (10 °C).

(f) A menos que seja prescrito de outra maneira, na determinação das distâncias para decolagem e pouso, mudanças na configuração do avião, velocidade e potência devem ser feitas de acordo com os procedimentos operacionais estabelecidos pelo requerente para operação em serviço. Estes procedimentos devem ser possíveis de serem executados, consistentemente, por pilotos de habilidade mediana e em condições atmosféricas, razoavelmente esperadas de serem encontradas em serviço.

<p>(1) Takeoff distance of paragraph 23.53(b);</p> <p>(2) Accelerate-stop distance of section 23.55;</p> <p>(3) Takeoff distance and takeoff run of section 23.59; and</p> <p>(4) Landing distance of section 23.75.</p> <p>Note: The effect on these distances of operation on other types of surfaces (for example, grass, gravel) when dry, may be determined or derived and these surfaces listed in the Airplane Flight Manual in accordance with paragraph 23.1583(p).</p> <p>(h) For multiengine jets weighing over 6.000 pounds (2.722 kg) in the normal, utility, and acrobatic category and commuter category airplanes, the following also apply:</p> <p>(1) Unless otherwise prescribed, the applicant must select the takeoff, enroute, approach, and landing configurations for the airplane.</p> <p>(2) The airplane configuration may vary with weight, altitude, and temperature, to the extent that they are compatible with the operating procedures required by paragraph (h)(3) of this section.</p> <p>(3) Unless otherwise prescribed, in determining the critical-engine-inoperative takeoff performance, takeoff flight path, and accelerate-stop distance, changes in the airplane's configuration, speed, and power must be made in accordance with procedures established by the applicant for operation in service.</p> <p>(4) Procedures for the execution of discontinued approaches and balked landings associated with the conditions prescribed in paragraphs 23.67(d)(4) and 23.77(c) must be established.</p> <p>(5) The procedures established under paragraphs (h)(3) and (h)(4) of this section</p>	<p>(g) Os seguintes dados, quando aplicáveis, devem ser determinados em uma pista lisa, seca e superfície dura:</p> <p>(1) Distância de decolagem do parágrafo 23.53(b);</p> <p>(2) Distância de aceleração e parada da seção 23.55;</p> <p>(3) Distância de decolagem e corrida de decolagem da seção 23.59; e</p> <p>(4) Distância de pouso da seção 23.75.</p> <p>Nota: O efeito nestas distâncias em operações em outros tipos de superfície (por exemplo, grama, cascalho), quando secas, pode ser determinado ou derivado e estas superfícies listadas no manual de voo aprovado de acordo com parágrafo 23.1583(p).</p> <p>(h) Para jatos multimotores pesando acima de 6,000 libras (2.722 kg) das categorias normal, utilidade, e acrobática e aviões da categoria transporte regional, também se aplica o seguinte:</p> <p>(1) A menos que seja prescrito de outra maneira, o requerente deve indicar as configurações dos aviões para decolagem, cruzeiro, aproximação e pouso.</p> <p>(2) A configuração do avião pode variar com o peso, altitude e temperatura, desde que elas sejam compatíveis com os procedimentos operacionais requeridos pelo parágrafo (h)(3) desta seção.</p> <p>(3) A menos que seja prescrito de outra maneira, na determinação do desempenho de decolagem com motor crítico inoperante, trajetória de voo na decolagem e distância de aceleração e parada, mudanças na configuração do avião, velocidade e potência devem ser feitas de acordo com os procedimentos estabelecidos pelo requerente para a operação em serviço.</p>
--	---

<p>must:</p> <p>(i) Be able to be consistently executed by a crew of average skill in atmospheric conditions reasonably expected to be encountered in service;</p> <p>(ii) Use methods or devices that are safe and reliable; and</p> <p>(iii) Include allowance for any reasonably expected time delays in the execution of the procedures.</p>	<p>(4) Devem ser estabelecidos procedimentos para a execução de aproximações descontínuadas e arremetidas no pouso, associadas com as condições prescritas nos parágrafos 23.67(d)(4) e 23.77(c).</p> <p>(5) Os procedimentos estabelecidos sob os parágrafos (h)(3) e (h)(4) desta seção devem:</p> <p>(i) Ser capazes de, consistentemente, serem executados por um tripulante de habilidade mediana e em uma condição atmosférica razoavelmente esperada de se encontrar em serviço;</p> <p>(ii) Usar métodos ou dispositivos que sejam seguros e confiáveis; e</p> <p>(iii) Incluir tolerância para qualquer atraso de tempo razoável esperado na execução dos procedimentos.</p>
--	---

[Doc. No. 27807, 61 FR 5184, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.49 Stalling speed.</p> <p>(a) V_{S0} (maximum landing flap configuration) and V_{S1} are the stalling speeds or the minimum steady flight speeds, in knots (CAS), at which the airplane is controllable with:</p> <p>(1) For reciprocating engine-powered airplanes, the engine(s) idling, the throttle(s) closed or at not more than the power necessary for zero thrust at a speed not more than 110 percent of the stalling speed;</p> <p>(2) For turbine engine-powered airplanes, the propulsive thrust not greater than zero at the stalling speed, or, if the resultant thrust has no appreciable effect on the stalling speed, with engine(s) idling and throttle(s) closed;</p> <p>(3) The propeller(s) in the takeoff position;</p> <p>(4) The airplane in the condition existing in the test, in which V_{S0} and V_{S1} are being used;</p>	<p>23.49 Velocidade de estol.</p> <p>(a) V_{S0} (configuração com máximos flapes de pouso) e V_{S1} são as velocidades de estol ou velocidades mínimas de voo estabilizado, em nós (CAS), nas quais o avião é controlável com:</p> <p>(1) Para aviões propelidos por motores convencionais, o(s) motor(es) em marcha lenta, a(s) manete(s) de potência fechada(s) ou em não mais do que a potência necessária para tração zero a uma velocidade não superior a 110 por cento da velocidade de estol;</p> <p>(2) Para aviões propelidos por motores à turbina, o empuxo não maior que zero na velocidade de estol, ou, se o empuxo resultante não tiver efeito apreciável na velocidade de estol, com o(s) motor(es) em marcha lenta e a(s) manete(s) de potência fechada(s);</p> <p>(3) A(s) hélice(s) na posição de decolagem;</p>
--	--

<p>(5) The center of gravity in the position that results in the highest value of V_{S0} and V_{S1}; and</p> <p>(6) The weight used when V_{S0} and V_{S1} are being used as a factor to determine compliance with a required performance standard.</p> <p>(b) V_{S0} and V_{S1} must be determined by flight tests, using the procedure and meeting the flight characteristics specified in section 23.201.</p> <p>(c) Except as provided in paragraph (d) of this section, V_{S0} at maximum weight may not exceed 61 knots (31,4 m/s) for:</p> <p>(1) Single-engine airplanes; and</p> <p>(2) Multiengine airplanes of 6.000 pounds (2.722 kg) or less maximum weight that cannot meet the minimum rate of climb specified in paragraph 23.67(a) (1) with the critical engine inoperative.</p> <p>(d) All single-engine airplanes, and those multiengine airplanes of 6.000 pounds (2.722 kg) or less maximum weight with a V_{S0} of more than 61 knots that do not meet the requirements of paragraph 23.67(a)(1), must comply with paragraph 23.562(d).</p>	<p>(4) O avião na condição existente no ensaio, no qual a V_{S0} e V_{S1} estão sendo usadas;</p> <p>(5) O centro de gravidade na posição que resulta no maior valor da V_{S0} e V_{S1}; e</p> <p>(6) O peso utilizado quando a V_{S0} e V_{S1} estão sendo usadas como um fator para determinar cumprimento com uma norma de desempenho requerida.</p> <p>(b) V_{S0} e V_{S1} devem ser determinadas por ensaios em voo, usando o procedimento e satisfazendo as características de voo especificados na seção 23.201.</p> <p>(c) Exceto como previsto no parágrafo (d) desta seção, a V_{S0} no peso máximo não pode exceder 61 nós (31,4 m/s) para:</p> <p>(1) Aviões monomotores; e</p> <p>(2) Aviões multimotores de 6.000 libras (2.722 kg) ou menos de peso máximo que não conseguem cumprir a razão mínima de subida especificada no parágrafo 23.67(a)(1) com o motor crítico inoperante.</p> <p>(d) Todos os aviões monomotores, e aqueles aviões multimotores de 6.000 libras (2.722 kg) ou menos de peso máximo com uma V_{S0} de mais que 61 nós (31,4 m/s) que não cumprem os requisitos do parágrafo 23.67(a)(1), devem cumprir com o parágrafo 23.562(d).</p>
---	---

[Doc. No. 27807, 61 FR 5184, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.51 Takeoff speeds.</p> <p>(a) For normal, utility, and acrobatic category airplanes, rotation speed, V_R, is the speed at which the pilot makes a control input, with the intention of lifting the airplane out of contact with the runway or water surface.</p> <p>(1) For multiengine landplanes, V_R, must not be less than the greater of 1,05 V_{MC}; or 1,10</p>	<p>23.51 Velocidades de decolagem.</p> <p>(a) Para aviões das categorias normal, utilidade e acrobática, a velocidade de rotação, V_R, é a velocidade na qual o piloto executa um comando nos controles com a intenção de levantar o avião do contato com a pista ou superfície da água.</p> <p>(1) Para aviões terrestres multimotores, a V_R não pode ser menor que o maior entre 1,05 V_{MC}</p>
--	---

<p>V_{S1};</p> <p>(2) For single-engine landplanes, V_R, must not be less than V_{S1}; and</p> <p>(3) For seaplanes and amphibians taking off from water, V_R, may be any speed that is shown to be safe under all reasonably expected conditions, including turbulence and complete failure of the critical engine.</p> <p>(b) For normal, utility, and acrobatic category airplanes, the speed at 50 feet (15,24 m) above the takeoff surface level must not be less than:</p> <p>(1) For multiengine airplanes, the highest of:</p> <p>(i) A speed that is shown to be safe for continued flight (or emergency landing, if applicable) under all reasonably expected conditions, including turbulence and complete failure of the critical engine;</p> <p>(ii) $1,10 V_{MC}$; or</p> <p>(iii) $1,20 V_{S1}$.</p> <p>(2) For single-engine airplanes, the higher of:</p> <p>(i) A speed that is shown to be safe under all reasonably expected conditions, including turbulence and complete engine failure; or</p> <p>(ii) $1,20 V_{S1}$.</p> <p>(c) For normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, the following apply:</p> <p>(1) V_1 must be established in relation to V_{EF} as follows:</p> <p>(i) V_{EF} is the calibrated airspeed at which the critical engine is assumed to fail. V_{EF} must be selected by the applicant but must not be less than $1,05 V_{MC}$ determined under paragraph 23.149(b) or, at the option of the applicant, not less than V_{MCG} determined under paragraph</p>	<p>ou $1,10 V_{S1}$;</p> <p>(2) Para aviões terrestres monomotores, a V_R, não pode ser inferior a V_{S1}; e</p> <p>(3) Para hidroaviões e aviões anfíbios decolando da água, a V_R, pode ser qualquer velocidade que seja demonstrada segura sob todas as condições razoavelmente esperadas, incluindo turbulência e falha completa do motor crítico.</p> <p>(b) Para aviões das categorias normal, utilidade e acrobática, a velocidade a 50 pés (15,24 m) acima do nível da superfície de decolagem não pode ser inferior a:</p> <p>(1) Para aviões multimotores, o maior entre:</p> <p>(i) Uma velocidade que seja demonstrada segura para a continuidade do voo (ou pouso de emergência, se aplicável), sob todas as condições razoavelmente esperadas, incluindo turbulência e falha completa do motor crítico;</p> <p>(ii) $1,10 V_{MC}$, ou</p> <p>(iii) $1,20 V_{S1}$.</p> <p>(2) Para aviões monomotores, o maior entre:</p> <p>(i) Uma velocidade que seja demonstrada segura sob todas as condições razoavelmente esperadas, incluindo turbulência e falha completa de motor; ou</p> <p>(ii) $1,20 V_{S1}$.</p> <p>(c) Para aviões a jato multimotores com peso máximo superior a 6.000 libras (2.722 kg) das categorias normal, utilidade e acrobática, e para aviões das categorias transporte regional, aplica-se o seguinte:</p> <p>(1) A V_1 deve ser estabelecida em relação à V_{EF} como segue:</p> <p>(i) V_{EF} é a velocidade calibrada na qual é assumida a falha do motor crítico. A V_{EF} deve</p>
---	--

23.149(f).

(ii) The takeoff decision speed, V_1 , is the calibrated airspeed on the ground at which, as a result of engine failure or other reasons, the pilot is assumed to have made a decision to continue or discontinue the takeoff. The takeoff decision speed, V_1 , must be selected by the applicant but must not be less than V_{EF} plus the speed gained with the critical engine inoperative during the time interval between the instant at which the critical engine is failed and the instant at which the pilot recognizes and reacts to the engine failure, as indicated by the pilot's application of the first retarding means during the accelerate-stop determination of paragraph 23.55.

(2) The rotation speed, V_R , in terms of calibrated airspeed, must be selected by the applicant and must not be less than the greatest of the following:

(i) V_1 ;

(ii) $1,05 V_{MC}$ determined under paragraph 23.149(b);

(iii) $1,10 V_{S1}$; or

(iv) The speed that allows attaining the initial climb-out speed, V_2 , before reaching a height of 35 feet (10,67 m) above the takeoff surface in accordance with paragraph 23.57(c)(2).

(3) For any given set of conditions, such as weight, altitude, temperature, and configuration, a single value of V_R must be used to show compliance with both the one-engine-inoperative takeoff and all-engines-operating takeoff requirements.

(4) The takeoff safety speed, V_2 , in terms of calibrated airspeed, must be selected by the applicant so as to allow the gradient of climb required in paragraphs 23.67 (d)(1) and (d)(2) but must not be less than $1,10 V_{MC}$ or less than $1,20 V_{S1}$.

ser selecionada pelo requerente, mas não pode ser inferior a $1,05 V_{MC}$ determinada conforme o parágrafo 23.149(b) ou, por opção do requerente, não inferior a V_{MCG} determinada conforme o parágrafo 23.149(f).

(ii) A velocidade de decisão na decolagem, V_1 , é a velocidade calibrada no solo na qual, devido a falha de motor ou outras razões, é assumido que o piloto tenha tomado a decisão de continuar ou interromper a decolagem. A velocidade de decisão na decolagem, V_1 , deve ser selecionada pelo requerente, mas não pode ser inferior à V_{EF} mais a velocidade ganha com o motor crítico inoperante durante o intervalo de tempo entre o instante em que o motor crítico falha e o instante em que o piloto reconhece e reage à falha do motor, como indicado pela aplicação pelo piloto do primeiro meio de desaceleração durante a determinação da aceleração e parada da seção 23.55.

(2) A velocidade de rotação, V_R , expressa em termos de velocidade calibrada, deve ser escolhida pelo requerente e não pode ser inferior ao maior dos seguintes valores:

(i) V_1 ;

(ii) $1,05 V_{MC}$ determinada conforme o parágrafo 23.149(b);

(iii) $1,10 V_{S1}$; ou

(iv) A velocidade que permita atingir a velocidade inicial de subida, V_2 , antes de atingir uma altura de 35 pés (10,67 m) acima da superfície da decolagem, de acordo com o parágrafo 23.57(c)(2).

(3) Para qualquer conjunto de condições, tais como peso, altitude, temperatura e configuração, um único valor da V_R deve ser utilizado para demonstrar o cumprimento dos requisitos de decolagem, tanto com um motor inoperante como com todos os motores operando.

(4) A velocidade segura de decolagem, V_2 ,

<p>(5) The one-engine-inoperative takeoff distance, using a normal rotation rate at a speed 5 knots (2,6 m/s) less than V_R, established in accordance with paragraph (c)(2) of this section, must be shown not to exceed the corresponding one-engine-inoperative takeoff distance, determined in accordance with section 23.57 and paragraph 23.59(a)(1), using the established V_R. The takeoff, otherwise performed in accordance with section 23.57, must be continued safely from the point at which the airplane is 35 feet (10,67 m) above the takeoff surface and at a speed not less than the established V_2 minus 5 knots (2,6 m/s).</p> <p>(6) The applicant must show, with all engines operating, that marked increases in the scheduled takeoff distances, determined in accordance with paragraph 23.59(a)(2), do not result from over-rotation of the airplane or out-of-trim conditions.</p>	<p>expressa em termos de velocidade calibrada, deve ser selecionada pelo requerente de modo a permitir o gradiente de subida requerido no parágrafo 23.67(d)(1) e (d)(2), mas não pode ser inferior a $1,10 V_{MC}$ ou inferior a $1,20 V_{S1}$.</p> <p>(5) A distância de decolagem com um motor inoperante, usando uma razão de rotação normal, a uma velocidade 5 nós (2,6 m/s) inferior à V_R, estabelecida de acordo com o parágrafo (c)(2) desta seção, deve ser demonstrada não exceder a correspondente distância de decolagem com um motor inoperante, determinada de acordo com seção 23.57 e parágrafo 23.59(a)(1), usando a V_R estabelecida. A decolagem, em outros aspectos realizada de acordo com a seção 23.57, deve ser continuada em segurança a partir do ponto em que o avião está 35 pés (10,67 m) acima da superfície de decolagem e a uma velocidade não inferior à V_2 estabelecida menos 5 nós (2,6 m/s).</p> <p>(6) O requerente deve demonstrar, com todos os motores operando, que rotação excessiva do avião ou condições fora da compensação não resultam em aumentos significativos nas distâncias de decolagem previstas, determinadas de acordo com o parágrafo 23.59(a)(2).</p>
--	---

[Doc. No. 27807, 61 FR 5184, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.53 Takeoff performance.</p> <p>(a) For normal, utility, and acrobatic category airplanes, the takeoff distance must be determined in accordance with paragraph (b) of this section, using speeds determined in accordance with paragraph 23.51 (a) and (b).</p> <p>(b) For normal, utility, and acrobatic category airplanes, the distance required to takeoff and climb to a height of 50 feet (15,24 m) above the takeoff surface must be determined for each weight, altitude, and temperature within the operational limits established for takeoff with:</p>	<p>23.53 Desempenho de decolagem.</p> <p>(a) Para aviões das categorias normal, utilidade e acrobática, a distância de decolagem deve ser determinada de acordo com o parágrafo (b) desta seção, utilizando as velocidades determinadas de acordo com os parágrafos 23.51(a) e (b).</p> <p>(b) Para aviões das categorias normal, utilidade e acrobática, a distância necessária para decolar e subir a uma altura de 50 pés (15,24 m) acima da superfície de decolagem deve ser determinada para cada peso, altitude e temperatura dentro dos limites operacionais</p>
--	--

<p>(1) Takeoff power on each engine;</p> <p>(2) Wing flaps in the takeoff position(s); and</p> <p>(3) Landing gear extended.</p> <p>(c) For normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, takeoff performance, as required by sections 23.55 through 23.59, must be determined with the operating engine(s) within approved operating limitations.</p>	<p>estabelecidos para a decolagem com:</p> <p>(1) Potência de decolagem em cada motor;</p> <p>(2) Flapes das asas na(s) posição(ões) de decolagem; e</p> <p>(3) Trem de pouso estendido.</p> <p>(c) Para aviões multimotores a jato das categorias normal, utilidade e acrobática de mais de 6000 libras (2.722 kg) de peso máximo e para aviões da categoria transporte regional, o desempenho de decolagem, como requerido pelas seções 23.55 a 23.59, deve ser determinado com o(s) motor(es) operantes dentro das limitações operacionais aprovadas.</p>
--	--

[Doc. No. 27807, 61 FR 5185, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.55 Accelerate-stop distance.</p> <p>For normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, the accelerate-stop distance must be determined as follows:</p> <p>(a) The accelerate-stop distance is the sum of the distances necessary to:</p> <p>(1) Accelerate the airplane from a standing start to V_{EF} with all engines operating;</p> <p>(2) Accelerate the airplane from V_{EF} to V_1, assuming the critical engine fails at V_{EF}; and</p> <p>(3) Come to a full stop from the point at which V_1 is reached.</p> <p>(b) Means other than wheel brakes may be used to determine the accelerate-stop distances if that means:</p> <p>(1) Is safe and reliable;</p> <p>(2) Is used so that consistent results can be expected under normal operating conditions;</p>	<p>23.55 Distância de aceleração e parada.</p> <p>Para aviões multimotores a jato das categorias normal, utilidade e acrobática com mais que 6.000 libras (2.722 kg) de peso máximo e aviões da categoria transporte regional, a distância de aceleração e parada deve ser determinada como segue:</p> <p>(a) A distância de aceleração e parada é a soma das distâncias necessárias para:</p> <p>(1) Acelerar o avião da imobilidade até a V_{EF} com todos os motores operando;</p> <p>(2) Acelerar o avião da V_{EF} até a V_1, assumindo que o motor crítico falha na V_{EF}; e</p> <p>(3) Realizar uma parada completa a partir do ponto em que a V_1 é atingida.</p> <p>(b) Outros meios que não os freios de roda podem ser usados para determinar as distâncias de aceleração e parada se este meio:</p> <p>(1) É seguro e confiável;</p> <p>(2) É usado de forma que resultados</p>
---	--

and (3) Is such that exceptional skill is not required to control the airplane.	consistentes podem ser esperados em condições normais de operação; e (3) É tal que habilidade excepcional não é requerida para controlar o avião.
--	--

[Amdt. 23-34, 52 FR 1826, Jan. 15, 1987, as amended by Amdt. 23-50, 61 FR 5185, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.57 Takeoff path.</p> <p>For normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, the takeoff path is as follows:</p> <p>(a) The takeoff path extends from a standing start to a point in the takeoff at which the airplane is 1.500 feet (457,20 m) above the takeoff surface at or below which height the transition from the takeoff to the enroute configuration must be completed; and</p> <p>(1) The takeoff path must be based on the procedures prescribed in section 23.45;</p> <p>(2) The airplane must be accelerated on the ground to V_{EF} at which point the critical engine must be made inoperative and remain inoperative for the rest of the takeoff; and</p> <p>(3) After reaching V_{EF}, the airplane must be accelerated to V_2.</p> <p>(b) During the acceleration to speed V_2, the nose gear may be raised off the ground at a speed not less than V_R. However, landing gear retraction must not be initiated until the airplane is airborne.</p> <p>(c) During the takeoff path determination, in accordance with paragraphs (a) and (b) of this section:</p> <p>(1) The slope of the airborne part of the takeoff path must not be negative at any point;</p> <p>(2) The airplane must reach V_2 before it is 35</p>	<p>23.57 Trajetória de decolagem.</p> <p>Para aviões a jato multimotores com peso máximo superior a 6.000 libras (2.722 kg) das categorias normal, utilidade e acrobática, e para aviões da categoria transporte regional, a trajetória de decolagem é definida como segue:</p> <p>(a) A trajetória de decolagem se estende desde a imobilidade até o ponto da decolagem no qual o avião está a 1.500 pés (457,20 m) acima da superfície de decolagem, no qual ou abaixo do qual a transição da configuração de decolagem para a de cruzeiro deve ser completada; e</p> <p>(1) A trajetória de decolagem deve ser baseada nos procedimentos prescritos na seção 23.45;</p> <p>(2) O avião deve ser acelerado no solo até a V_{EF}, ponto no qual o motor crítico deve ser feito inoperante e permanecer inoperante pelo resto da decolagem; e</p> <p>(3) Depois de atingir a V_{EF}, o avião deve ser acelerado para a V_2.</p> <p>(b) Durante a aceleração até a velocidade V_2, o trem de pouso do nariz pode ser tirado do solo a uma velocidade não inferior à V_R. Contudo, a retração do trem de pouso não pode ser iniciada até que o avião esteja no ar.</p> <p>(c) Durante a determinação da trajetória de decolagem, de acordo com os parágrafos (a) e (b) desta seção:</p> <p>(1) A inclinação da parte aérea da trajetória de decolagem não pode ser negativa em nenhum</p>
--	---

<p>feet (10,67 m) above the takeoff surface, and must continue at a speed as close as practical to, but not less than V_2, until it is 400 feet (121,92 m) above the takeoff surface;</p> <p>(3) At each point along the takeoff path, starting at the point at which the airplane reaches 400 feet (121,92 m) above the takeoff surface, the available gradient of climb must not be less than:</p> <p>(i) 1,2 percent for two-engine airplanes;</p> <p>(ii) 1,5 percent for three-engine airplanes;</p> <p>(iii) 1,7 percent for four-engine airplanes; and</p> <p>(4) Except for gear retraction and automatic propeller feathering, the airplane configuration must not be changed, and no change in power that requires action by the pilot may be made, until the airplane is 400 feet (121,92 m) above the takeoff surface.</p> <p>(d) The takeoff path to 35 feet (10,67 m) above the takeoff surface must be determined by a continuous demonstrated takeoff.</p> <p>(e) The takeoff path to 35 feet (10,67 m) above the takeoff surface must be determined by synthesis from segments; and</p> <p>(1) The segments must be clearly defined and must be related to distinct changes in configuration, power, and speed;</p> <p>(2) The weight of the airplane, the configuration, and the power must be assumed constant throughout each segment and must correspond to the most critical condition prevailing in the segment; and</p> <p>(3) The takeoff flight path must be based on the airplane's performance without utilizing ground effect.</p>	<p>ponto;</p> <p>(2) O avião deve atingir a V_2 antes de alcançar 35 pés (10,67 m) acima da superfície de decolagem e deve continuar em uma velocidade tão próxima quanto possível, mas não inferior a V_2, até que ele esteja 400 pés (121,92 m) acima da superfície de decolagem;</p> <p>(3) Em cada ponto ao longo da trajetória de decolagem, iniciando no ponto em que o avião atinge 400 pés (121,92 m) acima da superfície da decolagem, o gradiente de subida disponível não pode ser menor que:</p> <p>(i) 1,2 por cento para aviões bimotores;</p> <p>(ii) 1,5 por cento para aviões trimotores, e</p> <p>(iii) 1,7 por cento para aviões quadrimotores; e</p> <p>(4) A configuração do avião não pode ser alterada, exceto pela retração do trem de pouso e embandeiramento automático de hélice, e nenhuma mudança na potência que requeira ação do piloto deve ser feita até que o avião esteja 400 pés (121,92 m) acima da superfície de decolagem.</p> <p>(d) A trajetória de decolagem até 35 pés (10,67 m) acima da superfície de decolagem deve ser determinada através da demonstração de uma decolagem contínua.</p> <p>(e) A trajetória de decolagem a partir de 35 pés (10,67 m) acima da superfície de decolagem deve ser determinada pela síntese de segmentos; e</p> <p>(1) Os segmentos devem ser claramente definidos e devem estar relacionados a nítidas alterações na configuração, potência e velocidade;</p> <p>(2) O peso do avião, a configuração e a potência devem ser assumidos constantes ao longo de cada segmento e devem corresponder à condição mais crítica predominante no</p>
--	--

	<p>segmento; e</p> <p>(3) A trajetória em voo da decolagem deve ser baseada no desempenho do avião sem utilizar o efeito de solo.</p>
--	---

[Amdt. 23-34, 52 FR 1827, Jan. 15, 1987, as amended by Amdt. 23-50, 61 FR 5185, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.59 Takeoff distance and takeoff run.</p> <p>For normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, the takeoff distance and, at the option of the applicant, the takeoff run, must be determined.</p> <p>(a) Takeoff distance is the greater of:</p> <p>(1) The horizontal distance along the takeoff path from the start of the takeoff to the point at which the airplane is 35 feet (10,67 m) above the takeoff surface as determined under section 23.57; or</p> <p>(2) With all engines operating, 115 percent of the horizontal distance from the start of the takeoff to the point at which the airplane is 35 feet (10,67 m) above the takeoff surface, determined by a procedure consistent with section 23.57.</p> <p>(b) If the takeoff distance includes a clearway, the takeoff run is the greater of:</p> <p>(1) The horizontal distance along the takeoff path from the start of the takeoff to a point equidistant between the liftoff point and the point at which the airplane is 35 feet (10,67 m) above the takeoff surface as determined under section 23.57; or</p> <p>(2) With all engines operating, 115 percent of the horizontal distance from the start of the takeoff to a point equidistant between the liftoff point and the point at which the airplane is 35 feet (10,67 m) above the takeoff surface, determined by a procedure consistent with</p>	<p>23.59 Distância de decolagem e corrida de decolagem.</p> <p>Para aviões multimotores a jato de categoria normal, utilidade e acrobática de mais de 6000 libras (2.722 kg) de peso máximo e para aviões da categoria transporte regional, a distância de decolagem e, por opção do requerente, a corrida de decolagem, deve ser determinada.</p> <p>(a) A distância de decolagem é a maior entre:</p> <p>(1) A distância horizontal ao longo da trajetória de decolagem a partir do início da decolagem até o ponto em que o avião está 35 pés (10,67 m) acima da superfície de decolagem como determinado pela seção 23.57; ou</p> <p>(2) Com todos os motores operando, 115 por cento da distância horizontal do início da decolagem até o ponto em que o avião está 35 pés (10,67 m) acima da superfície de decolagem, determinada por um procedimento consistente com a seção 23.57.</p> <p>(b) Se a distância de decolagem incluir uma “clearway”, a corrida de decolagem é a maior entre:</p> <p>(1) A distância horizontal ao longo da trajetória de decolagem a partir do início da decolagem até um ponto equidistante entre o ponto em que o avião deixa o solo e o ponto em que o avião está 35 pés (10,67 m) acima da superfície de decolagem, como determinada pela seção 23.57; ou</p> <p>(2) Com todos os motores operando, 115 por cento da distância horizontal do início da decolagem até um ponto equidistante entre o</p>
--	--

section 23.57.	ponto em que o avião deixa o solo e o ponto em que o avião está 35 pés (10,67 m) acima da superfície de decolagem, determinada por um procedimento consistente com a seção 23.57.
----------------	---

[Amdt. 23-34, 52 FR 1827, Jan. 15, 1987, as amended by Amdt. 23-50, 61 FR 5185, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.61 Takeoff flight path.</p> <p>For normal, utility, and acrobatic category multiengine jets of more than 6,000 pounds maximum weight and commuter category airplanes, the takeoff flight path must be determined as follows:</p> <p>(a) The takeoff flight path begins 35 feet (10,67 m) above the takeoff surface at the end of the takeoff distance determined in accordance with section 23.59.</p> <p>(b) The net takeoff flight path data must be determined so that they represent the actual takeoff flight paths, as determined in accordance with section 23.57 and with paragraph (a) of this section, reduced at each point by a gradient of climb equal to:</p> <p>(1) 0,8 percent for two-engine airplanes;</p> <p>(2) 0,9 percent for three-engine airplanes; and</p> <p>(3) 1,0 percent for four-engine airplanes.</p> <p>(c) The prescribed reduction in climb gradient may be applied as an equivalent reduction in acceleration along that part of the takeoff flight path at which the airplane is accelerated in level flight.</p>	<p>23.61 Trajetória em voo da decolagem.</p> <p>Para aviões multimotores à jato da categoria normal, utilidade e acrobática com mais que 6.000 libras (2.722 kg) de peso máximo e aviões da categoria transporte regional, a trajetória em voo da decolagem deve ser determinada como segue:</p> <p>(a) A trajetória em voo da decolagem começa a 35 pés (10,67 m) acima da superfície de decolagem ao final da distância de decolagem, determinada de acordo com a seção 23.59.</p> <p>(b) Os dados da trajetória em voo líquida da decolagem devem ser determinados de modo que eles representem a real trajetória em voo da decolagem, determinada conforme a seção 23.57 e com o parágrafo (a) desta seção, reduzidas em cada ponto por um gradiente de subida igual a:</p> <p>(1) 0,8 por cento para aviões bimotores;</p> <p>(2) 0,9 por cento para aviões trimotores; e</p> <p>(3) 1,0 por cento para aviões quadrimotores.</p> <p>(c) A redução prescrita no gradiente de subida deve ser aplicada como uma redução equivalente na aceleração ao longo da parte da trajetória em voo da decolagem na qual o avião é acelerado em voo nivelado.</p>
---	---

[Amdt. 23-34, 52 FR 1827, Jan. 15, 1987, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.63 Climb: General.</p> <p>(a) Compliance with the requirements of sections 23.65, 23.66, 23.67, 23.69, and 23.77</p>	<p>23.63 Subida: Geral.</p> <p>(a) O cumprimento com os requisitos das seções 23.65, 23.66, 23.67, 23.69 e 23.77</p>
---	---

<p>must be shown:</p> <p>(1) Out of ground effect; and</p> <p>(2) At speeds that are not less than those at which compliance with the powerplant cooling requirements of sections 23.1041 to 23.1047 has been demonstrated; and</p> <p>(3) Unless otherwise specified, with one engine inoperative, at a bank angle not exceeding 5 degrees.</p> <p>(b) For normal, utility, and acrobatic category reciprocating engine-powered airplanes of 6.000 pounds (2.722 kg) or less maximum weight, compliance must be shown with paragraphs 23.65(a), 23.67(a), where appropriate, and paragraph 23.77(a) at maximum takeoff or landing weight, as appropriate, in a standard atmosphere.</p> <p>(c) For each of the following normal, utility, and acrobatic category airplanes: (1) reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight, (2) single engine turbines, and (3) multiengine turbine airplanes of 6.000 pounds (2.722 kg) or less maximum weight, compliance must be shown at weights as a function of airport altitude and ambient temperature within the operational limits established for takeoff and landing, respectively, with:</p> <p>(1) For reciprocating engine-power airplanes of more than 6.000 pounds (2.722 kg) maximum weight:</p> <p>(i) Paragraphs 23.65(b) and 23.67(b)(1) and (2), where appropriate, for takeoff and</p> <p>(ii) Paragraphs 23.67(b)(2), where appropriate, and 23.77(b), for landing,</p> <p>(2) For single-engine turbines:</p> <p>(i) Paragraph 23.65(b), for takeoff, and</p>	<p>devem ser demonstrados:</p> <p>(1) Fora do efeito de solo; e</p> <p>(2) Em velocidades que não sejam menores do que aquelas nas quais o cumprimento com os requisitos de refrigeração do grupo motopropulsor das seções 23.1041 a 23.1047 tenha sido demonstrado; e</p> <p>(3) A menos que especificado de outra maneira, com um motor inoperante, em um ângulo de inclinação lateral não superior a 5 graus.</p> <p>(b) Para aviões das categorias normal, utilidade e acrobática, propelidos por motores convencionais, e com até 6.000 libras (2.722 kg) de peso máximo, deve ser demonstrado o cumprimento com os parágrafos 23.65(a), 23.67(a), onde for apropriado, e parágrafo 23.77(a) no peso máximo de decolagem ou pouso, o que for apropriado, em uma atmosfera padrão.</p> <p>(c) Para todos os seguintes aviões das categorias normal, utilidade e acrobática: (1) aviões propelidos por motores convencionais e com peso máximo superior a 6.000 libras (2.722 kg), (2) aviões monomotor à turbina, e (3) aviões multimotores à turbina de peso máximo igual ou inferior a 6.000 libras (2.722 kg), o cumprimento deve ser demonstrado com pesos como uma função da altitude do aeródromo e temperatura ambiente, dentro dos limites operacionais estabelecidos para decolagem e pouso, respectivamente, com:</p> <p>(1) Para aviões propelidos por motores convencionais e com peso máximo superior a 6.000 libras (2.722 kg):</p> <p>(i) Parágrafos 23.65(b) e 23.67(b)(1) e (2), onde apropriado, para a decolagem, e</p> <p>(ii) parágrafo 23.67(b)(2), onde apropriado, e 23.77(b), para o pouso,</p>
---	--

<p>(ii) Paragraph 23.77(b) for landing.</p> <p>(3) For multiengine turbine airplanes of 6.000 pounds (2.722 kg) or less maximum weight:</p> <p>(i) For takeoff, 23.65(b) and</p> <p>(A) If a turbopropeller-power airplane, 23.67(b)(1), and (2), where appropriate.</p> <p>(B) If a jet airplane, 23.67(c)(1), and (2), where appropriate.</p> <p>(ii) For landing, 23.77(b) and</p> <p>(A) If a turbopropeller-powered airplane, 23.67(b)(2), where appropriate.</p> <p>(B) If a jet airplane, 23.67(c)(2), where appropriate.</p> <p>(d) For multiengine turbine airplanes over 6.000 pounds (2.722 kg) maximum weight in the normal, utility, and acrobatic category and commuter category airplanes, compliance must be shown at weights as a function of airport altitude and ambient temperature within the operational limits established for takeoff and landing, respectively, with:</p> <p>(1) If a normal, utility, or acrobatic category, turbopropeller-powered airplane:</p> <p>(i) Paragraphs 23.67(b)(1), and (2), where appropriate, for takeoff, and</p> <p>(ii) Paragraph 23.67(b)(2), where appropriate, and 23.77(c), for landing</p> <p>(2) If a jet or commuter category airplane:</p> <p>(i) Paragraphs 23.67(d)(1), (2), and (3), where appropriate, for takeoff, and</p> <p>(ii) Paragraphs 23.67(d)(3), and (4), where appropriate, and 23.77(c) for landing.</p>	<p>(2) Para aviões monomotor à turbina:</p> <p>(i) Parágrafo 23.65(b), para a decolagem, e</p> <p>(ii) Parágrafo 23.77(b), para o pouso,</p> <p>(3) Para aviões multimotores à turbinas de peso máximo igual ou inferior a 6.000 libras (2.722 kg):</p> <p>(i) Para a decolagem, 23.65(b), e</p> <p>(A) Se um avião turboélice, 23.67(b)(1) e (2), onde apropriado.</p> <p>(B) Se um avião a jato, 23.67(c)(1) e (2), onde apropriado.</p> <p>(ii) Para o pouso, 23.77(b) e</p> <p>(A) Se um avião turboélice, 23.67(b)(2), onde apropriado.</p> <p>(B) Se um avião a jato, 23.67(c)(2), onde apropriado.</p> <p>(d) Para aviões multimotores à turbina com peso máximo superior a 6.000 libras (2.722 kg) das categorias normal, utilidade e acrobática, e para aviões da categoria transporte regional, o cumprimento deve ser demonstrado com pesos como uma função da altitude do aeródromo e temperatura ambiente dentro dos limites operacionais estabelecidos para decolagem e pouso, respectivamente, com:</p> <p>(1) Se um avião turboélice das categorias normal, utilidade ou acrobática:</p> <p>(i) Parágrafos 23.67(b)(1) e (2), onde apropriado, para a decolagem, e</p> <p>(ii) Parágrafos 23.67(b)(2), onde apropriado, e 23.77(c), para o pouso.</p> <p>(2) Se um avião a jato ou um avião da categoria transporte regional:</p> <p>(i) Parágrafos 23.67(d)(1), (2) e (3), onde</p>
---	--

	<p>apropriado, para a decolagem, e</p> <p>(ii) Parágrafos 23.67(d)(3) e (4), onde apropriado, e 23.77(c), para o pouso.</p>
--	---

[Doc. No. 27807, 61 FR 5186, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

<p>23.65 Climb: All engines operating.</p> <p>(a) Each normal, utility, and acrobatic category reciprocating engine-powered airplane of 6.000 pounds (2.722 kg) or less maximum weight must have a steady climb gradient at sea level of at least 8.3 percent for landplanes or 6.7 percent for seaplanes and amphibians with:</p> <p>(1) Not more than maximum continuous power on each engine;</p> <p>(2) The landing gear retracted;</p> <p>(3) The wing flaps in the takeoff position(s); and</p> <p>(4) A climb speed not less than the greater of 1.1 V_{MC} and 1.2 V_{S1} for multiengine airplanes and not less than 1.2 V_{S1} for single-engine airplanes.</p> <p>(b) Each normal, utility, and acrobatic category reciprocating engine-powered airplane of more than 6.000 pounds (2.722 kg) maximum weight, single-engine turbine, and multiengine turbine airplanes of 6.000 pounds (2.722 kg) or less maximum in the normal, utility, and acrobatic category must have a steady gradient of climb after takeoff of at least 4 percent with:</p> <p>(1) Take off power on each engine;</p> <p>(2) The landing gear extended, except that if the landing gear can be retracted in not more than seven seconds, the test may be conducted with the gear retracted;</p> <p>(3) The wing flaps in the takeoff position(s); and</p>	<p>23.65 Subida: Todos os motores operando.</p> <p>(a) Todo avião da categoria normal, utilidade e acrobática, propelido por motor convencional e com 6.000 libras (2.722 kg) ou menos de peso máximo deve ter um gradiente de subida estabilizado ao nível do mar de pelo menos 8,3 por cento para aviões terrestres e 6,7 por cento para hidroaviões e aviões anfíbios com:</p> <p>(1) Não mais do que a potência máxima contínua em cada motor;</p> <p>(2) O trem de pouso recolhido;</p> <p>(3) Os flapes das asas na(s) posição(ões) de decolagem; e</p> <p>(4) Uma velocidade de subida não inferior ao maior entre 1,1 V_{MC} e 1,2 V_{S1} para aviões multimotores, e não inferior a 1,2 V_{S1} para aviões monomotores.</p> <p>(b) Todo avião da categoria normal, utilidade e acrobática, propelido por motor convencional e mais que 6.000 libras (2.722 kg) de peso máximo, avião monomotor a turbina e avião multimotor a turbina de 6000 libras (2722 Kg) ou menos de peso máximo das categorias normal, utilidade e acrobática deve ter um gradiente de subida estabilizado após a decolagem de pelo menos 4 por cento com:</p> <p>(1) Potência de decolagem em cada motor;</p> <p>(2) O trem de pouso estendido, exceto que se o trem de pouso pode ser recolhido em no máximo sete segundos, o ensaio pode ser realizado com o trem de pouso recolhido;</p> <p>(3) Os flapes das asas na(s) posição(ões) de</p>
--	--

(4) A climb speed as specified in paragraph 23.65(a)(4).	decolagem; e (4) Uma velocidade de subida como especificado no parágrafo 23.65(a)(4).
--	--

[Doc. No. 27807, 61 FR 5186, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75753, Dec. 2, 2011]

§ 23.66 Takeoff climb: One-engine inoperative.

For normal, utility, and acrobatic category reciprocating engine-powered airplanes of more than 6,000 pounds maximum weight, and turbine engine-powered airplanes in the normal, utility, and acrobatic category, the steady gradient of climb or descent must be determined at each weight, altitude, and ambient temperature within the operational limits established by the applicant with—

- (a) The critical engine inoperative and its propeller in the position it rapidly and automatically assumes;
- (b) The remaining engine(s) at takeoff power;
- (c) The landing gear extended, except that if the landing gear can be retracted in not more than seven seconds, the test may be conducted with the gear retracted;
- (d) The wing flaps in the takeoff position(s);
- (e) The wings level; and
- (f) A climb speed equal to that achieved at 50 feet in the demonstration of §23.53.

[Doc. No. 27807, 61 FR 5186, Feb. 9, 1996]

<p>23.67 Climb: One engine inoperative.</p> <p>(a) For normal, utility, and acrobatic category reciprocating multiengine-powered airplanes of 6,000 pounds (2.722 kg) or less maximum weight, the following apply:</p> <p>(1) Except for those airplanes that meet the requirements prescribed in paragraph 23.562(d), each airplane with a V_{SO} of more than 61 knots (31,4 m/s) must be able to maintain a steady climb gradient of at least 1,5 percent at a pressure altitude of 5.000 feet (1.524 m) with the:</p> <p>(i) Critical engine inoperative and its propeller in the minimum drag position;</p>	<p>23.67 Subida: Um motor inoperante.</p> <p>(a) Para aviões multimotores propelidos por motores convencionais da categoria normal, utilidade e acrobática, e de 6.000 libras (2.722 kg) ou menos de peso máximo, aplica-se o seguinte:</p> <p>(1) Exceto para aqueles aviões que cumprem os requisitos prescritos no parágrafo 23.562(d), todo avião com uma V_{SO} maior que 61 nós (31,4 m/s) deve ser capaz de manter um gradiente de subida estabilizado de pelo menos 1,5 por cento, a uma altitude-pressão de 5.000 pés (1.524 m) com:</p> <p>(i) Motor crítico inoperante e sua hélice na</p>
--	---

<p>(ii) Remaining engine(s) at not more than maximum continuous power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps retracted; and</p> <p>(v) Climb speed not less than 1,2 V_{S1}.</p> <p>(2) For each airplane that meets the requirements prescribed in paragraph 23.562(d), or that has a V_{S0} of 61 knots or less, the steady gradient of climb or descent at a pressure altitude of 5,000 feet (1.524 m) must be determined with the:</p> <p>(i) Critical engine inoperative and its propeller in the minimum drag position;</p> <p>(ii) Remaining engine(s) at not more than maximum continuous power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps retracted; and</p> <p>(v) Climb speed not less than 1.2 V_{S1}.</p> <p>(b) For normal, utility, and acrobatic category reciprocating multiengine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight, and multiengine turbopropeller-powered airplanes in the normal, utility, and acrobatic category:</p> <p>(1) The steady gradient of climb at an altitude of 400 feet above the takeoff must be no less than 1 percent with:</p> <p>(i) The critical engine inoperative and its propeller in the minimum drag position;</p> <p>(ii) Remaining engine(s) at takeoff power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps in the takeoff position(s); and</p> <p>(v) Climb speed equal to that achieved at 50</p>	<p>posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) com não mais que a potência máxima contínua;</p> <p>(iii) Trem de pouso recolhido;</p> <p>(iv) Flapes das asas recolhidos; e</p> <p>(v) Velocidade de subida não inferior a 1,2 V_{S1}.</p> <p>(2) Para todo avião que cumpre os requisitos prescritos no parágrafo 23.562(d), ou que tenha uma V_{S0} de 61 nós ou menos, o gradiente de subida ou descida estabilizado a uma altitude-pressão de 5.000 pés (1.524 m) deve ser determinado com:</p> <p>(i) Motor crítico inoperante e sua hélice na posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) com não mais que a potência máxima contínua;</p> <p>(iii) Trem de pouso recolhido;</p> <p>(iv) Flapes das asas recolhidos; e</p> <p>(v) Velocidade de subida não inferior a 1,2 V_{S1}.</p> <p>(b) Para aviões multimotores propelidos por motores convencionais das categorias normal, utilidade e acrobática, com mais que 6.000 libras (2.722 kg) de peso máximo, e aviões multimotores turboélices, das categorias normal, utilidade e acrobática:</p> <p>(1) O gradiente de subida estabilizado a uma altitude de 400 pés (121,9 m) acima da decolagem deve ser não menor que 1 por cento com:</p> <p>(i) O motor crítico inoperante e sua hélice na posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) na potência de decolagem;</p>
---	--

<p>feet in the demonstration of section 23.53.</p> <p>(2) The steady gradient of climb must not be less than 0,75 percent at an altitude of 1.500 feet (457,2 m) above the takeoff surface, or landing surface, as appropriate, with the:</p> <p>(i) Critical engine inoperative and its propeller in the minimum drag position;</p> <p>(ii) Remaining engine(s) at not more than maximum continuous power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps retracted; and</p> <p>(v) Climb speed not less than 1.2 V_{S1}.</p> <p>(c) For normal, utility, and acrobatic category multiengine jets of 6.000 pounds (2.722 kg) or less maximum weight:</p> <p>(1) The steady gradient of climb at an altitude of 400 feet (121,9 m) above the takeoff must be no less than 1,2 percent with the:</p> <p>(i) Critical engine inoperative;</p> <p>(ii) Remaining engine(s) at takeoff power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps in the takeoff position(s); and</p> <p>(v) Climb speed equal to that achieved at 50 feet (15,24 m) in the demonstration of section 23.53.</p> <p>(2) The steady gradient of climb may not be less than 0,75 percent at an altitude of 1.500 feet (457,2 m) above the takeoff surface, or landing surface, as appropriate, with the:</p> <p>(i) Critical engine inoperative;</p> <p>(ii) Remaining engine(s) at not more than maximum continuous power;</p>	<p>(iii) Trem de pouso recolhido;</p> <p>(iv) Flapes das asas na(s) posição(ões) de decolagem; e</p> <p>(v) Velocidade de subida igual àquela atingida a 50 pés (15,24 m) na demonstração do parágrafo 23.53.</p> <p>(2) O gradiente de subida estabilizado não pode ser inferior a 0,75 por cento a uma altitude de 1.500 pés (457,2 m) acima da superfície de decolagem, ou superfície de pouso, conforme o caso, com:</p> <p>(i) Motor crítico inoperante e sua hélice na posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) com não mais que a potência máxima contínua;</p> <p>(iii) Trem de pouso recolhido;</p> <p>(iv) Flapes das asas recolhidos; e</p> <p>(v) Velocidade de subida não inferior a 1,2 $VS1$.</p> <p>(c) Para aviões multimotores a jato da categoria normal, utilidade e acrobática de 6.000 libras (2.722 kg) ou menos de peso máximo:</p> <p>(1) O gradiente de subida estabilizado a uma altitude de 400 pés (121,9 m) acima da decolagem deve ser não menor que 1,2 por cento com:</p> <p>(i) O motor crítico inoperante;</p> <p>(ii) motor(es) remanescente(s) na potência de decolagem;</p> <p>(iii) O trem de pouso recolhido;</p> <p>(iv) Os flapes das asas na(s) posição(ões) de decolagem; e</p> <p>(v) A velocidade de subida igual à aquela atingida a 50 ft (15,24 m) na demonstração</p>
--	---

<p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps retracted; and</p> <p>(v) Climb speed not less than $1.2 V_{S1}$.</p> <p>(d) For multiengine jets over 6.000 pounds (2.722 kg) maximum weight in the normal, utility and acrobatic category and commuter category airplanes, the following apply:</p> <p>(1) Takeoff; landing gear extended. The steady gradient of climb at the altitude of the takeoff surface must be measurably positive for two-engine airplanes, not less than 0,3 percent for three-engine airplanes, or 0,5 percent for four-engine airplanes with:</p> <p>(i) The critical engine inoperative and its propeller, if applicable, in the position it rapidly and automatically assumes;</p> <p>(ii) The remaining engine(s) at takeoff power;</p> <p>(iii) The landing gear extended, and all landing gear doors open;</p> <p>(iv) The wing flaps in the takeoff position(s);</p> <p>(v) The wings level; and</p> <p>(vi) A climb speed equal to V_2.</p> <p>(2) Takeoff; landing gear retracted. The steady gradient of climb at an altitude of 400 feet (121,92 m) above the takeoff surface must be not less than 2,0 percent of two-engine airplanes, 2,3 percent for three-engine airplanes, and 2,6 percent for four-engine airplanes with:</p> <p>(i) The critical engine inoperative and its propeller, if applicable, in the position it rapidly and automatically assumes;</p> <p>(ii) The remaining engine(s) at takeoff power;</p> <p>(iii) The landing gear retracted;</p>	<p>seção 23.53.</p> <p>(2) O gradiente de subida estabilizado não pode ser menor que 0,75 por cento a uma altitude de 1500 pés (457,2 m) acima da superfície de decolagem, ou da superfície de pouso, conforme apropriado, com:</p> <p>(i) O motor crítico inoperante;</p> <p>(ii) motor(es) remanescente(s) em não mais que potência máxima contínua;</p> <p>(iii) O trem de pouso recolhido;</p> <p>(iv) Os flapes das asas recolhidos;</p> <p>(v) Velocidade de subida não menor que $1.2 V_{S1}$.</p> <p>(d) Para aviões multimotores a jato de peso máximo maior que 6000 libras (2.722 kg) das categorias normal, utilidade e acrobática e para aviões na categoria transporte regional, aplica-se o seguinte:</p> <p>(1) Decolagem, trem de pouso estendido. O gradiente de subida estabilizado, na altitude da superfície de decolagem deve ser mensuravelmente positivo para aviões bimotores, não inferior a 0,3 por cento para aviões trimotores, ou 0,5 por cento para aviões quadrimotores com:</p> <p>(i) O motor crítico inoperante e sua hélice, se aplicável, na posição que esta assume automática e rapidamente;</p> <p>(ii) O(s) motor(es) remanescente(s) na potência de decolagem;</p> <p>(iii) O trem de pouso estendido, e todas as portas do trem de pouso abertas;</p> <p>(iv) Os flapes das asas na(s) posição(ões) de decolagem;</p> <p>(v) As asas niveladas; e</p>
--	---

<p>(iv) The wing flaps in the takeoff position(s);</p> <p>(v) A climb speed equal to V_2.</p> <p>(3) Enroute. The steady gradient of climb at an altitude of 1.500 feet (457,2 m) above the takeoff or landing surface, as appropriate, must be not less than 1,2 percent for two-engine airplanes, 1,5 percent for three-engine airplanes, and 1,7 percent for four-engine airplanes with:</p> <p>(i) The critical engine inoperative and its propeller, if applicable, in the minimum drag position;</p> <p>(ii) The remaining engine(s) at not more than maximum continuous power;</p> <p>(iii) The landing gear retracted;</p> <p>(iv) The wing flaps retracted; and</p> <p>(v) A climb speed not less than $1.2 V_{S1}$.</p> <p>(4) Discontinued approach. The steady gradient of climb at an altitude of 400 feet (121,9 m) above the landing surface must be not less than 2,1 percent for two-engine airplanes, 2,4 percent for three-engine airplanes, and 2,7 percent for four-engine airplanes, with:</p> <p>(i) The critical engine inoperative and its propeller, if applicable, in the minimum drag position;</p> <p>(ii) The remaining engine(s) at takeoff power;</p> <p>(iii) Landing gear retracted;</p> <p>(iv) Wing flaps in the approach position(s) in which V_{S1} for these position(s) does not exceed 110 percent of the V_{S1} for the related all-engines-operated landing position(s); and</p> <p>(v) A climb speed established in connection with normal landing procedures but not exceeding $1.5 V_{S1}$.</p>	<p>(vi) Uma velocidade de subida igual à V_2.</p> <p>(2) Decolagem, trem de pouso recolhido. O gradiente de subida estabilizado a uma altitude de 400 pés (121,92 m) acima da superfície de decolagem não pode ser inferior a 2,0 por cento para aviões bimotores, 2,3 por cento para aviões trimotores, e 2,6 por cento para aviões quadrimotores com:</p> <p>(i) O motor crítico inoperante e sua hélice, se aplicável, na posição que esta assume automática e rapidamente;</p> <p>(ii) O(s) motor(es) remanescente(s) na potência de decolagem;</p> <p>(iii) O trem de pouso recolhido;</p> <p>(iv) Os flapes das asas na(s) posição(ões) de decolagem;</p> <p>(v) Uma velocidade de subida igual a V_2.</p> <p>(3) Cruzeiro. O gradiente de subida estabilizado a uma altitude de 1500 pés (457,2 m) acima da superfície de decolagem ou pouso, conforme o caso, não pode ser inferior a 1,2 por cento para aviões bimotores, 1,5 por cento para aviões trimotores, e 1,7 por cento para aviões quadrimotores com:</p> <p>(i) O motor crítico inoperante e sua hélice, se aplicável, na posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) em não mais que a potência máxima contínua;</p> <p>(iii) O trem de pouso recolhido;</p> <p>(iv) Os flapes das asas recolhidos; e</p> <p>(v) Uma velocidade de subida não inferior à $1,2 V_{S1}$.</p> <p>(4) Arremetida. O gradiente de subida estabilizado a uma altitude de 400 pés (121,9 m) acima da superfície de pouso não pode ser inferior a 2,1 por cento para aviões bimotores,</p>
--	---

	<p>2,4 por cento para aviões trimotores, e 2,7 por cento para aviões quadrimotores com:</p> <p>(i) O motor crítico inoperante e sua hélice, se aplicável, na posição de arrasto mínimo;</p> <p>(ii) O(s) motor(es) remanescente(s) na potência de decolagem;</p> <p>(iii) O trem de pouso recolhido;</p> <p>(iv) Os flapes das asas na(s) posição(ões) de aproximação nas quais a V_{S1} para esta(s) posição(ões) não excede 110 por cento da V_{S1} para a(s) correspondente(s) posição(ões) de pouso com todos os motores operando; e</p> <p>(v) Uma velocidade de subida estabelecida em conexão com os procedimentos normais de pouso, mas não excedendo a $1,5 V_{S1}$.</p>
--	--

[Doc. No. 27807, 61 FR 5186, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75754, Dec. 2, 2011]

§ 23.69 Enroute climb/descent.

(a) All engines operating. The steady gradient and rate of climb must be determined at each weight, altitude, and ambient temperature within the operational limits established by the applicant with—

- (1) Not more than maximum continuous power on each engine;
- (2) The landing gear retracted;
- (3) The wing flaps retracted; and
- (4) A climb speed not less than $1.3 V_{S1}$.

(b) One engine inoperative. The steady gradient and rate of climb/descent must be determined at each weight, altitude, and ambient temperature within the operational limits established by the applicant with—

- (1) The critical engine inoperative and its propeller in the minimum drag position;
- (2) The remaining engine(s) at not more than maximum continuous power;
- (3) The landing gear retracted;
- (4) The wing flaps retracted; and

(5) A climb speed not less than $1.2 V_{S1}$.

[Doc. No. 27807, 61 FR 5187, Feb. 9, 1996]

§ 23.71 Glide: Single-engine airplanes.

The maximum horizontal distance traveled in still air, in nautical miles, per 1,000 feet of altitude lost in a glide, and the speed necessary to achieve this must be determined with the engine inoperative, its propeller in the minimum drag position, and landing gear and wing flaps in the most favorable available position.

[Doc. No. 27807, 61 FR 5187, Feb. 9, 1996]

23.73 Reference landing approach speed.	23.73 Velocidade de referência do pouso.
<p>(a) For normal, utility, and acrobatic category reciprocating engine-powered airplanes of 6.000 pounds (2.722 kg) or less maximum weight, the reference landing approach speed, V_{REF}, may not be less than the greater of V_{MC}, determined in 23.149(b) with the wing flaps in the most extended takeoff position, and $1,3 V_{S1}$.</p> <p>(b) Each of the following normal, utility, and acrobatic category airplanes: (1) reciprocating engine-powered airplane of more than 6.000 pounds (2.722 kg) maximum weight, (2) turbine powered airplane of 6.000 pounds (2.722 kg) or less maximum weight, and (3) single engine turbine powered airplane of more than 6.000 pounds (2.722 kg) maximum weight, the reference landing approach speed, V_{REF}, may not be less than the greater of V_{MC}, determined in 23.149(c), and $1,3 V_{S1}$.</p> <p>(c) For normal, utility, and acrobatic category multiengine turbine powered airplanes over 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, the reference landing approach speed, V_{REF}, may not be less than the greater of $1,05 V_{MC}$, determined in 23.149(c), and $1,3 V_{S1}$.</p>	<p>(a) Para aviões das categorias normal, utilidade e acrobática, propelidos por motor convencional e de 6.000 libras (2.722 kg) ou menos do peso máximo, a velocidade de referência do pouso, V_{REF}, não pode ser inferior ao maior entre a V_{MC}, determinada no parágrafo 23.149(b) com os flapes das asas na mais estendida posição de decolagem, e $1,3 V_{S1}$.</p> <p>(b) Para todos os seguintes aviões das categorias normal, utilidade e acrobática: (1) avião propelido por motor convencional com mais que 6.000 libras (2.722 kg) de peso máximo, (2) avião propelido a turbina de 6.000 libras (2.722 kg) ou menos de peso máximo, e (3) avião monomotor a turbina com mais que 6.000 libras (2.722 kg) de peso máximo, a velocidade de referência do pouso, V_{REF}, não pode ser inferior ao maior entre a V_{MC}, determinada no parágrafo 23.149(c), e $1,3 V_{S1}$.</p> <p>(c) Para aviões multimotores a turbina das categorias normal, utilidade e acrobática de mais que 6.000 libras (2.722 kg) de peso máximo e aviões da categoria transporte regional, a velocidade de referência do pouso, V_{REF}, não pode ser inferior ao maior entre $1,05 V_{MC}$, determinada no parágrafo 23.149(c), e $1,3 V_{S1}$.</p>

[Amdt. 23-62, 76 FR 75754, Dec. 2, 2011]

§ 23.75 Landing distance.

The horizontal distance necessary to land and come to a complete stop from a point 50 feet above the landing surface must be determined, for standard temperatures at each weight and altitude within the operational limits established for landing, as follows:

(a) A steady approach at not less than V_{REF} , determined in accordance with §23.73 (a), (b), or (c), as appropriate, must be maintained down to the 50 foot height and—

(1) The steady approach must be at a gradient of descent not greater than 5.2 percent (3 degrees) down to the 50-foot height.

(2) In addition, an applicant may demonstrate by tests that a maximum steady approach gradient steeper than 5.2 percent, down to the 50-foot height, is safe. The gradient must be established as an operating limitation and the information necessary to display the gradient must be available to the pilot by an appropriate instrument.

(b) A constant configuration must be maintained throughout the maneuver.

(c) The landing must be made without excessive vertical acceleration or tendency to bounce, nose over, ground loop, porpoise, or water loop.

(d) It must be shown that a safe transition to the balked landing conditions of §23.77 can be made from the conditions that exist at the 50 foot height, at maximum landing weight, or at the maximum landing weight for altitude and temperature of §23.63 (c)(2) or (d)(2), as appropriate.

(e) The brakes must be used so as to not cause excessive wear of brakes or tires.

(f) Retardation means other than wheel brakes may be used if that means—

(1) Is safe and reliable; and

(2) Is used so that consistent results can be expected in service.

(g) If any device is used that depends on the operation of any engine, and the landing distance would be increased when a landing is made with that engine inoperative, the landing distance must be determined with that engine inoperative unless the use of other compensating means will result in a landing distance not more than that with each engine operating.

[Amdt. 23–21, 43 FR 2318, Jan. 16, 1978, as amended by Amdt. 23–34, 52 FR 1828, Jan. 15, 1987; Amdt. 23–42, 56 FR 351, Jan. 3, 1991; Amdt. 23–50, 61 FR 5187, Feb. 9, 1996]

<p>23.77 Balked landing.</p> <p>(a) Each normal, utility, and acrobatic category reciprocating engine-powered airplane at 6.000 pounds (2.722 kg) or less maximum weight must be able to maintain a steady gradient of climb at sea level of at least 3,3 percent with:</p>	<p>23.77 Arremetida.</p> <p>(a) Todo avião da categoria normal, utilidade e acrobática, propelidos por motor convencional e de 6.000 libras (2.722 kg) ou menos de peso máximo deve ser capaz de manter um gradiente de subida estabilizado, ao nível do mar, de pelo</p>
--	--

<p>(1) Takeoff power on each engine;</p> <p>(2) The landing gear extended;</p> <p>(3) The wing flaps in the landing position, except that if the flaps may safely be retracted in two seconds or less without loss of altitude and without sudden changes of angle of attack, they may be retracted; and</p> <p>(4) A climb speed equal to V_{REF}, as defined in paragraph 23.73(a).</p> <p>(b) Each of the following normal, utility, and acrobatic category airplanes: (1) reciprocating engine-powered airplane of more than 6.000 pounds (2.722 kg) maximum weight, (2) turbine powered airplane of 6.000 pounds (2.722 kg) or less maximum weight, and (3) single engine turbine powered airplane of more than 6.000 pounds (2.722 kg) maximum weight, must be able to maintain a steady gradient of climb of at least 2,5 percent with:</p> <p>(1) Not more than the power that is available on each engine eight seconds after initiation of movement of the power controls from minimum flight-idle position;</p> <p>(2) The landing gear extended;</p> <p>(3) The wing flaps in the landing position; and</p> <p>(4) A climb speed equal to V_{REF}, as defined in paragraph 23.73(b).</p> <p>(c) Each normal, utility, and acrobatic multiengine turbine powered airplane over 6.000 pounds (2.722 kg) maximum weight and each commuter category airplane must be able to maintain a steady gradient of climb of at least 3,2 percent with:</p> <p>(1) Not more than the power that is available on each engine eight seconds after initiation of movement of the power controls from the minimum flight idle position;</p>	<p>menos 3,3 por cento com:</p> <p>(1) Potência de decolagem em cada motor;</p> <p>(2) O trem de pouso estendido;</p> <p>(3) Os flapes das asas na posição de pouso, exceto que se os flaps puderem ser recolhidos em segurança em dois segundos ou menos, sem perda de altitude e sem mudanças bruscas de ângulo de ataque, eles podem ser recolhidos; e</p> <p>(4) Uma velocidade de subida igual a V_{REF}, tal como definido no parágrafo 23.73(a).</p> <p>(b) Todos os seguintes aviões das categorias normal, utilidade e acrobática: (1) avião propelido por motor convencional de mais que 6.000 libras (2.722 kg) de peso máximo, (2) avião propelido a turbina com 6.000 libras (2.722 kg) ou menos de peso máximo, e (3) avião monomotor a turbina com mais de 6.000 libras (2.722 kg) de peso máximo, devem ser capazes de manter um gradiente de subida estabilizado de pelo menos 2,5 por cento com:</p> <p>(1) Não mais do que a potência que está disponível em cada motor oito segundos após o início do movimento dos controles de potência a partir da posição de marcha lenta mínima em voo;</p> <p>(2) O trem de pouso estendido;</p> <p>(3) Os flapes das asas na posição de pouso; e</p> <p>(4) Uma velocidade de subida igual à V_{REF}, como definida no parágrafo 23.73(b).</p> <p>(c) Todo avião multimotor a turbina de peso máximo maior que 6.000 libras (2.722 Kg) das categorias normal, utilidade e acrobática, e todo avião da categoria transporte regional deve ser capaz de manter um gradiente de subida estabilizado de pelo menos 3,2 por cento com:</p> <p>(1) Não mais do que a potência que está disponível em cada motor oito segundos após o</p>
--	---

<p>(2) Landing gear extended;</p> <p>(3) Wing flaps in the landing position; and</p> <p>(4) A climb speed equal to V_{REF}, as defined in paragraph 23.73(c).</p>	<p>início do movimento dos controles de potência a partir da posição de marcha lenta mínima em voo;</p> <p>(2) O trem de pouso estendido;</p> <p>(3) Os flapes das asas na posição de pouso; e</p> <p>(4) Uma velocidade de subida igual à V_{REF}, como definida no parágrafo 23.73(c).</p>
--	---

[Doc. No. 27807, 61 FR 5187, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75754, Dec. 2, 2011]

Flight Characteristics

§ 23.141 General.

The airplane must meet the requirements of §§23.143 through 23.253 at all practical loading conditions and operating altitudes for which certification has been requested, not exceeding the maximum operating altitude established under §23.1527, and without requiring exceptional piloting skill, alertness, or strength.

[Doc. No. 26269, 58 FR 42156, Aug. 6, 1993]

Controllability and Maneuverability

§ 23.143 General.

(a) The airplane must be safely controllable and maneuverable during all flight phases including—

- (1) Takeoff;
- (2) Climb;
- (3) Level flight;
- (4) Descent;
- (5) Go-around; and

(6) Landing (power on and power off) with the wing flaps extended and retracted.

(b) It must be possible to make a smooth transition from one flight condition to another (including turns and slips) without danger of exceeding the limit load factor, under any probable operating condition (including, for multiengine airplanes, those conditions normally encountered in the sudden failure of any engine).

(c) If marginal conditions exist with regard to required pilot strength, the control forces necessary

must be determined by quantitative tests. In no case may the control forces under the conditions specified in paragraphs (a) and (b) of this section exceed those prescribed in the following table:

Values in pounds force applied to the relevant control	Pitch	Roll	Yaw
(a) For temporary application:			
Stick	60	30	
Wheel (Two hands on rim)	75	50	
Wheel (One hand on rim)	50	25	
Rudder Pedal			150
(b) For prolonged application	10	5	20

[Doc. No, 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31819, Nov. 19, 1973; Amdt. 23–17, 41 FR 55464, Dec. 20, 1976; Amdt. 23–45, 58 FR 42156, Aug. 6, 1993; Amdt. 23–50, 61 FR 5188, Feb. 9, 1996]

§ 23.145 Longitudinal control.

(a) With the airplane as nearly as possible in trim at $1.3 V_{S1}$, it must be possible, at speeds below the trim speed, to pitch the nose downward so that the rate of increase in airspeed allows prompt acceleration to the trim speed with—

- (1) Maximum continuous power on each engine;
- (2) Power off; and
- (3) Wing flap and landing gear—
 - (i) retracted, and
 - (ii) extended.

(b) Unless otherwise required, it must be possible to carry out the following maneuvers without requiring the application of single-handed control forces exceeding those specified in §23.143(c). The trimming controls must not be adjusted during the maneuvers:

- (1) With the landing gear extended, the flaps retracted, and the airplanes as nearly as possible in trim at $1.4 V_{S1}$, extend the flaps as rapidly as possible and allow the airspeed to transition from $1.4V_{S1}$ to $1.4 V_{SO}$:
 - (i) With power off; and
 - (ii) With the power necessary to maintain level flight in the initial condition.
- (2) With landing gear and flaps extended, power off, and the airplane as nearly as possible in trim at $1.3 V_{SO}$: quickly apply takeoff power and retract the flaps as rapidly as possible to the recommended go around setting and allow the airspeed to transition from $1.3 V_{SO}$ to $1.3 V_{S1}$. Retract

the gear when a positive rate of climb is established.

(3) With landing gear and flaps extended, in level flight, power necessary to attain level flight at $1.1 V_{SO}$, and the airplane as nearly as possible in trim, it must be possible to maintain approximately level flight while retracting the flaps as rapidly as possible with simultaneous application of not more than maximum continuous power. If gated flap positions are provided, the flap retraction may be demonstrated in stages with power and trim reset for level flight at $1.1 V_{S1}$, in the initial configuration for each stage—

(i) From the fully extended position to the most extended gated position;

(ii) Between intermediate gated positions, if applicable; and

(iii) From the least extended gated position to the fully retracted position.

(4) With power off, flaps and landing gear retracted and the airplane as nearly as possible in trim at $1.4 V_{S1}$, apply takeoff power rapidly while maintaining the same airspeed.

(5) With power off, landing gear and flaps extended, and the airplane as nearly as possible in trim at V_{REF} , obtain and maintain airspeeds between $1.1 V_{SO}$, and either $1.7 V_{SO}$ or V_{FE} , whichever is lower without requiring the application of two-handed control forces exceeding those specified in §23.143(c).

(6) With maximum takeoff power, landing gear retracted, flaps in the takeoff position, and the airplane as nearly as possible in trim at V_{FE} appropriate to the takeoff flap position, retract the flaps as rapidly as possible while maintaining constant speed.

(c) At speeds above V_{MO}/M_{MO} , and up to the maximum speed shown under §23.251, a maneuvering capability of 1.5 g must be demonstrated to provide a margin to recover from upset or inadvertent speed increase.

(d) It must be possible, with a pilot control force of not more than 10 pounds, to maintain a speed of not more than V_{REF} during a power-off glide with landing gear and wing flaps extended, for any weight of the airplane, up to and including the maximum weight.

(e) By using normal flight and power controls, except as otherwise noted in paragraphs (e)(1) and (e)(2) of this section, it must be possible to establish a zero rate of descent at an attitude suitable for a controlled landing without exceeding the operational and structural limitations of the airplane, as follows:

(1) For single-engine and multiengine airplanes, without the use of the primary longitudinal control system.

(2) For multiengine airplanes—

(i) Without the use of the primary directional control; and

(ii) If a single failure of any one connecting or transmitting link would affect both the longitudinal and directional primary control system, without the primary longitudinal and directional control

system.

[Doc. No. 26269, 58 FR 42157, Aug. 6, 1993; Amdt. 23–45, 58 FR 51970, Oct. 5, 1993, as amended by Amdt. 23–50, 61 FR 5188, Feb. 9, 1996]

§ 23.147 Directional and lateral control.

(a) For each multiengine airplane, it must be possible, while holding the wings level within five degrees, to make sudden changes in heading safely in both directions. This ability must be shown at $1.4 V_{S1}$ with heading changes up to 15 degrees, except that the heading change at which the rudder force corresponds to the limits specified in §23.143 need not be exceeded, with the—

(1) Critical engine inoperative and its propeller in the minimum drag position;

(2) Remaining engines at maximum continuous power;

(3) Landing gear—

(i) Retracted; and

(ii) Extended; and

(4) Flaps retracted.

(b) For each multiengine airplane, it must be possible to regain full control of the airplane without exceeding a bank angle of 45 degrees, reaching a dangerous attitude or encountering dangerous characteristics, in the event of a sudden and complete failure of the critical engine, making allowance for a delay of two seconds in the initiation of recovery action appropriate to the situation, with the airplane initially in trim, in the following condition:

(1) Maximum continuous power on each engine;

(2) The wing flaps retracted;

(3) The landing gear retracted;

(4) A speed equal to that at which compliance with §23.69(a) has been shown; and

(5) All propeller controls in the position at which compliance with §23.69(a) has been shown.

(c) For all airplanes, it must be shown that the airplane is safely controllable without the use of the primary lateral control system in any all-engine configuration(s) and at any speed or altitude within the approved operating envelope. It must also be shown that the airplane's flight characteristics are not impaired below a level needed to permit continued safe flight and the ability to maintain attitudes suitable for a controlled landing without exceeding the operational and structural limitations of the airplane. If a single failure of any one connecting or transmitting link in the lateral control system would also cause the loss of additional control system(s), compliance with the above requirement must be shown with those additional systems also assumed to be inoperative.

[Doc. No. 27807, 61 FR 5188, Feb. 9, 1996]

§ 23.149 Minimum control speed.

(a) V_{MC} is the calibrated airspeed at which, when the critical engine is suddenly made inoperative, it is possible to maintain control of the airplane with that engine still inoperative, and thereafter maintain straight flight at the same speed with an angle of bank of not more than 5 degrees. The method used to simulate critical engine failure must represent the most critical mode of powerplant failure expected in service with respect to controllability.

(b) V_{MC} for takeoff must not exceed $1.2 V_{S1}$, where V_{S1} is determined at the maximum takeoff weight. V_{MC} must be determined with the most unfavorable weight and center of gravity position and with the airplane airborne and the ground effect negligible, for the takeoff configuration(s) with—

- (1) Maximum available takeoff power initially on each engine;
- (2) The airplane trimmed for takeoff;
- (3) Flaps in the takeoff position(s);
- (4) Landing gear retracted; and
- (5) All propeller controls in the recommended takeoff position throughout.

(c) For all airplanes except reciprocating engine-powered airplanes of 6,000 pounds or less maximum weight, the conditions of paragraph (a) of this section must also be met for the landing configuration with—

- (1) Maximum available takeoff power initially on each engine;
- (2) The airplane trimmed for an approach, with all engines operating, at V_{REF} , at an approach gradient equal to the steepest used in the landing distance demonstration of §23.75;
- (3) Flaps in the landing position;
- (4) Landing gear extended; and
- (5) All propeller controls in the position recommended for approach with all engines operating.

(d) A minimum speed to intentionally render the critical engine inoperative must be established and designated as the safe, intentional, one-engine-inoperative speed, V_{SSE} .

(e) At V_{MC} , the rudder pedal force required to maintain control must not exceed 150 pounds and it must not be necessary to reduce power of the operative engine(s). During the maneuver, the airplane must not assume any dangerous attitude and it must be possible to prevent a heading change of more than 20 degrees.

(f) At the option of the applicant, to comply with the requirements of §23.51(c)(1), V_{MCG} may be

determined. V_{MCG} is the minimum control speed on the ground, and is the calibrated airspeed during the takeoff run at which, when the critical engine is suddenly made inoperative, it is possible to maintain control of the airplane using the rudder control alone (without the use of nosewheel steering), as limited by 150 pounds of force, and using the lateral control to the extent of keeping the wings level to enable the takeoff to be safely continued. In the determination of V_{MCG} , assuming that the path of the airplane accelerating with all engines operating is along the centerline of the runway, its path from the point at which the critical engine is made inoperative to the point at which recovery to a direction parallel to the centerline is completed may not deviate more than 30 feet laterally from the centerline at any point. V_{MCG} must be established with—

- (1) The airplane in each takeoff configuration or, at the option of the applicant, in the most critical takeoff configuration;
- (2) Maximum available takeoff power on the operating engines;
- (3) The most unfavorable center of gravity;
- (4) The airplane trimmed for takeoff; and
- (5) The most unfavorable weight in the range of takeoff weights.

[Doc. No. 27807, 61 FR 5189, Feb. 9, 1996]

§ 23.151 Acrobatic maneuvers.

Each acrobatic and utility category airplane must be able to perform safely the acrobatic maneuvers for which certification is requested. Safe entry speeds for these maneuvers must be determined.

§ 23.153 Control during landings.

It must be possible, while in the landing configuration, to safely complete a landing without exceeding the one-hand control force limits specified in §23.143(c) following an approach to land—

- (a) At a speed of V_{REF} minus 5 knots;
- (b) With the airplane in trim, or as nearly as possible in trim and without the trimming control being moved throughout the maneuver;
- (c) At an approach gradient equal to the steepest used in the landing distance demonstration of §23.75; and
- (d) With only those power changes, if any, that would be made when landing normally from an approach at V_{REF} .

[Doc. No. 27807, 61 FR 5189, Feb. 9, 1996]

§ 23.155 Elevator control force in maneuvers.

- (a) The elevator control force needed to achieve the positive limit maneuvering load factor may not

be less than:

(1) For wheel controls, $W/100$ (where W is the maximum weight) or 20 pounds, whichever is greater, except that it need not be greater than 50 pounds; or

(2) For stick controls, $W/140$ (where W is the maximum weight) or 15 pounds, whichever is greater, except that it need not be greater than 35 pounds.

(b) The requirement of paragraph (a) of this section must be met at 75 percent of maximum continuous power for reciprocating engines, or the maximum continuous power for turbine engines, and with the wing flaps and landing gear retracted—

(1) In a turn, with the trim setting used for wings level flight at V_O ; and

(2) In a turn with the trim setting used for the maximum wings level flight speed, except that the speed may not exceed V_{NE} or V_{MO}/M_{MO} , whichever is appropriate.

(c) There must be no excessive decrease in the gradient of the curve of stick force versus maneuvering load factor with increasing load factor.

[Amdt. 23–14, 38 FR 31819, Nov. 19, 1973; 38 FR 32784, Nov. 28, 1973, as amended by Amdt. 23–45, 58 FR 42158, Aug. 6, 1993; Amdt. 23–50, 61 FR 5189 Feb. 9, 1996]

§ 23.157 Rate of roll.

(a) Takeoff. It must be possible, using a favorable combination of controls, to roll the airplane from a steady 30-degree banked turn through an angle of 60 degrees, so as to reverse the direction of the turn within:

(1) For an airplane of 6,000 pounds or less maximum weight, 5 seconds from initiation of roll; and

(2) For an airplane of over 6,000 pounds maximum weight,

$(W+500)/1,300$

seconds, but not more than 10 seconds, where W is the weight in pounds.

(b) The requirement of paragraph (a) of this section must be met when rolling the airplane in each direction with—

(1) Flaps in the takeoff position;

(2) Landing gear retracted;

(3) For a single-engine airplane, at maximum takeoff power; and for a multiengine airplane with the critical engine inoperative and the propeller in the minimum drag position, and the other engines at maximum takeoff power; and

(4) The airplane trimmed at a speed equal to the greater of $1.2 V_{S1}$ or $1.1 V_{MC}$, or as nearly as

possible in trim for straight flight.

(c) Approach. It must be possible, using a favorable combination of controls, to roll the airplane from a steady 30-degree banked turn through an angle of 60 degrees, so as to reverse the direction of the turn within:

- (1) For an airplane of 6,000 pounds or less maximum weight, 4 seconds from initiation of roll; and
- (2) For an airplane of over 6,000 pounds maximum weight,
(W+2,800)/2,200

seconds, but not more than 7 seconds, where W is the weight in pounds.

(d) The requirement of paragraph (c) of this section must be met when rolling the airplane in each direction in the following conditions—

- (1) Flaps in the landing position(s);
- (2) Landing gear extended;
- (3) All engines operating at the power for a 3 degree approach; and
- (4) The airplane trimmed at V_{REF}.

[Amdt. 23–14, 38 FR 31819, Nov. 19, 1973, as amended by Amdt. 23–45, 58 FR 42158, Aug. 6, 1993; Amdt. 23–50, 61 FR 5189, Feb. 9, 1996]

Trim

<p>23.161 Trim.</p> <p>(a) General. Each airplane must meet the trim requirements of this section after being trimmed and without further pressure upon, or movement of, the primary controls or their corresponding trim controls by the pilot or the automatic pilot. In addition, it must be possible, in other conditions of loading, configuration, speed and power to ensure that the pilot will not be unduly fatigued or distracted by the need to apply residual control forces exceeding those for prolonged application of paragraph 23.143(c). This applies in normal operation of the airplane and, if applicable, to those conditions associated with the failure of one engine for which performance characteristics are established.</p> <p>(b) Lateral and directional trim. The airplane</p>	<p>23.161 Compensação.</p> <p>(a) Geral. Cada avião deve cumprir os requisitos de compensação desta seção depois de ser compensado e sem nenhuma pressão ou movimento adicionais nos controles primários ou seus controles de compensação correspondentes pelo piloto ou pelo piloto automático. Além disso, deve ser possível, em outras condições de carregamento, configuração, velocidade e potência garantir que o piloto não seja excessivamente fatigado ou distraído pela necessidade de aplicar forças de controle residuais que excedam aquelas prescritas para aplicação prolongada de acordo com o parágrafo 23.143 (c). Isso se aplica à operação normal do avião, e se aplicável, para aquelas condições associadas à falha de um motor para as quais as características de</p>
---	--

<p>must maintain lateral and directional trim in level flight with the landing gear and wing flaps retracted as follows:</p> <p>(1) For normal, utility, and acrobatic category airplanes, at a speed of $0,9 V_H$, V_C, or V_{MO}/M_{MO}, whichever is lowest; and</p> <p>(2) For commuter category airplanes, at all speeds from $1,4 V_{S1}$ to the lesser of V_H or V_{MO}/M_{MO}.</p> <p>(c) Longitudinal trim. The airplane must maintain longitudinal trim under each of the following conditions:</p> <p>(1) A climb with:</p> <p>(i) Takeoff power, landing gear retracted, wing flaps in the takeoff position(s), at the speeds used in determining the climb performance required by section 23.65; and</p> <p>(ii) Maximum continuous power at the speeds and in the configuration used in determining the climb performance required by paragraph 23.69(a).</p> <p>(2) Level flight at all speeds from the lesser of V_H and either V_{NO} or V_{MO}/M_{MO} (as appropriate), to $1,4 V_{S1}$, with the landing gear and flaps retracted.</p> <p>(3) A descent at V_{NO} or V_{MO}/M_{MO}, whichever is applicable, with power off and with the landing gear and flaps retracted.</p> <p>(4) Approach with landing gear extended and with:</p> <p>(i) A 3 degree angle of descent, with flaps retracted and at a speed of $1,4 V_{S1}$;</p> <p>(ii) A 3 degree angle of descent, flaps in the landing position(s) at V_{REF}; and</p> <p>(iii) An approach gradient equal to the steepest used in the landing distance demonstrations of section 23.75, flaps in the landing position(s) at</p>	<p>desempenho são estabelecidas.</p> <p>(b) Compensação lateral e direcional. O avião deve manter compensação lateral e direcional em voo nivelado com o trem de pouso e flapes das asas recolhidos conforme segue:</p> <p>(1) Para aviões das categorias normal, utilidade e acrobática, na velocidade de $0,9 V_H$, V_C ou V_{MO}/M_{MO}, o que for menor, e;</p> <p>(2) Para aviões da categoria transporte regional, em todas as velocidades a partir de $1,4 V_{S1}$ até a menor entre V_H ou V_{MO}/M_{MO}.</p> <p>(c) Compensação longitudinal. O avião deve manter compensação longitudinal sob cada uma das seguintes condições:</p> <p>(1) Uma subida com:</p> <p>(i) Potência de decolagem, trem de pouso recolhido, flapes das asas na(s) posição(ões) de decolagem, nas velocidades usadas para determinar o desempenho de subida requerido pela seção 23.65; e</p> <p>(ii) Máxima potência contínua nas velocidades e configuração usadas para determinar o desempenho de subida requerido pelo parágrafo 23.69(a).</p> <p>(2) Voo nivelado em todas as velocidades a partir da menor entre V_H e V_{NO} ou V_{MO}/M_{MO} (como apropriado) até $1,4 V_{S1}$, com trem de pouso e flapes recolhidos.</p> <p>(3) Uma descida em V_{NO} ou V_{MO}/M_{MO}, o que for aplicável, sem potência e com trem de pouso e flapes recolhidos.</p> <p>(4) Aproximação com trem de pouso estendido e com:</p> <p>(i) Um ângulo de descida de 3 graus, com flapes recolhidos e com uma velocidade de $1,4 V_{S1}$;</p> <p>(ii) Um ângulo de descida de 3 graus, flapes</p>
--	---

<p>V_{REF}.</p> <p>(d) In addition, each multiengine airplane must maintain longitudinal and directional trim, and the lateral control force must not exceed 5 pounds at the speed used in complying with paragraphs 23.67(a), (b)(2), (c)(2), or (d)(3), as appropriate, with</p> <p>(1) The critical engine inoperative, and if applicable, its propeller in the minimum drag position;</p> <p>(2) The remaining engines at maximum continuous power;</p> <p>(3) The landing gear retracted;</p> <p>(4) Wing flaps retracted; and</p> <p>(5) An angle of bank of not more than five degrees.</p> <p>(e) In addition, each commuter category airplane for which, in the determination of the takeoff path in accordance with section 23.57, the climb in the takeoff configuration at V_2 extends beyond 400 feet above the takeoff surface, it must be possible to reduce the longitudinal and lateral control forces to 10 pounds and 5 pounds, respectively, and the directional control force must not exceed 50 pounds at V_2 with:</p> <p>(1) The critical engine inoperative and its propeller in the minimum drag position;</p> <p>(2) The remaining engine(s) at takeoff power;</p> <p>(3) Landing gear retracted;</p> <p>(4) Wing flaps in the takeoff position(s); and</p> <p>(5) An angle of bank not exceeding 5 degrees.</p>	<p>na(s) posição(ões) de pouso e na V_{REF}; e</p> <p>(iii) Um gradiente de aproximação igual ao mais íngreme usado nas demonstrações de distância de pouso da seção 23.75, flapes na(s) posição(ões) de pouso e na V_{REF}.</p> <p>(d) Adicionalmente, todo avião multimotor deve manter compensação longitudinal e direcional, e a força de controle lateral não pode exceder 5 libras na velocidade usada para cumprimento com os parágrafos 23.67(a), (b)(2), (c)(2) ou (d)(3), conforme apropriado, com:</p> <p>(1) O motor crítico inoperante, e se aplicável, sua hélice na posição de arrasto mínimo;</p> <p>(2) Os motores remanescentes na potência máxima contínua;</p> <p>(3) O trem de pouso recolhido;</p> <p>(4) Flapes das asas recolhidos; e</p> <p>(5) Um ângulo de inclinação lateral de não mais que cinco graus.</p> <p>(e) Adicionalmente, todo avião da categoria transporte regional para o qual, na determinação da trajetória de decolagem de acordo com a seção 23.57, a subida na configuração de decolagem na V_2 se estenda além de 400 pés acima da superfície de decolagem, deve ser possível reduzir as forças nos controles longitudinal e lateral para 10 libras e 5 libras, respectivamente, e a força no controle direcional não pode exceder 50 libras na V_2 com:</p> <p>(1) O motor crítico inoperante e sua hélice na posição de arrasto mínimo;</p> <p>(2) O(s) motor(es) remanescente(s) em potência de decolagem;</p> <p>(3) O trem de pouso recolhido;</p> <p>(4) Os flapes das asas na(s) posição(ões) de</p>
--	---

	decolagem; e (5) Um ângulo de inclinação lateral que não exceda 5 graus.
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-21, 43 FR 2318, Jan. 16, 1978; Amdt. 23-34, 52 FR 1828, Jan. 15, 1987; Amdt. 23-42, 56 FR 351, Jan. 3, 1991; 56 FR 5455, Feb. 11, 1991; Amdt. 23-50, 61 FR 5189, Feb. 9, 1996]

Stability

§ 23.171 General.

The airplane must be longitudinally, directionally, and laterally stable under §§23.173 through 23.181. In addition, the airplane must show suitable stability and control “feel” (static stability) in any condition normally encountered in service, if flight tests show it is necessary for safe operation.

§ 23.173 Static longitudinal stability.

Under the conditions specified in §23.175 and with the airplane trimmed as indicated, the characteristics of the elevator control forces and the friction within the control system must be as follows:

- (a) A pull must be required to obtain and maintain speeds below the specified trim speed and a push required to obtain and maintain speeds above the specified trim speed. This must be shown at any speed that can be obtained, except that speeds requiring a control force in excess of 40 pounds or speeds above the maximum allowable speed or below the minimum speed for steady unstalled flight, need not be considered.
- (b) The airspeed must return to within the tolerances specified for applicable categories of airplanes when the control force is slowly released at any speed within the speed range specified in paragraph (a) of this section. The applicable tolerances are—
 - (1) The airspeed must return to within plus or minus 10 percent of the original trim airspeed; and
 - (2) For commuter category airplanes, the airspeed must return to within plus or minus 7.5 percent of the original trim airspeed for the cruising condition specified in §23.175(b).
- (c) The stick force must vary with speed so that any substantial speed change results in a stick force clearly perceptible to the pilot.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31820 Nov. 19, 1973; Amdt. 23–34, 52 FR 1828, Jan. 15, 1987]

§ 23.175 Demonstration of static longitudinal stability.

Static longitudinal stability must be shown as follows:

- (a) Climb. The stick force curve must have a stable slope at speeds between 85 and 115 percent of

the trim speed, with—

- (1) Flaps retracted;
- (2) Landing gear retracted;
- (3) Maximum continuous power; and
- (4) The airplane trimmed at the speed used in determining the climb performance required by §23.69(a).

(b) Cruise. With flaps and landing gear retracted and the airplane in trim with power for level flight at representative cruising speeds at high and low altitudes, including speeds up to V_{NO} or V_{MO}/M_{MO} , as appropriate, except that the speed need not exceed V_H —

(1) For normal, utility, and acrobatic category airplanes, the stick force curve must have a stable slope at all speeds within a range that is the greater of 15 percent of the trim speed plus the resulting free return speed range, or 40 knots plus the resulting free return speed range, above and below the trim speed, except that the slope need not be stable—

- (i) At speeds less than $1.3 V_{S1}$; or
- (ii) For airplanes with V_{NE} established under §23.1505(a), at speeds greater than V_{NE} ; or
- (iii) For airplanes with V_{MO}/M_{MO} established under §23.1505(c), at speeds greater than V_{FC}/M_{FC} .

(2) For commuter category airplanes, the stick force curve must have a stable slope at all speeds within a range of 50 knots plus the resulting free return speed range, above and below the trim speed, except that the slope need not be stable—

- (i) At speeds less than $1.4 V_{S1}$; or
- (ii) At speeds greater than V_{FC}/M_{FC} ; or
- (iii) At speeds that require a stick force greater than 50 pounds.

(c) Landing. The stick force curve must have a stable slope at speeds between $1.1 V_{S1}$ and $1.8 V_{S1}$ with—

- (1) Flaps in the landing position;
- (2) Landing gear extended; and
- (3) The airplane trimmed at—
 - (i) V_{REF} , or the minimum trim speed if higher, with power off; and
 - (ii) V_{REF} with enough power to maintain a 3 degree angle of descent.

[Doc. No. 27807, 61 FR 5190, Feb. 9, 1996]

<p>23.177 Static directional and lateral stability.</p> <p>(a)(1) The static directional stability, as shown by the tendency to recover from a wings level sideslip with the rudder free, must be positive for any landing gear and flap position appropriate to the takeoff, climb, cruise, approach, and landing configurations. This must be shown with symmetrical power up to maximum continuous power, and at speeds from $1,2 V_{S1}$ up to V_{FE}, V_{LE}, V_{NO}, $V_{FC/MFC}$, whichever is appropriate.</p> <p>(2) The angle of sideslip for these tests must be appropriate to the type of airplane. The rudder pedal force must not reverse at larger angles of sideslip, up to that at which full rudder is used or a control force limit in section 23.143 is reached, whichever occurs first, and at speeds from $1,2 V_{S1}$ to V_0.</p> <p>(b)(1) The static lateral stability, as shown by the tendency to raise the low wing in a sideslip with the aileron controls free, may not be negative for any landing gear and flap position appropriate to the takeoff, climb, cruise, approach, and landing configurations. This must be shown with symmetrical power from idle up to 75 percent of maximum continuous power at speeds from $1,2 V_{S1}$ in the takeoff configuration(s) and at speeds from $1,3 V_{S1}$ in other configurations, up to the maximum allowable airspeed for the configuration being investigated (V_{FE}, V_{LE}, V_{NO}, $V_{FC/MFC}$, whichever is appropriate) in the takeoff, climb, cruise, descent, and approach configurations. For the landing configuration, the power must be that necessary to maintain a 3-degree angle of descent in coordinated flight.</p> <p>(2) The static lateral stability may not be negative at $1,2 V_{S1}$ in the takeoff configuration, or at $1,3 V_{S1}$ in other configurations.</p> <p>(3) The angle of sideslip for these tests must be appropriate to the type of airplane, but in no</p>	<p>23.177 Estabilidade Estática Direcional e Lateral.</p> <p>(a)(1) A estabilidade estática direcional, verificada pela tendência de recuperação de uma derrapagem com asa nivelada com o leme livre, deve ser positiva para qualquer posição de trem de pouso e flapes apropriada para as configurações de decolagem, subida, cruzeiro, aproximação e pouso. Isso deve ser demonstrado com potência simétrica até a potência máxima contínua e em velocidades desde $1,2 V_{S1}$ até V_{FE}, V_{LE}, V_{NO}, $V_{FC/MFC}$, o que for apropriado.</p> <p>(2) O ângulo de derrapagem para estes testes deve ser apropriado para o tipo de avião. A força no pedal do leme não pode reverter em ângulos de derrapagem maiores, até aquele em que o leme todo é usado ou a força nos controles limite da seção 23.143 é alcançada, o que ocorrer antes, e em velocidades desde $1,2 V_{S1}$ a V_0.</p> <p>(b)(1) A estabilidade estática lateral, verificada pela tendência de levantar a asa baixa em uma derrapagem com os controles de ailerons livres, não pode ser negativa para quaisquer posições de trem de pouso e flapes apropriadas para as configurações de decolagem, cruzeiro, aproximação, e pouso. Isso deve ser demonstrado com potência simétrica da marcha lenta até 75 por cento da potência máxima contínua em velocidades a partir de $1,2 V_{S1}$ na(s) configuração(ões) de decolagem e nas velocidades a partir de $1,3 V_{S1}$ em outras configurações, até a máxima velocidade aerodinâmica permitida para a configuração sendo investigada (V_{FE}, V_{LE}, V_{NO}, $V_{FC/MFC}$, o que for apropriado), nas configurações de decolagem, subida, cruzeiro, descida e aproximação. Para a configuração de pouso, a potência deve ser a necessária para manter um ângulo de descida de 3 graus em voo coordenado.</p> <p>(2) A estabilidade estática lateral não pode ser</p>
---	--

<p>case may the constant heading sideslip angle be less than that obtainable with a 10 degree bank or, if less, the maximum bank angle obtainable with full rudder deflection or 150 pound rudder force.</p> <p>(c) Paragraph (b) of this section does not apply to acrobatic category airplanes certificated for inverted flight.</p> <p>(d)(1) In straight, steady slips at $1,2 V_{S1}$ for any landing gear and flap position appropriate to the takeoff, climb, cruise, approach, and landing configurations, and for any symmetrical power conditions up to 50 percent of maximum continuous power, the aileron and rudder control movements and forces must increase steadily, but not necessarily in constant proportion, as the angle of sideslip is increased up to the maximum appropriate to the type of airplane.</p> <p>(2) At larger slip angles, up to the angle at which the full rudder or aileron control is used or a control force limit contained in section 23.143 is reached, the aileron and rudder control movements and forces may not reverse as the angle of sideslip is increased.</p> <p>(3) Rapid entry into, and recovery from, a maximum sideslip considered appropriate for the airplane may not result in uncontrollable flight characteristics.</p>	<p>negativa em $1,2 V_{S1}$ na configuração de decolagem, ou em $1,3 V_{S1}$ em outras configurações.</p> <p>(3) O ângulo de derrapagem para estes testes deve ser apropriado para o tipo de avião, mas em nenhum caso o ângulo de derrapagem com proa constante deve ser inferior ao obtido com 10 graus de inclinação lateral, ou se menor, o ângulo máximo de inclinação lateral obtido com deflexão total do leme ou 150 libras de força de leme.</p> <p>(c) O parágrafo (b) desta seção não se aplica a aviões de categoria acrobática certificados para voo invertido.</p> <p>(d)(1) Em derrapagens estabilizada em voo reto a $1,2 V_{S1}$ para quaisquer posições de flapes e trem de pouso apropriada para as configurações de decolagem, subida, cruzeiro, aproximação, e pouso, e para qualquer condição de potência simétrica até 50 por cento da potência máxima contínua, os movimentos e forças de controle de leme e aileron devem crescer continuamente, mas não necessariamente em proporção constante, à medida que o ângulo de derrapagem é aumentado até o máximo apropriado ao tipo de avião.</p> <p>(2) Em ângulos de derrapagem maiores, até o ângulo em que todo o controle de leme ou aileron é usado ou a força de controle limite contida na seção 23.143 é alcançada, os movimentos e forças dos controles de leme e aileron não podem reverter à medida que o ângulo de derrapagem é aumentado.</p> <p>(3) Uma entrada rápida, e recuperação da máxima derrapagem considerada apropriada para o avião não pode resultar em características de voo incontroláveis.</p>
---	--

[Doc. No. 27807, 61 FR 5190, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75754, Dec. 2, 2011]

<p>23.181 Dynamic stability.</p> <p>(a) Any short period oscillation not including</p>	<p>23.181 Estabilidade Dinâmica.</p> <p>(a) Qualquer oscilação de curto-período não</p>
---	--

combined lateral-directional oscillations occurring between the stalling speed and the maximum allowable speed appropriate to the configuration of the airplane must be heavily damped with the primary controls:

- (1) Free; and
- (2) In a fixed position.

(b) Any combined lateral-directional oscillations (Dutch roll) occurring between the stalling speed and the maximum allowable speed (V_{FE} , V_{LE} , V_{NO} , V_{FC}/M_{FC}) appropriate to the configuration of the airplane with the primary controls in both free and fixed position, must be damped to 1/10 amplitude in:

- (1) Seven (7) cycles below 18.000 feet (5.486,4 m) and
- (2) Thirteen (13) cycles from 18.000 feet (5.486,4 m) to the certified maximum altitude.

(c) If it is determined that the function of a stability augmentation system, reference section 23.672, is needed to meet the flight characteristic requirements of this part, the primary control requirements of paragraphs (a)(2) and the fixed position testing of (b) of this section are not applicable to the tests needed to verify the acceptability of that system.

(d) During the conditions as specified in section 23.175, when the longitudinal control force required to maintain speeds differing from the trim speed by at least plus and minus 15 percent is suddenly released, the response of the airplane must not exhibit any dangerous characteristics nor be excessive in relation to the magnitude of the control force released. Any long-period oscillation of flight path, phugoid oscillation, that results must not be so unstable as to increase the pilot's workload or otherwise endanger the airplane.

incluindo oscilações combinadas látero-direcional que ocorram entre a velocidade de estol e a velocidade máxima permitida apropriada para a configuração do avião deve ser fortemente amortecida com os controles primários:

- (1) Livres; e
- (2) Numa posição fixa.

(b) Quaisquer oscilações combinadas látero-direcional (“*Dutch roll*”) que ocorram entre a velocidade de estol e a velocidade máxima permitida (V_{FE} , V_{LE} , V_{NO} , V_{FC}/M_{FC}) apropriada para a configuração do avião com os controles primários em ambas posições fixa e livre, devem ser amortecidas a 1/10 da amplitude em:

- (1) Sete (7) ciclos abaixo de 18.000 pés (5.486,4 m) e
- (2) Treze (13) ciclos de 18.000 pés (5.486,4 m) até a máxima altitude certificada.

(c) Se for determinado que a função de um sistema de estabilidade aumentada (vide seção 23.672) é necessária para cumprimento dos requisitos de característica de voo deste RBAC, os requisitos de controle primário do parágrafo (a)(2) e o teste da posição fixa do parágrafo (b) desta seção não são aplicáveis para os testes necessários para verificar a aceitabilidade deste sistema.

(d) Durante as condições especificadas na seção 23.175, quando a força de controle longitudinal requerida para manter as velocidades distintas da velocidade de compensação em mais ou menos 15 por cento pelo menos é solta subitamente, a resposta do avião não pode exibir quaisquer características perigosas nem deve ser excessiva em relação à magnitude da força de controle liberada. Qualquer oscilação de longo-período da trajetória de voo, oscilação de fugoide, que resulte não pode ser tão instável de modo a aumentar a carga de trabalho do piloto ou então ameaçar o avião.

[Amdt. 23-21, 43 FR 2318, Jan. 16, 1978, as amended by Amdt. 23-45, 58 FR 42158, Aug. 6, 1993; Amdt. 23-62, 76 FR 75755, Dec. 2, 2011]

Stalls

<p>23.201 Wings level stall.</p> <p>(a) It must be possible to produce and to correct roll by unreversed use of the rolling control and to produce and to correct yaw by unreversed use of the directional control, up to the time the airplane stalls.</p> <p>(b) The wings level stall characteristics must be demonstrated in flight as follows. Starting from a speed at least 10 knots above the stall speed, the elevator control must be pulled back so that the rate of speed reduction will not exceed one knot per second until a stall is produced, as shown by either:</p> <p>(1) An uncontrollable downward pitching motion of the airplane;</p> <p>(2) A downward pitching motion of the airplane that results from the activation of a stall avoidance device (for example, stick pusher); or</p> <p>(3) The control reaching the stop.</p> <p>(c) Normal use of elevator control for recovery is allowed after the downward pitching motion of paragraphs (b)(1) or (b)(2) of this section has unmistakably been produced, or after the control has been held against the stop for not less than the longer of two seconds or the time employed in the minimum steady slight speed determination of section 23.49.</p> <p>(d) During the entry into and the recovery from the maneuver, it must be possible to prevent more than 15 degrees of roll or yaw by the normal use of controls except as provided for in paragraph (e) of this section.</p> <p>(e) For airplanes approved with a maximum operating altitude at or above 25.000 feet (7.620 metros) during the entry into and the</p>	<p>23.201 Estol de asas niveladas.</p> <p>(a) Deve ser possível produzir e corrigir um rolamento pelo uso sem reversão do controle de rolamento e produzir e corrigir uma guinada pelo uso sem reversão do controle direcional, até o momento em que o avião estola.</p> <p>(b) As características de estol com asas niveladas devem ser demonstradas em voo como segue. A partir de uma velocidade pelo menos 10 nós acima da velocidade de estol, o controle do profundor deve ser puxado para trás de modo que a taxa de redução de velocidade não exceda um nó por segundo até que um estol seja produzido, como evidenciado por qualquer um destes:</p> <p>(1) Um movimento de picada incontrolável do avião;</p> <p>(2) Um movimento de picada do avião decorrente da ativação de um dispositivo de prevenção de estol (por exemplo, “stick pusher”); ou</p> <p>(3) O controle atingindo o batente.</p> <p>(c) A utilização normal do controle do profundor para a recuperação é permitida após o acontecimento inequívoco do movimento de picada dos parágrafos (b)(1) ou (b)(2) desta seção, ou após o controle ter sido mantido no batente por ao menos o mais longo entre dois segundos ou o tempo empregado na determinação da velocidade mínima em voo estabilizado da seção 23.49.</p> <p>(d) Durante a entrada e a recuperação da manobra, deve ser possível evitar, pelo uso normal dos controles, rolamentos e guinadas de mais que 15 graus, exceto como previsto no parágrafo (e) desta seção.</p>
---	---

recovery from stalls performed at or above 25.000 feet (7.620 metros), it must be possible to prevent more than 25 degrees of roll or yaw by the normal use of controls.

(f) Compliance with the requirements of this section must be shown under the following conditions:

(1) Wing flaps. Retracted, fully extended, and each intermediate normal operating position, as appropriate for the phase of flight.

(2) Landing gear. Retracted and extended as appropriate for the altitude.

(3) Cowl flaps. Appropriate to configuration.

(4) Spoilers/speedbrakes: Retracted and extended unless they have no measureable effect at low speeds.

(5) Power:

(i) Power/Thrust off; and

(ii) For reciprocating engine powered airplanes: 75 percent of maximum continuous power. However, if the power-to-weight ratio at 75 percent of maximum continuous power results in nose-high attitudes exceeding 30 degrees, the test may be carried out with the power required for level flight in the landing configuration at maximum landing weight and a speed of 1,4 VSO, except that the power may not be less than 50 percent of maximum continuous power; or

(iii) For turbine engine powered airplanes: The maximum engine thrust, except that it need not exceed the thrust necessary to maintain level flight at 1,5 VS1 (where VS1 corresponds to the stalling speed with flaps in the approach position, the landing gear retracted, and maximum landing weight).

(6) Trim: At 1,5 VS1 or the minimum trim speed, whichever is higher.

(e) Para aviões aprovados com máxima altitude operacional de 25.000 pés (7.620 metros) ou superior, durante a entrada e recuperação de estóis realizados em 25.000 pés (7.620 metros) ou mais, deve ser possível evitar pelo uso normal dos controles, rolamentos ou guinadas de mais que 25 graus.

(f) O cumprimento com os requisitos desta seção deve ser demonstrado sob as seguintes condições:

(1) Flapes das asas: recolhidos, totalmente estendidos, e toda posição intermediária de operação normal, conforme apropriado para a fase do voo;

(2) Trem de pouso: Recolhido e estendido, conforme apropriado para a altitude.

(3) Portinhola de refrigeração: Apropriadas à configuração.

(4) Spoilers/freios aerodinâmicos: Recolhidos e estendidos, a menos que não tenham efeito mensurável em baixa velocidade.

(5) Potência:

(i) Sem potência/tração; e

(ii) Para aviões propelidos por motor convencional: 75 por cento da potência máxima contínua. No entanto, se a relação potência-peso em 75 por cento da potência máxima contínua resulta em atitudes cabradas superiores a 30 graus, o ensaio pode ser realizado com a potência requerida para o voo nivelado na configuração de pouso, no peso máximo de pouso e uma velocidade de 1,4 VSO, exceto que a potência não pode ser inferior a 50 por cento da potência máxima contínua; ou

(iii) Para aviões com motores à turbina: A máxima tração do motor, exceto que não precisa exceder a tração necessária para manter voo nivelado a 1,5 VS1 (onde VS1 corresponde à velocidade de estol com flapes na posição de

(7) Propeller. Full increase r.p.m. position for the power off condition.	<p>aproximação, trem de pouso recolhido, e peso máximo de pouso).</p> <p>(6) Compensação: Em 1,5 VS1 ou na mínima velocidade de compensação, o que for maior.</p> <p>(7) Hélice: Posição de máxima rpm para a condição sem potência.</p>
---	--

[Doc. No. 27807, 61 FR 5191, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75755, Dec. 2, 2011]

<p>23.203 Turning flight and accelerated turning stalls.</p> <p>Turning flight and accelerated turning stalls must be demonstrated in tests as follows:</p> <p>(a) Establish and maintain a coordinated turn in a 30 degree bank. Reduce speed by steadily and progressively tightening the turn with the elevator until the airplane is stalled, as defined in paragraph 23.201(b). The rate of speed reduction must be constant, and:</p> <p>(1) For a turning flight stall, may not exceed one knot per second (0,5 m/s); and</p> <p>(2) For an accelerated turning stall, be 3 to 5 knots (1,5 to 2,6 m/s) per second with steadily increasing normal acceleration.</p> <p>(b) After the airplane has stalled, as defined in paragraph 23.201(b), it must be possible to regain wings level flight by normal use of the flight controls, but without increasing power and without:</p> <p>(1) Excessive loss of altitude;</p> <p>(2) Undue pitchup;</p> <p>(3) Uncontrollable tendency to spin;</p> <p>(4) Exceeding a bank angle of 60 degrees in the original direction of the turn or 30 degrees in the opposite direction in the case of turning flight stalls;</p>	<p>23.203 Estóis em curva e estóis em curva acelerada.</p> <p>Estóis em curva e estóis em curva acelerada devem ser demonstrados em ensaios, como segue:</p> <p>(a) Estabeleça e mantenha uma curva coordenada de 30 graus de inclinação. Reduza a velocidade apertando a curva constante e progressivamente utilizando o profundor até que o avião estole, como definido no parágrafo 23.201(b). A taxa de redução da velocidade deve ser constante, e:</p> <p>(1) Para estol em curva, não pode exceder um nó (0,5 m/s) por segundo; e</p> <p>(2) Para estol em curva acelerada, ser de 3 a 5 nós (1,5 a 2,6 m/s) por segundo com aumento constante de aceleração normal.</p> <p>(b) Após o avião ter estolado, como definido no parágrafo 23.201(b), deve ser possível recuperar o voo com asas niveladas pelo uso normal dos comandos de voo, mas sem aumentar a potência e sem:</p> <p>(1) Perda excessiva de altitude;</p> <p>(2) Cabragem indevida;</p> <p>(3) Tendência incontrolável de girar;</p> <p>(4) Exceder 60 graus de inclinação lateral no sentido original da curva ou 30 graus na</p>
--	--

<p>(5) Exceeding a bank angle of 90 degrees in the original direction of the turn or 60 degrees in the opposite direction in the case of accelerated turning stalls; and</p> <p>(6) Exceeding the maximum permissible speed or allowable limit load factor.</p> <p>(c) Compliance with the requirements of this section must be shown under the following conditions:</p> <p>(1) Wing flaps: Retracted, fully extended, and each intermediate normal operating position as appropriate for the phase of flight.</p> <p>(2) Landing gear: Retracted and extended as appropriate for the altitude.</p> <p>(3) Cowl flaps: Appropriate to configuration.</p> <p>(4) Spoilers/speedbrakes: Retracted and extended unless they have no measureable effect at low speeds.</p> <p>(5) Power:</p> <p>(i) Power/Thrust off; and</p> <p>(ii) For reciprocating engine powered airplanes: 75 percent of maximum continuous power. However, if the power-to-weight ratio at 75 percent of maximum continuous power results in nose-high attitudes exceeding 30 degrees, the test may be carried out with the power required for level flight in the landing configuration at maximum landing weight and a speed of 1,4 VSO, except that the power may not be less than 50 percent of maximum continuous power; or</p> <p>(iii) For turbine engine powered airplanes: The maximum engine thrust, except that it need not exceed the thrust necessary to maintain level flight at 1,5 V_{S1} (where V_{S1} corresponds to the stalling speed with flaps in the approach position, the landing gear retracted, and maximum landing weight).</p>	<p>direção oposta, no caso de estóis em curva;</p> <p>(5) Exceder 90 graus de inclinação lateral no sentido original da curva ou 60 graus na direção oposta, no caso de estóis em curva acelerada; e</p> <p>(6) Exceder a velocidade máxima permitida ou o fator de carga limite admissível.</p> <p>(c) O cumprimento com os requisitos desta seção deve ser demonstrado sob as seguintes condições:</p> <p>(1) Flapes das asas: Recolhidos, totalmente estendidos, e cada posição intermediária de operação normal conforme apropriado à fase de voo;</p> <p>(2) Trem de pouso: Recolhido e estendido conforme apropriado à altitude;</p> <p>(3) Portinhola de refrigeração: Apropriada à configuração;</p> <p>(4) Spoilers/freios aerodinâmicos: Recolhido e estendido a menos que tenham efeito não mensurável a baixas velocidades.</p> <p>(5) Potência:</p> <p>(i) Sem potência/tração; e</p> <p>(ii) Para aviões propelidos a motor convencional: 75 por cento da potência máxima contínua. No entanto, se a relação potência-peso em 75 por cento da potência máxima contínua resultar em atitudes cabradas excedendo 30 graus, o ensaio pode ser realizado com a potência requerida para o voo nivelado na configuração de pouso, no peso máximo de pouso e uma velocidade de 1,4 VSO, exceto que a potência não pode ser inferior a 50 por cento da potência máxima contínua; ou</p> <p>(iii) Para aviões com motores à turbina: A tração máxima do motor, exceto que isso não precisa exceder a tração necessária para manter</p>
--	---

<p>(6) Trim: The airplane trimmed at 1,5 V_{S1}.</p> <p>(7) Propeller. Full increase rpm position for the power off condition.</p>	<p>voo nivelado a 1,5 V_{S1} (onde V_{S1} corresponde a velocidade de estol com flapes na posição de aproximação, trem de pouso recolhido, e peso máximo de pouso).</p> <p>(6) Compensação: O avião compensado em 1,5 V_{S1}.</p> <p>(7) Hélice: Posição de máxima rpm para a condição sem potência.</p>
---	---

[Amdt. 23-14, 38 FR 31820, Nov. 19, 1973, as amended by Amdt. 23-45, 58 FR 42159, Aug. 6, 1993; Amdt. 23-50, 61 FR 5191, Feb. 9, 1996; Amdt. 23-62, 76 FR 75755, Dec. 2, 2011]

§ 23.207 Stall warning.

(a) There must be a clear and distinctive stall warning, with the flaps and landing gear in any normal position, in straight and turning flight.

(b) The stall warning may be furnished either through the inherent aerodynamic qualities of the airplane or by a device that will give clearly distinguishable indications under expected conditions of flight. However, a visual stall warning device that requires the attention of the crew within the cockpit is not acceptable by itself.

(c) During the stall tests required by §23.201(b) and §23.203(a)(1), the stall warning must begin at a speed exceeding the stalling speed by a margin of not less than 5 knots and must continue until the stall occurs.

(d) When following procedures furnished in accordance with §23.1585, the stall warning must not occur during a takeoff with all engines operating, a takeoff continued with one engine inoperative, or during an approach to landing.

(e) During the stall tests required by §23.203(a)(2), the stall warning must begin sufficiently in advance of the stall for the stall to be averted by pilot action taken after the stall warning first occurs.

(f) For acrobatic category airplanes, an artificial stall warning may be mutable, provided that it is armed automatically during takeoff and rearmed automatically in the approach configuration.

[Amdt. 23-7, 34 FR 13087, Aug. 13, 1969, as amended by Amdt. 23-45, 58 FR 42159, Aug. 6, 1993; Amdt. 23-50, 61 FR 5191, Feb. 9, 1996]

<p>23.221 Spinning.</p> <p>(a) Normal category airplanes. A single-engine, normal category airplane must be able to recover from a one-turn spin or a three-second spin, whichever takes longer, in not more than one additional turn after initiation of the first control action for recovery, or demonstrate</p>	<p>23.221 Parafuso.</p> <p>(a) Aviões da categoria normal. Um avião monomotor da categoria normal deve ser capaz de recuperar de um parafuso de uma volta ou de três segundos em parafuso, o que levar mais tempo, em não mais que uma volta adicional após o início da primeira ação nos controles</p>
--	--

<p>compliance with the optional spin resistant requirements of this section.</p> <p>(1) The following apply to one turn or three second spins:</p> <p>(i) For both the flaps-retracted and flaps-extended conditions, the applicable airspeed limit and positive limit maneuvering load factor must not be exceeded;</p> <p>(ii) No control forces or characteristic encountered during the spin or recovery may adversely affect prompt recovery;</p> <p>(iii) It must be impossible to obtain unrecoverable spins with any use of the flight or engine power controls either at the entry into or during the spin; and</p> <p>(iv) For the flaps-extended condition, the flaps may be retracted during the recovery but not before rotation has ceased.</p> <p>(2) At the applicant's option, the airplane may be demonstrated to be spin resistant by the following:</p> <p>(i) During the stall maneuver contained in section 23.201, the pitch control must be pulled back and held against the stop. Then, using ailerons and rudders in the proper direction, it must be possible to maintain wings-level flight within 15 degrees of bank and to roll the airplane from a 30 degree bank in one direction to a 30 degree bank in the other direction;</p> <p>(ii) Reduce the airplane speed using pitch control at a rate of approximately one knot per second (0,5 m/s) until the pitch control reaches the stop; then, with the pitch control pulled back and held against the stop, apply full rudder control in a manner to promote spin entry for a period of seven seconds or through a 360 degree heading change, whichever occurs first. If the 360 degree heading change is reached first, it must have taken no fewer than four seconds. This maneuver must be performed first with the ailerons in the neutral</p>	<p>para a recuperação, ou demonstrar cumprimento com os requisitos opcionais de resistência ao parafuso desta seção.</p> <p>(1) Aplica-se o seguinte aos parafusos de uma volta ou de três segundos:</p> <p>(i) Para as condições de flapes recolhidos e flapes estendidos, os limites de velocidade aerodinâmica e o limite positivo do fator de carga de manobra aplicáveis não podem ser excedidos;</p> <p>(ii) Nenhuma força nos controles ou característica encontrada durante o parafuso ou a recuperação pode afetar a recuperação imediata;</p> <p>(iii) Deve ser impossível desenvolver um parafuso irrecuperável através de qualquer uso dos comandos de voo ou de potência do motor seja durante a entrada ou durante o parafuso; e</p> <p>(iv) Para a condição de flapes estendidos, os flapes podem ser recolhidos durante a recuperação, mas não antes que a rotação tenha cessado.</p> <p>(2) Por opção do requerente, o avião pode ser demonstrado resistente ao parafuso, conforme o seguinte:</p> <p>(i) Durante a manobra de estol contida na seção 23.201, o controle de arfagem deve ser puxado para trás e segurado contra o batente. Então, usando ailerons e lemes na direção apropriada, deve ser possível manter o voo com asas nivelada dentro de 15 graus de inclinação e rolar o avião de 30 graus em uma direção a 30 graus na direção contrária;</p> <p>(ii) Reduzir a velocidade do avião usando o controle de arfagem a uma razão de aproximadamente um nó por segundo (0,5 m/s) até o controle de arfagem atingir o batente; então, com o controle de arfagem puxado para trás e segurado no batente, aplicar todo o controle do leme de modo a promover a entrada em parafuso por um período de sete</p>
---	---

position, and then with the ailerons deflected opposite the direction of turn in the most adverse manner. Power and airplane configuration must be set in accordance with paragraph 23.201(f) without change during the maneuver. At the end of seven seconds or a 360 degree heading change, the airplane must respond immediately and normally to primary flight controls applied to regain coordinated, unstalled flight without reversal of control effect and without exceeding the temporary control forces specified by paragraph 23.143(c); and

(iii) Compliance with sections 23.201 and 23.203 must be demonstrated with the airplane in uncoordinated flight, corresponding to one ball width displacement on a slip-skid indicator, unless one ball width displacement cannot be obtained with full rudder, in which case the demonstration must be with full rudder applied.

(b) Utility category airplanes. A utility category airplane must meet the requirements of paragraph (a) of this section. In addition, the requirements of paragraph (c) of this section and paragraph 23.807(b)(6) must be met if approval for spinning is requested.

(c) Acrobatic category airplanes. An acrobatic category airplane must meet the spin requirements of paragraph (a) of this section and paragraph 23.807(b)(5). In addition, the following requirements must be met in each configuration for which approval for spinning is requested:

(1) The airplane must recover from any point in a spin up to and including six turns, or any greater number of turns for which certification is requested, in not more than one and one-half additional turns after initiation of the first control action for recovery. However, beyond three turns, the spin may be discontinued if spiral characteristics appear.

(2) The applicable airspeed limits and limit maneuvering load factors must not be

segundos ou por uma mudança de 360 graus de proa, o que ocorrer primeiro. Se a mudança de 360 graus de proa for atingida primeiro, ela deve demorar mais que quatro segundos. Esta manobra deve ser realizada primeiramente com os ailerons na posição neutra, e depois com os ailerons defletidos no sentido oposto ao giro da maneira mais adversa. A potência e configuração do avião devem ser ajustadas de acordo com o parágrafo 23.201(e), sem alteração durante a manobra. Ao fim de sete segundos ou mudança de 360° de proa, o avião deve responder imediata e normalmente aos comandos primários de voo aplicados para recuperar o voo normal, coordenado, sem efeitos de reversão dos controles e sem exceder as forças nos controles temporárias especificadas pelo parágrafo 23.143(c); e

(iii) Cumprimento com as seções 23.201 e 23.203 deve ser demonstrado com o avião em voo descoordenado, correspondente ao deslocamento de um diâmetro da bola em um indicador de derrapagem, a menos que tal deslocamento não possa ser obtido com o leme no batente, caso em que a demonstração deve ser com deflexão total do leme aplicada.

(b) Aviões da categoria utilidade. Um avião da categoria utilidade deve atender aos requisitos do parágrafo (a) desta seção. Além disso, os requisitos do parágrafo (c) desta seção e parágrafo 23.807(b)(6) devem ser atendidos se a aprovação para parafuso é solicitada.

(c) Aviões da categoria acrobática. Um avião da categoria acrobática deve satisfazer os requisitos de parafuso do parágrafo (a) desta seção e parágrafo 23.807(b)(5). Além disso, os seguintes requisitos devem ser cumpridos em cada configuração para a qual aprovação para parafuso é solicitada:

(1) O avião deve recuperar em qualquer ponto de um parafuso de até e inclusive seis voltas, ou qualquer número maior de voltas para os quais a certificação é requerida, em não mais que uma e meia voltas adicionais após o início da primeira ação de controle para a

<p>exceeded. For flaps-extended configurations for which approval is requested, the flaps must not be retracted during the recovery.</p> <p>(3) It must be impossible to obtain unrecoverable spins with any use of the flight or engine power controls either at the entry into or during the spin.</p> <p>(4) There must be no characteristics during the spin (such as excessive rates of rotation or extreme oscillatory motion) that might prevent a successful recovery due to disorientation or incapacitation of the pilot.</p>	<p>recuperação. No entanto, após três voltas, o parafuso pode ser descontinuado se características de espiral aparecerem.</p> <p>(2) Os limites aplicáveis de velocidade e limites de fator de carga em manobra não podem ser excedidos. Para as configurações de flapes estendidos para os quais a aprovação é requerida, os flapes não podem ser recolhidos durante a recuperação.</p> <p>(3) Deve ser impossível desenvolver um parafuso irrecuperável através de qualquer uso dos comandos de voo ou de potência do motor seja durante a entrada ou durante o parafuso.</p> <p>(4) Não pode haver durante o parafuso características (tais como razões excessivas de rotação ou extremo movimento oscilatório) que poderiam impedir uma recuperação bem sucedida devido à desorientação ou incapacitação do piloto.</p>
---	---

[Doc. No. 27807, 61 FR 5191, Feb. 9, 1996]

Ground and Water Handling Characteristics

§ 23.231 Longitudinal stability and control.

(a) A landplane may have no uncontrollable tendency to nose over in any reasonably expected operating condition, including rebound during landing or takeoff. Wheel brakes must operate smoothly and may not induce any undue tendency to nose over.

(b) A seaplane or amphibian may not have dangerous or uncontrollable porpoising characteristics at any normal operating speed on the water.

§ 23.233 Directional stability and control.

(a) A 90 degree cross-component of wind velocity, demonstrated to be safe for taxiing, takeoff, and landing must be established and must be not less than $0.2 V_{SO}$.

(b) The airplane must be satisfactorily controllable in power-off landings at normal landing speed, without using brakes or engine power to maintain a straight path until the speed has decreased to at least 50 percent of the speed at touchdown.

(c) The airplane must have adequate directional control during taxiing.

(d) Seaplanes must demonstrate satisfactory directional stability and control for water operations up to the maximum wind velocity specified in paragraph (a) of this section.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42159, Aug. 6, 1993; Amdt. 23–50, 61 FR 5192, Feb. 9, 1996]

§ 23.235 Operation on unpaved surfaces.

The airplane must be demonstrated to have satisfactory characteristics and the shock-absorbing mechanism must not damage the structure of the airplane when the airplane is taxied on the roughest ground that may reasonably be expected in normal operation and when takeoffs and landings are performed on unpaved runways having the roughest surface that may reasonably be expected in normal operation.

[Doc. No. 27807, 61 FR 5192, Feb. 9, 1996]

§ 23.237 Operation on water.

A wave height, demonstrated to be safe for operation, and any necessary water handling procedures for seaplanes and amphibians must be established.

[Doc. No. 27807, 61 FR 5192, Feb. 9, 1996]

§ 23.239 Spray characteristics.

Spray may not dangerously obscure the vision of the pilots or damage the propellers or other parts of a seaplane or amphibian at any time during taxiing, takeoff, and landing.

Miscellaneous Flight Requirements

<p>23.251 Vibration and buffeting.</p> <p>(a) There must be no vibration or buffeting severe enough to result in structural damage, and each part of the airplane must be free from excessive vibration, under any appropriate speed and power conditions up to V_D/M_D, or V_{DF}/M_{DF} for jets. In addition, there must be no buffeting in any normal flight condition, including configuration changes during cruise, severe enough to interfere with the satisfactory control of the airplane or cause excessive fatigue to the flight crew. Stall warning buffeting within these limits is allowable.</p> <p>(b) There must be no perceptible buffeting condition in the cruise configuration in straight flight at any speed up to V_{MO}/M_{MO}, except stall buffeting, which is allowable.</p> <p>(c) For airplanes with M_D greater than M 0,6 or a maximum operating altitude greater than 25.000 feet (7.620 m), the positive</p>	<p>23.251 Vibração e buffeting.</p> <p>(a) Não pode haver vibração ou <i>buffeting</i> severos o suficiente para resultar em dano estrutural, e cada parte do avião deve estar livre de vibração excessiva, em quaisquer velocidade e condições de potência apropriadas até V_D/M_D, ou V_{DF}/M_{DF} para jatos. Adicionalmente, não pode haver <i>buffeting</i> em qualquer condição normal de voo, incluindo mudanças de configuração durante o cruzeiro, severo o suficiente para interferir com o controle satisfatório do avião ou causar fadiga para a tripulação. Um <i>buffeting</i> indicativo de estol dentro destes limites é permitido.</p> <p>(b) Não pode ser perceptível condição de <i>buffeting</i> na configuração de cruzeiro em voo reto em qualquer velocidade até a V_{MO}/M_{MO}, exceto <i>buffeting</i> de estol, que é permitido.</p> <p>(c) Para aviões com M_D maior que M 0,6 ou a altitude máxima de operação maior que 25.000</p>
--	--

maneuvering load factors at which the onset of perceptible buffeting occurs must be determined with the airplane in the cruise configuration for the ranges of airspeed or Mach number, weight, and altitude for which the airplane is to be certificated. The envelopes of load factor, speed, altitude, and weight must provide a sufficient range of speeds and load factors for normal operations. Probable inadvertent excursions beyond the boundaries of the buffet onset envelopes may not result in unsafe conditions.

pés (7.620 m), os fatores de carga de manobra positivos em que o limiar perceptível de *buffeting* ocorre devem ser determinados com o avião na configuração de cruzeiro para os intervalos de velocidade ou número MACH, peso, e altitude para os quais o avião deve ser certificado. Os envelopes de fator de carga, velocidade, altitude e peso devem prover um intervalo suficiente de velocidades e fatores de carga para operação normal. Prováveis excursões inadvertidas além dos limites dos envelopes de limiar do *buffet* não podem resultar em condições inseguras.

[Amdt. 23-62, 76 FR 75755, Dec. 2, 2011]

23.253 High speed characteristics.

If a maximum operating speed V_{MO}/M_{MO} is established under paragraph 23.1505(c), the following speed increase and recovery characteristics must be met:

(a) Operating conditions and characteristics likely to cause inadvertent speed increases (including upsets in pitch and roll) must be simulated with the airplane trimmed at any likely speed up to V_{MO}/M_{MO} . These conditions and characteristics include gust upsets, inadvertent control movements, low stick force gradients in relation to control friction, passenger movement, leveling off from climb, and descent from Mach to airspeed limit altitude.

(b) Allowing for pilot reaction time after occurrence of the effective inherent or artificial speed warning specified in section 23.1303, it must be shown that the airplane can be recovered to a normal attitude and its speed reduced to V_{MO}/M_{MO} , without:

- (1) Exceptional piloting strength or skill;
- (2) Exceeding V_D/M_D , or V_{DF}/M_{DF} for jets, the maximum speed shown under section 23.251, or the structural limitations; and
- (3) Buffeting that would impair the pilot's

23.253 Características de Alta Velocidade.

Se uma velocidade máxima operacional V_{MO}/M_{MO} é estabelecida pelo parágrafo 23.1505(c), as seguintes características de aumento de velocidades e recuperação devem ser cumpridas:

(a) Características e condições operacionais suscetíveis a causar aumentos de velocidade inadvertidos (incluindo perturbações em arfagem e rolamento) devem ser simuladas com o avião compensado em qualquer velocidade possível até V_{MO}/M_{MO} . Estas características e condições incluem perturbações de rajada, movimentos de controle inadvertidos, gradientes baixos de força no manche em relação ao atrito de controle, movimento de passageiro, nivelamento após subida, e descida de altitude de limite de Mach para altitude de limite de velocidade aerodinâmica.

(b) Considerando o tempo de reação do piloto após a ocorrência do alarme inerente efetivo ou artificial de velocidade, especificado na seção 23.1303, deve ser demonstrado que o avião pode ser recuperado para uma atitude normal e sua velocidade reduzida para V_{MO}/M_{MO} , sem:

- (1) Esforço ou habilidade de pilotagem excepcional;

<p>ability to read the instruments or to control the airplane for recovery.</p> <p>(c) There may be no control reversal about any axis at any speed up to the maximum speed shown under section 23.251. Any reversal of elevator control force or tendency of the airplane to pitch, roll, or yaw must be mild and readily controllable, using normal piloting techniques.</p> <p>(d) Maximum speed for stability characteristics, V_{FC}/M_{FC}. V_{FC}/M_{FC} may not be less than a speed midway between V_{MO}/M_{MO} and V_{DF}/M_{DF} except that, for altitudes where Mach number is the limiting factor, M_{FC} need not exceed the Mach number at which effective speed warning occurs.</p>	<p>(2) Exceder V_D/M_D, ou V_{DF}/M_{DF} para jatos, a velocidade máxima demonstrada pela seção 23.251, ou as limitações estruturais; e</p> <p>(3) <i>Buffeting</i> que prejudicaria a habilidade do piloto em ler os instrumentos ou controlar o avião para recuperação.</p> <p>(c) Não pode haver reversão de controle em qualquer eixo em qualquer velocidade até a velocidade máxima demonstrada na seção 23.251. Qualquer reversão da força de controle do profundor ou tendência do avião de arfar, rolar, ou guinar deve ser leve e rapidamente controlável, usando técnicas de pilotagem normais.</p> <p>(d) Velocidade máxima para características de estabilidade, V_{FC}/M_{FC}. V_{FC}/M_{FC} não pode ser menos que a velocidade média entre V_{MO}/M_{MO} e V_{DF}/M_{DF} exceto que, para altitudes onde o número MACH é o fator limitante, M_{FC} não precisa exceder o número MACH em que o aviso efetivo de velocidade ocorre.</p>
---	---

[Amdt. 23-7, 34 FR 13087, Aug. 13, 1969, as amended by Amdt. 23-26, 45 FR 60170, Sept. 11, 1980; Amdt. 23-45, 58 FR 42160, Aug. 6, 1993; Amdt. 23-50, 61 FR 5192, Feb. 9, 1996; Amdt. 23-62, 76 FR 75755, Dec. 2, 2011]

<p>23.255 Out of trim characteristics.</p> <p>For airplanes with an M_D greater than M 0.6 and that incorporate a trimmable horizontal stabilizer, the following requirements for out-of-trim characteristics apply:</p> <p>(a) From an initial condition with the airplane trimmed at cruise speeds up to V_{MO}/M_{MO}, the airplane must have satisfactory maneuvering stability and controllability with the degree of out-of-trim in both the airplane nose-up and nose-down directions, which results from the greater of the following:</p> <p>(1) A three-second movement of the longitudinal trim system at its normal rate for the particular flight condition with no aerodynamic load (or an equivalent degree of trim for airplanes that do not have a power-</p>	<p>23.255 Características da condição descompensada.</p> <p>Para aviões com M_D maior do que M0,6 e que incorporem um estabilizador horizontal compensável, os seguintes requisitos para características da condição descompensada se aplicam:</p> <p>(a) A partir de uma condição inicial com o avião compensado nas velocidades de cruzeiro até a V_{MO}/M_{MO}, o avião deve ter estabilidade de manobra e controlabilidade satisfatórias no maior ajuste descompensado em ambas as direções cabrada e picada, que resulte do maior dentre os seguintes:</p> <p>(1) Um movimento de 3 segundos do sistema de compensação longitudinal em sua taxa normal para a condição de voo particular sem</p>
---	--

operated trim system), except as limited by stops in the trim system, including those required by paragraph 23.655(b) for adjustable stabilizers; or

(2) The maximum mistrim that can be sustained by the autopilot while maintaining level flight in the high speed cruising condition.

(b) In the out-of-trim condition specified in paragraph (a) of this section, when the normal acceleration is varied from +1 g to the positive and negative values specified in paragraph (c) of this section, the following apply:

(1) The stick force versus g curve must have a positive slope at any speed up to and including V_{FC}/M_{FC}; and

(2) At speeds between V_{FC}/M_{FC} and V_{DF}/M_{DF}, the direction of the primary longitudinal control force may not reverse.

(c) Except as provided in paragraphs (d) and (e) of this section, compliance with the provisions of paragraph (a) of this section must be demonstrated in flight over the acceleration range as follows:

(1) -1 g to +2.5 g; or

(2) 0 g to 2.0 g, and extrapolating by an acceptable method to -1 g and +2.5 g.

(d) If the procedure set forth in paragraph (c)(2) of this section is used to demonstrate compliance and marginal conditions exist during flight test with regard to reversal of primary longitudinal control force, flight tests must be accomplished from the normal acceleration at which a marginal condition is found to exist to the applicable limit specified in paragraph (b)(1) of this section.

(e) During flight tests required by paragraph (a) of this section, the limit maneuvering load factors, prescribed in paragraph 23.333(b) and section 23.337, need not be exceeded. In

carga aerodinâmica (ou um ajuste equivalente de compensação para aviões que não tenham um sistema de compensação elétrico), exceto quando limitado por batentes no sistema de compensação, incluindo aqueles requeridos pelo parágrafo 23.655(b) para estabilizadores ajustáveis; ou

(2) A máxima condição descompensada que possa ser suportada pelo piloto automático mantendo voo nivelado na condição de voo de cruzeiro em velocidade alta.

(b) Na condição descompensada especificada no parágrafo (a) desta seção, quando a aceleração normal é variada de +1 g para os valores positivos e negativos especificados no parágrafo (c) desta seção, o seguinte se aplica:

(1) A curva de força no manche versus g deve ter um gradiente positivo em qualquer velocidade até e incluindo a V_{FC}/M_{FC}; e

(2) Em velocidades entre a V_{FC}/M_{FC} e V_{DF}/M_{DF} a direção da força de controle longitudinal primário não pode reverter.

(c) Exceto quando providenciado como nos parágrafos (d) e (e) desta seção, o cumprimento com o requerido no parágrafo (a) desta seção deve ser demonstrado em voo no intervalo de aceleração como segue:

(1) -1 g a +2,5 g; ou

(2) 0 g a 2,0 g, e extrapolando por um método aceitável para -1 g e +2,5 g.

(d) Se o procedimento estabelecido no parágrafo (c)(2) desta seção é usado para demonstrar cumprimento e há condições marginais durante os ensaios em voo com relação a reversão da força de controle longitudinal primário, devem ser executados ensaios em voo a partir da aceleração normal em que a condição marginal foi encontrada até o limite aplicável especificado no parágrafo (b)(1) desta seção.

addition, the entry speeds for flight test demonstrations at normal acceleration values less than 1 g must be limited to the extent necessary to accomplish a recovery without exceeding V_{DF}/M_{DF} .

(f) In the out-of-trim condition specified in paragraph (a) of this section, it must be possible from an overspeed condition at V_{DF}/M_{DF} to produce at least 1.5 g for recovery by applying not more than 125 pounds of longitudinal control force using either the primary longitudinal control alone or the primary longitudinal control and the longitudinal trim system. If the longitudinal trim is used to assist in producing the required load factor, it must be shown at V_{DF}/M_{DF} that the longitudinal trim can be actuated in the airplane nose-up direction with the primary surface loaded to correspond to the least of the following airplane nose-up control forces:

(1) The maximum control forces expected in service, as specified in sections 23.301 and 23.397.

(2) The control force required to produce 1.5 g.

(3) The control force corresponding to buffeting or other phenomena of such intensity that it is a strong deterrent to further application of primary longitudinal control force.

(e) Durante os ensaios em voo requeridos no parágrafo (a) desta seção, os fatores de carga de manobra limites prescritos no parágrafo 23.333(b) e na seção 23.337 não necessitam ser excedidos. Adicionalmente, as velocidades de ingresso nas demonstrações de ensaio em voo em valores de aceleração normal menores que 1g devem ser limitadas na extensão necessária para o cumprimento da recuperação sem exceder a V_{DF}/M_{DF} .

(f) Na condição descompensada especificada no parágrafo (a) desta seção, deve ser possível produzir pelo menos 1,5 g para recuperação de uma condição de velocidade excessiva na V_{DF}/M_{DF} aplicando não mais que 125 libras (556 N) de força de controle longitudinal usando somente o controle longitudinal primário ou o controle longitudinal primário e o sistema de compensação longitudinal. Se o sistema de compensação longitudinal for usado para ajudar na obtenção do fator de carga requerido, deve ser demonstrado na V_{DF}/M_{DF} que o compensador longitudinal pode ser atuado na direção do nariz do avião a cabrar com a superfície primária carregada com o correspondente à menor das forças de controle para nariz do avião a cabrar:

(1) As forças de controle máximas esperadas em serviço como especificado nas seções 23.301 e 23.397.

(2) A força de controle requerida para produzir 1,5 g.

(3) A força de controle correspondente ao “buffeting” ou outros fenômenos de tal intensidade que seja um forte impedimento ao aumento da força de controle longitudinal primário.

[Doc. No. FAA-2009-0738, 76 FR 75755, Dec. 2, 2011]

Subpart C—Structure

General

§ 23.301 Loads.

(a) Strength requirements are specified in terms of limit loads (the maximum loads to be expected in service) and ultimate loads (limit loads multiplied by prescribed factors of safety). Unless otherwise provided, prescribed loads are limit loads.

(b) Unless otherwise provided, the air, ground, and water loads must be placed in equilibrium with inertia forces, considering each item of mass in the airplane. These loads must be distributed to conservatively approximate or closely represent actual conditions. Methods used to determine load intensities and distribution on canard and tandem wing configurations must be validated by flight test measurement unless the methods used for determining those loading conditions are shown to be reliable or conservative on the configuration under consideration.

(c) If deflections under load would significantly change the distribution of external or internal loads, this redistribution must be taken into account.

(d) Simplified structural design criteria may be used if they result in design loads not less than those prescribed in §§23.331 through 23.521. For airplane configurations described in appendix A, §23.1, the design criteria of appendix A of this part are an approved equivalent of §§23.321 through 23.459. If appendix A of this part is used, the entire appendix must be substituted for the corresponding sections of this part.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–28, 47 FR 13315, Mar. 29, 1982; Amdt. 23–42, 56 FR 352, Jan. 3, 1991; Amdt. 23–48, 61 FR 5143, Feb. 9, 1996]

§ 23.302 Canard or tandem wing configurations.

The forward structure of a canard or tandem wing configuration must:

- (a) Meet all requirements of subpart C and subpart D of this part applicable to a wing; and
- (b) Meet all requirements applicable to the function performed by these surfaces.

[Amdt. 23–42, 56 FR 352, Jan. 3, 1991]

§ 23.303 Factor of safety.

Unless otherwise provided, a factor of safety of 1.5 must be used.

§ 23.305 Strength and deformation.

(a) The structure must be able to support limit loads without detrimental, permanent deformation. At any load up to limit loads, the deformation may not interfere with safe operation.

(b) The structure must be able to support ultimate loads without failure for at least three seconds, except local failures or structural instabilities between limit and ultimate load are acceptable only if the structure can sustain the required ultimate load for at least three seconds. However when proof of strength is shown by dynamic tests simulating actual load conditions, the three second limit does not apply.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.307 Proof of structure.

(a) Compliance with the strength and deformation requirements of §23.305 must be shown for each critical load condition. Structural analysis may be used only if the structure conforms to those for which experience has shown this method to be reliable. In other cases, substantiating load tests must be made. Dynamic tests, including structural flight tests, are acceptable if the design load conditions have been simulated.

(b) Certain parts of the structure must be tested as specified in Subpart D of this part.

Flight Loads

§ 23.321 General.

(a) Flight load factors represent the ratio of the aerodynamic force component (acting normal to the assumed longitudinal axis of the airplane) to the weight of the airplane. A positive flight load factor is one in which the aerodynamic force acts upward, with respect to the airplane.

(b) Compliance with the flight load requirements of this subpart must be shown—

(1) At each critical altitude within the range in which the airplane may be expected to operate;

(2) At each weight from the design minimum weight to the design maximum weight; and

(3) For each required altitude and weight, for any practicable distribution of disposable load within the operating limitations specified in §§23.1583 through 23.1589.

(c) When significant, the effects of compressibility must be taken into account.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.331 Symmetrical flight conditions.

(a) The appropriate balancing horizontal tail load must be accounted for in a rational or conservative manner when determining the wing loads and linear inertia loads corresponding to any of the symmetrical flight conditions specified in §§23.333 through 23.341.

(b) The incremental horizontal tail loads due to maneuvering and gusts must be reacted by the angular inertia of the airplane in a rational or conservative manner.

(c) Mutual influence of the aerodynamic surfaces must be taken into account when determining flight loads.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–42, 56 FR 352, Jan. 3, 1991]

§ 23.333 Flight envelope.

(a) General. Compliance with the strength requirements of this subpart must be shown at any combination of airspeed and load factor on and within the boundaries of a flight envelope (similar to the one in paragraph (d) of this section) that represents the envelope of the flight loading conditions specified by the maneuvering and gust criteria of paragraphs (b) and (c) of this section respectively.

(b) Maneuvering envelope. Except where limited by maximum (static) lift coefficients, the airplane is assumed to be subjected to symmetrical maneuvers resulting in the following limit load factors:

- (1) The positive maneuvering load factor specified in §23.337 at speeds up to V D;
- (2) The negative maneuvering load factor specified in §23.337 at V C; and
- (3) Factors varying linearly with speed from the specified value at V C to 0.0 at V D for the normal and commuter category, and -1.0 at V D for the acrobatic and utility categories.

(c) Gust envelope. (1) The airplane is assumed to be subjected to symmetrical vertical gusts in level flight. The resulting limit load factors must correspond to the conditions determined as follows:

- (i) Positive (up) and negative (down) gusts of 50 f.p.s. at V C must be considered at altitudes between sea level and 20,000 feet. The gust velocity may be reduced linearly from 50 f.p.s. at 20,000 feet to 25 f.p.s. at 50,000 feet.
- (ii) Positive and negative gusts of 25 f.p.s. at V D must be considered at altitudes between sea level and 20,000 feet. The gust velocity may be reduced linearly from 25 f.p.s. at 20,000 feet to 12.5 f.p.s. at 50,000 feet.
- (iii) In addition, for commuter category airplanes, positive (up) and negative (down) rough air gusts of 66 f.p.s. at V B must be considered at altitudes between sea level and 20,000 feet. The gust velocity may be reduced linearly from 66 f.p.s. at 20,000 feet to 38 f.p.s. at 50,000 feet.

(2) The following assumptions must be made:

- (i) The shape of the gust is—

$$U = \frac{U_{de}}{2} \left(1 - \cos \frac{2\pi s}{25C} \right)$$


Where—

s = Distance penetrated into gust (ft.);

C = Mean geometric chord of wing (ft.); and

U_{de} = Derived gust velocity referred to in subparagraph (1) of this section.

- (ii) Gust load factors vary linearly with speed between V C and V D.
- (d) Flight envelope.

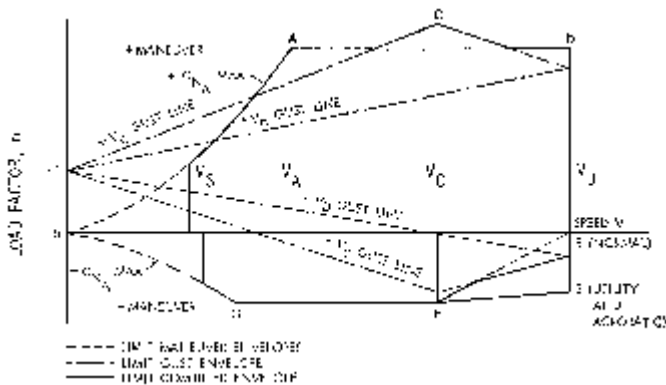

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13087, Aug. 13, 1969; Amdt. 23-34, 52 FR 1829, Jan. 15, 1987]

§ 23.335 Design airspeeds.

Except as provided in paragraph (a)(4) of this section, the selected design airspeeds are equivalent airspeeds (EAS).

(a) Design cruising speed, V C. For V C the following apply:

(1) Where W/S' = wing loading at the design maximum takeoff weight, V_c (in knots) may not be less than—

- (i) $33 \sqrt{W/S}$ (for normal, utility, and commuter category airplanes);
- (ii) $36 \sqrt{W/S}$ (for acrobatic category airplanes).

(2) For values of W/S more than 20, the multiplying factors may be decreased linearly with W/S to a value of 28.6 where $W/S = 100$.

(3) V_C need not be more than $0.9 V_{H}$ at sea level.

(4) At altitudes where an M_D is established, a cruising speed M_C limited by compressibility may be selected.

(b) Design dive speed V D. For V D, the following apply:

(1) V_D/M_D may not be less than $1.25 V_C/M_C$; and

(2) With V_C min, the required minimum design cruising speed, V D (in knots) may not be less than—

- (i) $1.40 V_{c \min}$ (for normal and commuter category airplanes);

(ii) $1.50 V_C$ min(for utility category airplanes); and

(iii) $1.55 V_C$ min(for acrobatic category airplanes).

(3) For values of W/S more than 20, the multiplying factors in paragraph (b)(2) of this section may be decreased linearly with W/S to a value of 1.35 where $W/S = 100$.

(4) Compliance with paragraphs (b)(1) and (2) of this section need not be shown if $V_{D/M_{Dis}}$ is selected so that the minimum speed margin between V_C/M_C and $V_{D/M_{Dis}}$ is the greater of the following:

(i) The speed increase resulting when, from the initial condition of stabilized flight at V_C/M_C , the airplane is assumed to be upset, flown for 20 seconds along a flight path 7.5° below the initial path, and then pulled up with a load factor of 1.5 (0.5 g. acceleration increment). At least 75 percent maximum continuous power for reciprocating engines, and maximum cruising power for turbines, or, if less, the power required for V_C/M_C for both kinds of engines, must be assumed until the pullup is initiated, at which point power reduction and pilot-controlled drag devices may be used; and either—

(ii) Mach 0.05 for normal, utility, and acrobatic category airplanes (at altitudes where M_{Dis} is established); or

(iii) Mach 0.07 for commuter category airplanes (at altitudes where M_{Dis} is established) unless a rational analysis, including the effects of automatic systems, is used to determine a lower margin. If a rational analysis is used, the minimum speed margin must be enough to provide for atmospheric variations (such as horizontal gusts), and the penetration of jet streams or cold fronts), instrument errors, airframe production variations, and must not be less than Mach 0.05.

(c) Design maneuvering speed V_A . For V_A , the following applies:

(1) V_A may not be less than $V_S \sqrt{n}$ where—

(i) V_S is a computed stalling speed with flaps retracted at the design weight, normally based on the maximum airplane normal force coefficients, C_{NA} ; and

(ii) n is the limit maneuvering load factor used in design

(2) The value of V_A need not exceed the value of V_C used in design.

(d) Design speed for maximum gust intensity, V_B . For V_B , the following apply:

(1) V_B may not be less than the speed determined by the intersection of the line representing the maximum positive lift, C_{NMAX} , and the line representing the rough air gust velocity on the gust $V-n$ diagram, or $V_{S1} \sqrt{n_g}$, whichever is less, where:

(i) n_g the positive airplane gust load factor due to gust, at speed V_C (in accordance with §23.341), and at the particular weight under consideration; and

(ii) V_{S1} is the stalling speed with the flaps retracted at the particular weight under consideration.

(2) V_B need not be greater than V_C .

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13088, Aug. 13, 1969; Amdt. 23–16, 40 FR 2577, Jan. 14, 1975; Amdt. 23–34, 52 FR 1829, Jan. 15, 1987; Amdt. 23–24, 52 FR 34745, Sept. 14, 1987; Amdt. 23–48, 61 FR 5143, Feb. 9, 1996]

§ 23.337 Limit maneuvering load factors.

(a) The positive limit maneuvering load factor n may not be less than—

(1) $2.1 + (24,000 \div (W + 10,000))$ for normal and commuter category airplanes, where W = design maximum takeoff weight, except that n need not be more than 3.8;

(2) 4.4 for utility category airplanes; or

(3) 6.0 for acrobatic category airplanes.

(b) The negative limit maneuvering load factor may not be less than—

(1) 0.4 times the positive load factor for the normal utility and commuter categories; or

(2) 0.5 times the positive load factor for the acrobatic category.

(c) Maneuvering load factors lower than those specified in this section may be used if the airplane has design features that make it impossible to exceed these values in flight.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13088, Aug. 13, 1969; Amdt. 23–34, 52 FR 1829, Jan. 15, 1987; Amdt. 23–48, 61 FR 5144, Feb. 9, 1996]

§ 23.341 Gust loads factors.

(a) Each airplane must be designed to withstand loads on each lifting surface resulting from gusts specified in §23.333(c).

(b) The gust load for a canard or tandem wing configuration must be computed using a rational analysis, or may be computed in accordance with paragraph (c) of this section, provided that the resulting net loads are shown to be conservative with respect to the gust criteria of §23.333(c).

(c) In the absence of a more rational analysis, the gust load factors must be computed as follows—

$$n = 1 + \frac{K_g U_a V_a}{498 (W/S)}$$

Where—

$K_g = 0.88 \mu_g / 5.3 + \mu_g$ = gust alleviation factor;

$\mu_g = 2(W/S) / \rho C_{ag}$ = airplane mass ratio;

U de=Derived gust velocities referred to in §23.333(c) (f.p.s.);

ρ =Density of air (slugs/cu.ft.);

W/S =Wing loading (p.s.f.) due to the applicable weight of the airplane in the particular load case.

W/S =Wing loading (p.s.f.);

C =Mean geometric chord (ft.);

g =Acceleration due to gravity (ft./sec.²)

V =Airplane equivalent speed (knots); and

a =Slope of the airplane normal force coefficient curve C_{NA} per radian if the gust loads are applied to the wings and horizontal tail surfaces simultaneously by a rational method. The wing lift curve slope C_{L} per radian may be used when the gust load is applied to the wings only and the horizontal tail gust loads are treated as a separate condition.

[Amdt. 23–7, 34 FR 13088, Aug. 13, 1969, as amended by Amdt. 23–42, 56 FR 352, Jan. 3, 1991; Amdt. 23–48, 61 FR 5144, Feb. 9, 1996]

§ 23.343 Design fuel loads.

(a) The disposable load combinations must include each fuel load in the range from zero fuel to the selected maximum fuel load.

(b) If fuel is carried in the wings, the maximum allowable weight of the airplane without any fuel in the wing tank(s) must be established as “maximum zero wing fuel weight,” if it is less than the maximum weight.

(c) For commuter category airplanes, a structural reserve fuel condition, not exceeding fuel necessary for 45 minutes of operation at maximum continuous power, may be selected. If a structural reserve fuel condition is selected, it must be used as the minimum fuel weight condition for showing compliance with the flight load requirements prescribed in this part and—

(1) The structure must be designed to withstand a condition of zero fuel in the wing at limit loads corresponding to:

(i) Ninety percent of the maneuvering load factors defined in §23.337, and

(ii) Gust velocities equal to 85 percent of the values prescribed in §23.333(c).

(2) The fatigue evaluation of the structure must account for any increase in operating stresses resulting from the design condition of paragraph (c)(1) of this section.

(3) The flutter, deformation, and vibration requirements must also be met with zero fuel in the wings.

[Doc. No. 27805, 61 FR 5144, Feb. 9, 1996]

§ 23.345 High lift devices.

(a) If flaps or similar high lift devices are to be used for takeoff, approach or landing, the airplane, with the flaps fully extended at V_F , is assumed to be subjected to symmetrical maneuvers and gusts within the range determined by—

- (1) Maneuvering, to a positive limit load factor of 2.0; and
- (2) Positive and negative gust of 25 feet per second acting normal to the flight path in level flight.

(b) V_F must be assumed to be not less than $1.4 V_S$ or $1.8 V_{SF}$, whichever is greater, where—

(1) V_S is the computed stalling speed with flaps retracted at the design weight; and

(2) V_{SF} is the computed stalling speed with flaps fully extended at the design weight.

(3) If an automatic flap load limiting device is used, the airplane may be designed for the critical combinations of airspeed and flap position allowed by that device.

(c) In determining external loads on the airplane as a whole, thrust, slipstream, and pitching acceleration may be assumed to be zero.

(d) The flaps, their operating mechanism, and their supporting structures, must be designed to withstand the conditions prescribed in paragraph (a) of this section. In addition, with the flaps fully extended at V_F , the following conditions, taken separately, must be accounted for:

(1) A head-on gust having a velocity of 25 feet per second (EAS), combined with propeller slipstream corresponding to 75 percent of maximum continuous power; and

(2) The effects of propeller slipstream corresponding to maximum takeoff power.

[Doc. No. 27805, 61 FR 5144, Feb. 9, 1996]

§ 23.347 Unsymmetrical flight conditions.

(a) The airplane is assumed to be subjected to the unsymmetrical flight conditions of §§23.349 and 23.351. Unbalanced aerodynamic moments about the center of gravity must be reacted in a rational or conservative manner, considering the principal masses furnishing the reacting inertia forces.

(b) Acrobatic category airplanes certified for flick maneuvers (snap roll) must be designed for additional asymmetric loads acting on the wing and the horizontal tail.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5144, Feb. 9, 1996]

§ 23.349 Rolling conditions.

The wing and wing bracing must be designed for the following loading conditions:

(a) Unsymmetrical wing loads appropriate to the category. Unless the following values result in unrealistic loads, the rolling accelerations may be obtained by modifying the symmetrical flight conditions in §23.333(d) as follows:

(1) For the acrobatic category, in conditions A and F, assume that 100 percent of the semispan wing airload acts on one side of the plane of symmetry and 60 percent of this load acts on the other side.

(2) For normal, utility, and commuter categories, in Condition A, assume that 100 percent of the semispan wing airload acts on one side of the airplane and 75 percent of this load acts on the other side.

(b) The loads resulting from the aileron deflections and speeds specified in §23.455, in combination with an airplane load factor of at least two thirds of the positive maneuvering load factor used for design. Unless the following values result in unrealistic loads, the effect of aileron displacement on wing torsion may be accounted for by adding the following increment to the basic airfoil moment coefficient over the aileron portion of the span in the critical condition determined in §23.333(d):

$$\Delta c_m = -0.01\delta$$

where—

Δc_m is the moment coefficient increment; and

δ is the down aileron deflection in degrees in the critical condition.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13088, Aug. 13, 1969; Amdt. 23–34, 52 FR 1829, Jan. 15, 1987; Amdt. 23–48, 61 FR 5144, Feb. 9, 1996]

§ 23.351 Yawing conditions.

The airplane must be designed for yawing loads on the vertical surfaces resulting from the loads specified in §§23.441 through 23.445.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–42, 56 FR 352, Jan. 3, 1991]

§ 23.361 Engine torque.

(a) Each engine mount and its supporting structure must be designed for the effects of—

(1) A limit engine torque corresponding to takeoff power and propeller speed acting simultaneously with 75 percent of the limit loads from flight condition A of §23.333(d);

(2) A limit engine torque corresponding to maximum continuous power and propeller speed acting simultaneously with the limit loads from flight condition A of §23.333(d); and

(3) For turbopropeller installations, in addition to the conditions specified in paragraphs (a)(1) and (a)(2) of this section, a limit engine torque corresponding to takeoff power and propeller speed, multiplied by a factor accounting for propeller control system malfunction, including quick feathering, acting simultaneously with 1g level flight loads. In the absence of a rational analysis, a factor of 1.6 must be used.

(b) For turbine engine installations, the engine mounts and supporting structure must be designed to withstand each of the following:

(1) A limit engine torque load imposed by sudden engine stoppage due to malfunction or structural failure (such as compressor jamming).

(2) A limit engine torque load imposed by the maximum acceleration of the engine.

(c) The limit engine torque to be considered under paragraph (a) of this section must be obtained by multiplying the mean torque by a factor of—

(1) 1.25 for turbopropeller installations;

(2) 1.33 for engines with five or more cylinders; and

(3) Two, three, or four, for engines with four, three, or two cylinders, respectively.

[Amdt. 23–26, 45 FR 60171, Sept. 11, 1980, as amended by Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.363 Side load on engine mount.

(a) Each engine mount and its supporting structure must be designed for a limit load factor in a lateral direction, for the side load on the engine mount, of not less than—

(1) 1.33, or

(2) One-third of the limit load factor for flight condition A.

(b) The side load prescribed in paragraph (a) of this section may be assumed to be independent of other flight conditions.

§ 23.365 Pressurized cabin loads.

For each pressurized compartment, the following apply:

(a) The airplane structure must be strong enough to withstand the flight loads combined with pressure differential loads from zero up to the maximum relief valve setting.

(b) The external pressure distribution in flight, and any stress concentrations, must be accounted for.

(c) If landings may be made with the cabin pressurized, landing loads must be combined with pressure differential loads from zero up to the maximum allowed during landing.

(d) The airplane structure must be strong enough to withstand the pressure differential loads corresponding to the maximum relief valve setting multiplied by a factor of 1.33, omitting other loads.

(e) If a pressurized cabin has two or more compartments separated by bulkheads or a floor, the primary structure must be designed for the effects of sudden release of pressure in any compartment with external doors or windows. This condition must be investigated for the effects of failure of the largest opening in the compartment. The effects of intercompartmental venting may be considered.

§ 23.367 Unsymmetrical loads due to engine failure.

(a) Turbopropeller airplanes must be designed for the unsymmetrical loads resulting from the failure of the critical engine including the following conditions in combination with a single malfunction of the propeller drag limiting system, considering the probable pilot corrective action on the flight controls:

(1) At speeds between V_{MC} and V_D , the loads resulting from power failure because of fuel flow interruption are considered to be limit loads.

(2) At speeds between V_{MC} and V_C , the loads resulting from the disconnection of the engine compressor from the turbine or from loss of the turbine blades are considered to be ultimate loads.

(3) The time history of the thrust decay and drag buildup occurring as a result of the prescribed engine failures must be substantiated by test or other data applicable to the particular engine-propeller combination.

(4) The timing and magnitude of the probable pilot corrective action must be conservatively estimated, considering the characteristics of the particular engine-propeller-airplane combination.

(b) Pilot corrective action may be assumed to be initiated at the time maximum yawing velocity is reached, but not earlier than 2 seconds after the engine failure. The magnitude of the corrective action may be based on the limit pilot forces specified in §23.397 except that lower forces may be assumed where it is shown by analysis or test that these forces can control the yaw and roll resulting from the prescribed engine failure conditions.

[Amdt. 23-7, 34 FR 13089, Aug. 13, 1969]

§ 23.369 Rear lift truss.

(a) If a rear lift truss is used, it must be designed to withstand conditions of reversed airflow at a design speed of—

$V = 8.7 \sqrt{(W/S)} + 8.7$ (knots), where W/S = wing loading at design maximum takeoff weight.

(b) Either aerodynamic data for the particular wing section used, or a value of C_L equalling -0.8 with a chordwise distribution that is triangular between a peak at the trailing edge and zero at the leading edge, must be used.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13089, Aug. 13,

1969; 34 FR 17509, Oct. 30, 1969; Amdt. 23–45, 58 FR 42160, Aug. 6, 1993; Amdt. 23–48, 61 FR 5145, Feb. 9, 1996]

§ 23.371 Gyroscopic and aerodynamic loads.

(a) Each engine mount and its supporting structure must be designed for the gyroscopic, inertial, and aerodynamic loads that result, with the engine(s) and propeller(s), if applicable, at maximum continuous r.p.m., under either:

(1) The conditions prescribed in §23.351 and §23.423; or

(2) All possible combinations of the following—

(i) A yaw velocity of 2.5 radians per second;

(ii) A pitch velocity of 1.0 radian per second;

(iii) A normal load factor of 2.5; and

(iv) Maximum continuous thrust.

(b) For airplanes approved for aerobatic maneuvers, each engine mount and its supporting structure must meet the requirements of paragraph (a) of this section and be designed to withstand the load factors expected during combined maximum yaw and pitch velocities.

(c) For airplanes certificated in the commuter category, each engine mount and its supporting structure must meet the requirements of paragraph (a) of this section and the gust conditions specified in §23.341 of this part.

[Doc. No. 27805, 61 FR 5145, Feb. 9, 1996]

§ 23.373 Speed control devices.

If speed control devices (such as spoilers and drag flaps) are incorporated for use in enroute conditions—

(a) The airplane must be designed for the symmetrical maneuvers and gusts prescribed in §§23.333, 23.337, and 23.341, and the yawing maneuvers and lateral gusts in §§23.441 and 23.443, with the device extended at speeds up to the placard device extended speed; and

(b) If the device has automatic operating or load limiting features, the airplane must be designed for the maneuver and gust conditions prescribed in paragraph (a) of this section at the speeds and corresponding device positions that the mechanism allows.

[Amdt. 23–7, 34 FR 13089, Aug. 13, 1969]

Control Surface and System Loads

§ 23.391 Control surface loads.

The control surface loads specified in §§23.397 through 23.459 are assumed to occur in the conditions described in §§23.331 through 23.351.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5145, Feb. 9, 1996]

§ 23.393 Loads parallel to hinge line.

(a) Control surfaces and supporting hinge brackets must be designed to withstand inertial loads acting parallel to the hinge line.

(b) In the absence of more rational data, the inertial loads may be assumed to be equal to KW , where—

- (1) $K=24$ for vertical surfaces;
- (2) $K=12$ for horizontal surfaces; and
- (3) W =weight of the movable surfaces.

[Doc. No. 27805, 61 FR 5145, Feb. 9, 1996]

§ 23.395 Control system loads.

(a) Each flight control system and its supporting structure must be designed for loads corresponding to at least 125 percent of the computed hinge moments of the movable control surface in the conditions prescribed in §§23.391 through 23.459. In addition, the following apply:

(1) The system limit loads need not exceed the higher of the loads that can be produced by the pilot and automatic devices operating the controls. However, autopilot forces need not be added to pilot forces. The system must be designed for the maximum effort of the pilot or autopilot, whichever is higher. In addition, if the pilot and the autopilot act in opposition, the part of the system between them may be designed for the maximum effort of the one that imposes the lesser load. Pilot forces used for design need not exceed the maximum forces prescribed in §23.397(b).

(2) The design must, in any case, provide a rugged system for service use, considering jamming, ground gusts, taxiing downwind, control inertia, and friction. Compliance with this subparagraph may be shown by designing for loads resulting from application of the minimum forces prescribed in §23.397(b).

(b) A 125 percent factor on computed hinge moments must be used to design elevator, aileron, and rudder systems. However, a factor as low as 1.0 may be used if hinge moments are based on accurate flight test data, the exact reduction depending upon the accuracy and reliability of the data.

(c) Pilot forces used for design are assumed to act at the appropriate control grips or pads as they would in flight, and to react at the attachments of the control system to the control surface horns.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13089, Aug. 13, 1969]

§ 23.397 Limit control forces and torques.

(a) In the control surface flight loading condition, the airloads on movable surfaces and the corresponding deflections need not exceed those that would result in flight from the application of any pilot force within the ranges specified in paragraph (b) of this section. In applying this criterion, the effects of control system boost and servo-mechanisms, and the effects of tabs must be considered. The automatic pilot effort must be used for design if it alone can produce higher control surface loads than the human pilot.

(b) The limit pilot forces and torques are as follows:

Control	Maximum forces or torques for design weight, weight equal to or less than 5,000 pounds¹	Minimum forces or torques²
Aileron:		
Stick	67 lbs	40 lbs.
Wheel ³	50 D in.-lbs ⁴	40 D in.-lbs. ⁴
Elevator:		
Stick	167 lbs	100 lbs.
Wheel (symmetrical)	200 lbs	100 lbs.
Wheel (unsymmetrical) ⁵		100 lbs.
Rudder	200 lbs	150 lbs.

¹For design weight (W) more than 5,000 pounds, the specified maximum values must be increased linearly with weight to 1.18 times the specified values at a design weight of 12,500 pounds and for commuter category airplanes, the specified values must be increased linearly with weight to 1.35 times the specified values at a design weight of 19,000 pounds.

²If the design of any individual set of control systems or surfaces makes these specified minimum forces or torques inapplicable, values corresponding to the present hinge moments obtained under §23.415, but not less than 0.6 of the specified minimum forces or torques, may be used.

³The critical parts of the aileron control system must also be designed for a single tangential force with a limit value of 1.25 times the couple force determined from the above criteria.

⁴D=wheel diameter (inches).

⁵The unsymmetrical force must be applied at one of the normal handgrip points on the control wheel.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13089, Aug. 13, 1969; Amdt. 23–17, 41 FR 55464, Dec. 20, 1976; Amdt. 23–34, 52 FR 1829, Jan. 15, 1987; Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.399 Dual control system.

(a) Each dual control system must be designed to withstand the force of the pilots operating in opposition, using individual pilot forces not less than the greater of—

(1) 0.75 times those obtained under §23.395; or

(2) The minimum forces specified in §23.397(b).

(b) Each dual control system must be designed to withstand the force of the pilots applied together, in the same direction, using individual pilot forces not less than 0.75 times those obtained under §23.395.

[Doc. No. 27805, 61 FR 5145, Feb. 9, 1996]

§ 23.405 Secondary control system.

Secondary controls, such as wheel brakes, spoilers, and tab controls, must be designed for the maximum forces that a pilot is likely to apply to those controls.

§ 23.407 Trim tab effects.

The effects of trim tabs on the control surface design conditions must be accounted for only where the surface loads are limited by maximum pilot effort. In these cases, the tabs are considered to be deflected in the direction that would assist the pilot. These deflections must correspond to the maximum degree of “out of trim” expected at the speed for the condition under consideration.

§ 23.409 Tabs.

Control surface tabs must be designed for the most severe combination of airspeed and tab deflection likely to be obtained within the flight envelope for any usable loading condition.

§ 23.415 Ground gust conditions.

(a) The control system must be investigated as follows for control surface loads due to ground gusts and taxiing downwind:

(1) If an investigation of the control system for ground gust loads is not required by paragraph (a)(2) of this section, but the applicant elects to design a part of the control system of these loads, these loads need only be carried from control surface horns through the nearest stops or gust locks and their supporting structures.

(2) If pilot forces less than the minimums specified in §23.397(b) are used for design, the effects of surface loads due to ground gusts and taxiing downwind must be investigated for the entire control system according to the formula:

$$H=K c S q$$

where—

H=limit hinge moment (ft.-lbs.);

c=mean chord of the control surface aft of the hinge line (ft.);

S=area of control surface aft of the hinge line (sq. ft.);

q=dynamic pressure (p.s.f.) based on a design speed not less than $14.6 \sqrt{W/S} + 14.6$ (f.p.s.) where W/S=wing loading at design maximum weight, except that the design speed need not exceed 88 (f.p.s.);

K=limit hinge moment factor for ground gusts derived in paragraph (b) of this section. (For ailerons and elevators, a positive value of K indicates a moment tending to depress the surface and a negative value of K indicates a moment tending to raise the surface).

(b) The limit hinge moment factor K for ground gusts must be derived as follows:

Surface	K	Position of controls
(a) Aileron	0.75	Control column locked lashed in mid-position.
(b) Aileron	±0.50	Ailerons at full throw; + moment on one aileron, – moment on the other.
(c) Elevator	±0.75	(c) Elevator full up (-).
(d) Elevator		(d) Elevator full down (+).
(e) Rudder	±0.75	(e) Rudder in neutral.
(f) Rudder		(f) Rudder at full throw.

(c) At all weights between the empty weight and the maximum weight declared for tie-down stated in the appropriate manual, any declared tie-down points and surrounding structure, control system, surfaces and associated gust locks, must be designed to withstand the limit load conditions that exist when the airplane is tied down and that result from wind speeds of up to 65 knots horizontally from any direction.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13089, Aug. 13, 1969; Amdt. 23–45, 58 FR 42160, Aug. 6, 1993; Amdt. 23–48, 61 FR 5145, Feb. 9, 1996]

Horizontal Stabilizing and Balancing Surfaces

§ 23.421 Balancing loads.

(a) A horizontal surface balancing load is a load necessary to maintain equilibrium in any specified flight condition with no pitching acceleration.

(b) Horizontal balancing surfaces must be designed for the balancing loads occurring at any point on the limit maneuvering envelope and in the flap conditions specified in §23.345.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13089, Aug. 13, 1969; Amdt. 23–42, 56 FR 352, Jan. 3, 1991]

§ 23.423 Maneuvering loads.

Each horizontal surface and its supporting structure, and the main wing of a canard or tandem wing configuration, if that surface has pitch control, must be designed for the maneuvering loads imposed by the following conditions:

(a) A sudden movement of the pitching control, at the speed V_A , to the maximum aft movement, and the maximum forward movement, as limited by the control stops, or pilot effort, whichever is critical.

(b) A sudden aft movement of the pitching control at speeds above V_A , followed by a forward movement of the pitching control resulting in the following combinations of normal and angular acceleration:

Condition	Normal acceleration (n)	Angular acceleration (radian/sec ²)
Nose-up pitching	1.0	$+39n_m \div V \times (n_m - 1.5)$
Nose-down pitching	n_m	$-39n_m \div V \times (n_m - 1.5)$

where—

(1) n_m =positive limit maneuvering load factor used in the design of the airplane; and

(2) V =initial speed in knots.

The conditions in this paragraph involve loads corresponding to the loads that may occur in a “checked maneuver” (a maneuver in which the pitching control is suddenly displaced in one direction and then suddenly moved in the opposite direction). The deflections and timing of the “checked maneuver” must avoid exceeding the limit maneuvering load factor. The total horizontal surface load for both nose-up and nose-down pitching conditions is the sum of the balancing loads at V and the specified value of the normal load factor n , plus the maneuvering load increment due to the specified value of the angular acceleration.

[Amdt. 23–42, 56 FR 353, Jan. 3, 1991; 56 FR 5455, Feb. 11, 1991]

§ 23.425 Gust loads.

(a) Each horizontal surface, other than a main wing, must be designed for loads resulting from—

(1) Gust velocities specified in §23.333(c) with flaps retracted; and

(2) Positive and negative gusts of 25 f.p.s. nominal intensity at V_F corresponding to the flight conditions specified in §23.345(a)(2).

(b) [Reserved]

(c) When determining the total load on the horizontal surfaces for the conditions specified in paragraph (a) of this section, the initial balancing loads for steady unaccelerated flight at the

pertinent design speeds V_F , V_C , and V_D must first be determined. The incremental load resulting from the gusts must be added to the initial balancing load to obtain the total load.

(d) In the absence of a more rational analysis, the incremental load due to the gust must be computed as follows only on airplane configurations with aft-mounted, horizontal surfaces, unless its use elsewhere is shown to be conservative:

$$\Delta L_{ht} = \frac{K_g U_{de} V a_{ht} S_{ht}}{498} \left(1 - \frac{d\varepsilon}{d\alpha} \right)$$

where—

ΔL_{ht} = Incremental horizontal tailload (lbs.);

K_g = Gust alleviation factor defined in §23.341;

U_{de} = Derived gust velocity (f.p.s.);

V = Airplane equivalent speed (knots);

a_{ht} = Slope of aft horizontal lift curve (per radian)

S_{ht} = Area of aft horizontal lift surface (ft²); and

$\left(1 - \frac{d\varepsilon}{d\alpha} \right)$ = Downwash factor

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13089 Aug. 13, 1969; Amdt. 23–42, 56 FR 353, Jan. 3, 1991]

§ 23.427 Unsymmetrical loads.

(a) Horizontal surfaces other than main wing and their supporting structure must be designed for unsymmetrical loads arising from yawing and slipstream effects, in combination with the loads prescribed for the flight conditions set forth in §§23.421 through 23.425.

(b) In the absence of more rational data for airplanes that are conventional in regard to location of engines, wings, horizontal surfaces other than main wing, and fuselage shape:

(1) 100 percent of the maximum loading from the symmetrical flight conditions may be assumed on the surface on one side of the plane of symmetry; and

(2) The following percentage of that loading must be applied to the opposite side:

Percent = $100 - 10(n - 1)$, where n is the specified positive maneuvering load factor, but this value may not be more than 80 percent.

(c) For airplanes that are not conventional (such as airplanes with horizontal surfaces other than

main wing having appreciable dihedral or supported by the vertical tail surfaces) the surfaces and supporting structures must be designed for combined vertical and horizontal surface loads resulting from each prescribed flight condition taken separately.

[Amdt. 23–14, 38 FR 31820, Nov. 19, 1973, as amended by Amdt. 23–42, 56 FR 353, Jan. 3, 1991]

Vertical Surfaces

§ 23.441 Maneuvering loads.

(a) At speeds up to V_A , the vertical surfaces must be designed to withstand the following conditions. In computing the loads, the yawing velocity may be assumed to be zero:

(1) With the airplane in unaccelerated flight at zero yaw, it is assumed that the rudder control is suddenly displaced to the maximum deflection, as limited by the control stops or by limit pilot forces.

(2) With the rudder deflected as specified in paragraph (a)(1) of this section, it is assumed that the airplane yaws to the overswing sideslip angle. In lieu of a rational analysis, an overswing angle equal to 1.5 times the static sideslip angle of paragraph (a)(3) of this section may be assumed.

(3) A yaw angle of 15 degrees with the rudder control maintained in the neutral position (except as limited by pilot strength).


(b) For commuter category airplanes, the loads imposed by the following additional maneuver must be substantiated at speeds from V_A to V_D/M_D . When computing the tail loads—

(1) The airplane must be yawed to the largest attainable steady state sideslip angle, with the rudder at maximum deflection caused by any one of the following:

(i) Control surface stops;

(ii) Maximum available booster effort;

(iii) Maximum pilot rudder force as shown below:

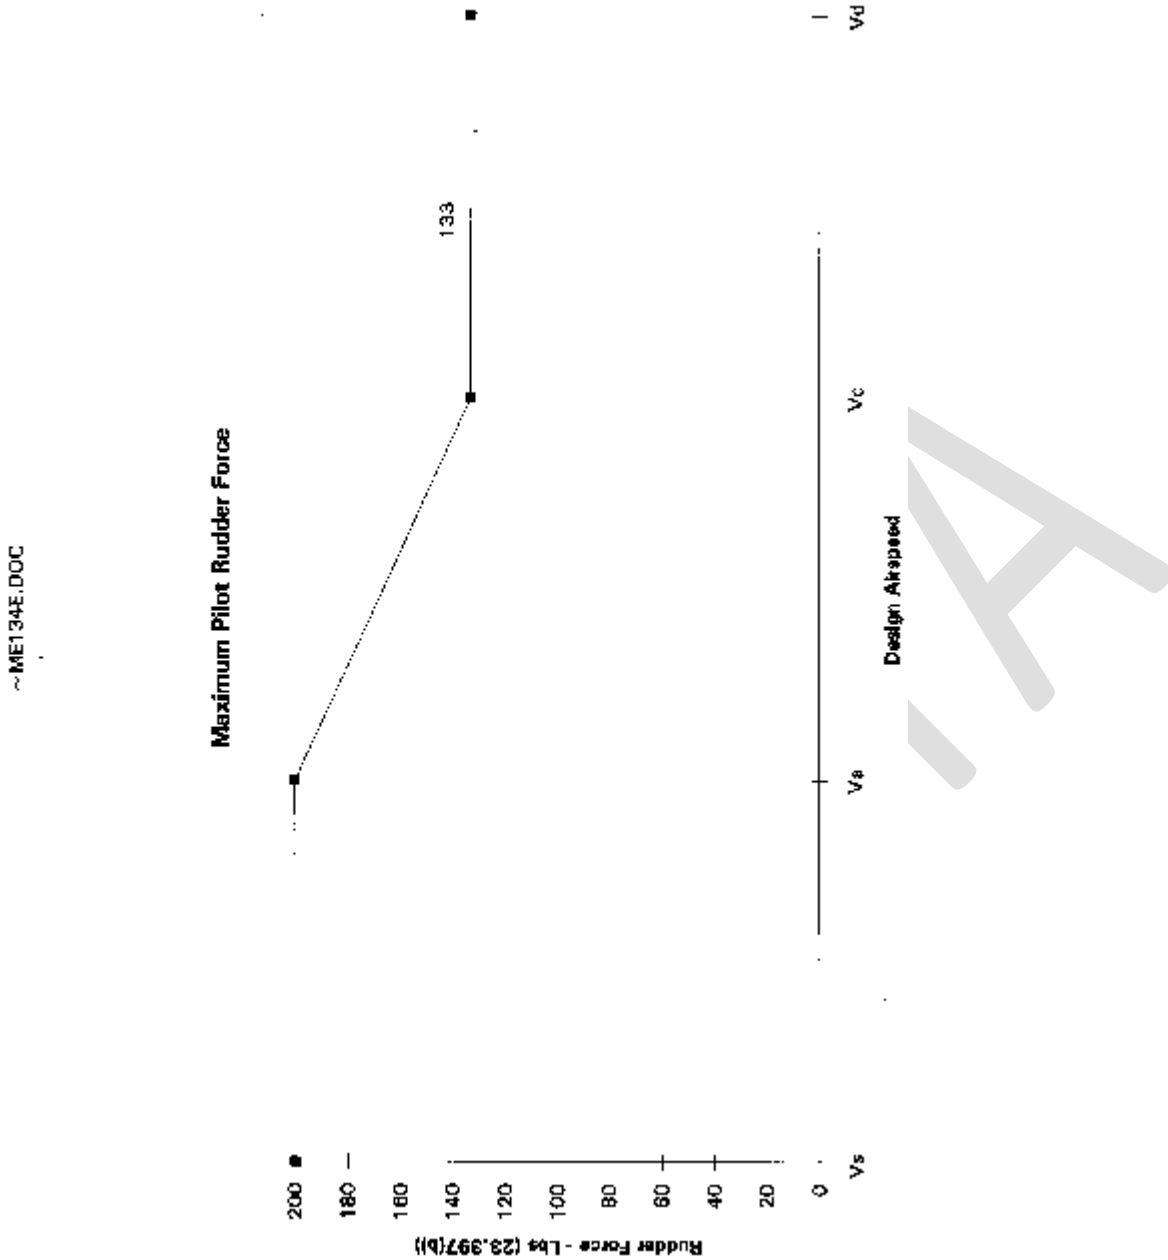

(2) The rudder must be suddenly displaced from the maximum deflection to the neutral position.

(c) The yaw angles specified in paragraph (a)(3) of this section may be reduced if the yaw angle chosen for a particular speed cannot be exceeded in—

- (1) Steady slip conditions;
- (2) Uncoordinated rolls from steep banks; or
- (3) Sudden failure of the critical engine with delayed corrective action.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13090, Aug. 13, 1969; Amdt. 23–14, 38 FR 31821, Nov. 19, 1973; Amdt. 23–28, 47 FR 13315, Mar. 29, 1982; Amdt. 23–42, 56 FR 353, Jan. 3, 1991; Amdt. 23–48, 61 FR 5145, Feb. 9, 1996]

§ 23.443 Gust loads.

(a) Vertical surfaces must be designed to withstand, in unaccelerated flight at speed V_C , lateral gusts of the values prescribed for V_C in §23.333(c).

(b) In addition, for commuter category airplanes, the airplane is assumed to encounter derived gusts normal to the plane of symmetry while in unaccelerated flight at V_B , V_C , V_D , and V_F . The derived gusts and airplane speeds corresponding to these conditions, as determined by §§23.341 and 23.345, must be investigated. The shape of the gust must be as specified in §23.333(c)(2)(i).

(c) In the absence of a more rational analysis, the gust load must be computed as follows:

$$L_{vt} = \frac{K_{gt} U_{de} V a_{vt} S_{vt}}{498}$$

Where—

L_{vt} =Vertical surface loads (lbs.);

$$k_{gt} = \frac{0.88 \mu_{gt}}{5.3 + \mu_{gt}} = \text{gust alleviation factor;}$$

$$\mu_{gt} = \frac{2W}{\rho c_t g a_{vt} S_{vt}} \frac{K^2}{l_{vt}} = \text{lateral mass ratio;}$$

U_{de} =Derived gust velocity (f.p.s.);

ρ =Air density (slugs/cu.ft.);

W =the applicable weight of the airplane in the particular load case (lbs.);

S_{vt} =Area of vertical surface (ft.²);

c_t =Mean geometric chord of vertical surface (ft.);

a_{vt} =Lift curve slope of vertical surface (per radian);

K =Radius of gyration in yaw (ft.);

l_{vt} =Distance from airplane c.g. to lift center of vertical surface (ft.);

g =Acceleration due to gravity (ft./sec.²); and

V =Equivalent airspeed (knots).

[Amdt. 23-7, 34 FR 13090, Aug. 13, 1969, as amended by Amdt. 23-34, 52 FR 1830, Jan. 15, 1987; 52 FR 7262, Mar. 9, 1987; Amdt. 23-24, 52 FR 34745, Sept. 14, 1987; Amdt. 23-42, 56 FR 353, Jan. 3, 1991; Amdt. 23-48, 61 FR 5147, Feb. 9, 1996]

§ 23.445 Outboard fins or winglets.

(a) If outboard fins or winglets are included on the horizontal surfaces or wings, the horizontal surfaces or wings must be designed for their maximum load in combination with loads induced by the fins or winglets and moments or forces exerted on the horizontal surfaces or wings by the fins or winglets.

(b) If outboard fins or winglets extend above and below the horizontal surface, the critical vertical surface loading (the load per unit area as determined under §§23.441 and 23.443) must be applied to—

(1) The part of the vertical surfaces above the horizontal surface with 80 percent of that loading applied to the part below the horizontal surface; and

(2) The part of the vertical surfaces below the horizontal surface with 80 percent of that loading applied to the part above the horizontal surface.

(c) The end plate effects of outboard fins or winglets must be taken into account in applying the yawing conditions of §§23.441 and 23.443 to the vertical surfaces in paragraph (b) of this section.

(d) When rational methods are used for computing loads, the maneuvering loads of §23.441 on the vertical surfaces and the one-g horizontal surface load, including induced loads on the horizontal surface and moments or forces exerted on the horizontal surfaces by the vertical surfaces, must be applied simultaneously for the structural loading condition.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31821, Nov. 19, 1973; Amdt. 23–42, 56 FR 353, Jan. 3, 1991]

Ailerons and Special Devices**§ 23.455 Ailerons.**

(a) The ailerons must be designed for the loads to which they are subjected—

(1) In the neutral position during symmetrical flight conditions; and

(2) By the following deflections (except as limited by pilot effort), during unsymmetrical flight conditions:

(i) Sudden maximum displacement of the aileron control at V_A . Suitable allowance may be made for control system deflections.

(ii) Sufficient deflection at V_C , where V_C is more than V_A , to produce a rate of roll not less than obtained in paragraph (a)(2)(i) of this section.

(iii) Sufficient deflection at V_D to produce a rate of roll not less than one-third of that obtained in paragraph (a)(2)(i) of this section.

(b) [Reserved]

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13090, Aug. 13, 1969; Amdt. 23–42, 56 FR 353, Jan. 3, 1991]

§ 23.459 Special devices.

The loading for special devices using aerodynamic surfaces (such as slots and spoilers) must be determined from test data.

Ground Loads

§ 23.471 General.

The limit ground loads specified in this subpart are considered to be external loads and inertia forces that act upon an airplane structure. In each specified ground load condition, the external reactions must be placed in equilibrium with the linear and angular inertia forces in a rational or conservative manner.

§ 23.473 Ground load conditions and assumptions.

(a) The ground load requirements of this subpart must be complied with at the design maximum weight except that §§23.479, 23.481, and 23.483 may be complied with at a design landing weight (the highest weight for landing conditions at the maximum descent velocity) allowed under paragraphs (b) and (c) of this section.

(b) The design landing weight may be as low as—

(1) 95 percent of the maximum weight if the minimum fuel capacity is enough for at least one-half hour of operation at maximum continuous power plus a capacity equal to a fuel weight which is the difference between the design maximum weight and the design landing weight; or

(2) The design maximum weight less the weight of 25 percent of the total fuel capacity.

(c) The design landing weight of a multiengine airplane may be less than that allowed under paragraph (b) of this section if—

(1) The airplane meets the one-engine-inoperative climb requirements of §23.67(b)(1) or (c); and

(2) Compliance is shown with the fuel jettisoning system requirements of §23.1001.

(d) The selected limit vertical inertia load factor at the center of gravity of the airplane for the ground load conditions prescribed in this subpart may not be less than that which would be obtained when landing with a descent velocity (V), in feet per second, equal to $4.4 (W/S)^{1/4}$, except that this velocity need not be more than 10 feet per second and may not be less than seven feet per second.

(e) Wing lift not exceeding two-thirds of the weight of the airplane may be assumed to exist throughout the landing impact and to act through the center of gravity. The ground reaction load factor may be equal to the inertia load factor minus the ratio of the above assumed wing lift to the airplane weight.

(f) If energy absorption tests are made to determine the limit load factor corresponding to the required limit descent velocities, these tests must be made under §23.723(a).

(g) No inertia load factor used for design purposes may be less than 2.67, nor may the limit ground reaction load factor be less than 2.0 at design maximum weight, unless these lower values will not be exceeded in taxiing at speeds up to takeoff speed over terrain as rough as that expected in service.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13090, Aug. 13, 1969; Amdt. 23–28, 47 FR 13315, Mar. 29, 1982; Amdt. 23–45, 58 FR 42160, Aug. 6, 1993; Amdt. 23–48, 61 FR 5147, Feb. 9, 1996]

§ 23.477 Landing gear arrangement.

Sections 23.479 through 23.483, or the conditions in appendix C, apply to airplanes with conventional arrangements of main and nose gear, or main and tail gear.

§ 23.479 Level landing conditions.

(a) For a level landing, the airplane is assumed to be in the following attitudes:

(1) For airplanes with tail wheels, a normal level flight attitude.

(2) For airplanes with nose wheels, attitudes in which—

(i) The nose and main wheels contact the ground simultaneously; and

(ii) The main wheels contact the ground and the nose wheel is just clear of the ground.

The attitude used in paragraph (a)(2)(i) of this section may be used in the analysis required under paragraph (a)(2)(ii) of this section.

(b) When investigating landing conditions, the drag components simulating the forces required to accelerate the tires and wheels up to the landing speed (spin-up) must be properly combined with the corresponding instantaneous vertical ground reactions, and the forward-acting horizontal loads resulting from rapid reduction of the spin-up drag loads (spring-back) must be combined with vertical ground reactions at the instant of the peak forward load, assuming wing lift and a tire-sliding coefficient of friction of 0.8. However, the drag loads may not be less than 25 percent of the maximum vertical ground reactions (neglecting wing lift).

(c) In the absence of specific tests or a more rational analysis for determining the wheel spin-up and spring-back loads for landing conditions, the method set forth in appendix D of this part must be used. If appendix D of this part is used, the drag components used for design must not be less than those given by appendix C of this part.

(d) For airplanes with tip tanks or large overhung masses (such as turbo-propeller or jet engines) supported by the wing, the tip tanks and the structure supporting the tanks or overhung masses must be designed for the effects of dynamic responses under the level landing conditions of either paragraph (a)(1) or (a)(2)(ii) of this section. In evaluating the effects of dynamic response, an

airplane lift equal to the weight of the airplane may be assumed.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55464, Dec. 20, 1976; Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.481 Tail down landing conditions.

(a) For a tail down landing, the airplane is assumed to be in the following attitudes:

(1) For airplanes with tail wheels, an attitude in which the main and tail wheels contact the ground simultaneously.

(2) For airplanes with nose wheels, a stalling attitude, or the maximum angle allowing ground clearance by each part of the airplane, whichever is less.

(b) For airplanes with either tail or nose wheels, ground reactions are assumed to be vertical, with the wheels up to speed before the maximum vertical load is attained.

§ 23.483 One-wheel landing conditions.

For the one-wheel landing condition, the airplane is assumed to be in the level attitude and to contact the ground on one side of the main landing gear. In this attitude, the ground reactions must be the same as those obtained on that side under §23.479.

§ 23.485 Side load conditions.

(a) For the side load condition, the airplane is assumed to be in a level attitude with only the main wheels contacting the ground and with the shock absorbers and tires in their static positions.

(b) The limit vertical load factor must be 1.33, with the vertical ground reaction divided equally between the main wheels.

(c) The limit side inertia factor must be 0.83, with the side ground reaction divided between the main wheels so that—

(1) $0.5 (W)$ is acting inboard on one side; and

(2) $0.33 (W)$ is acting outboard on the other side.

(d) The side loads prescribed in paragraph (c) of this section are assumed to be applied at the ground contact point and the drag loads may be assumed to be zero.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42160, Aug. 6, 1993]

§ 23.493 Braked roll conditions.

Under braked roll conditions, with the shock absorbers and tires in their static positions, the following apply:

- (a) The limit vertical load factor must be 1.33.
- (b) The attitudes and ground contacts must be those described in §23.479 for level landings.
- (c) A drag reaction equal to the vertical reaction at the wheel multiplied by a coefficient of friction of 0.8 must be applied at the ground contact point of each wheel with brakes, except that the drag reaction need not exceed the maximum value based on limiting brake torque.

§ 23.497 Supplementary conditions for tail wheels.

In determining the ground loads on the tail wheel and affected supporting structures, the following apply:

- (a) For the obstruction load, the limit ground reaction obtained in the tail down landing condition is assumed to act up and aft through the axle at 45 degrees. The shock absorber and tire may be assumed to be in their static positions.
- (b) For the side load, a limit vertical ground reaction equal to the static load on the tail wheel, in combination with a side component of equal magnitude, is assumed. In addition—
 - (1) If a swivel is used, the tail wheel is assumed to be swiveled 90 degrees to the airplane longitudinal axis with the resultant ground load passing through the axle;
 - (2) If a lock, steering device, or shimmy damper is used, the tail wheel is also assumed to be in the trailing position with the side load acting at the ground contact point; and
 - (3) The shock absorber and tire are assumed to be in their static positions.
- (c) If a tail wheel, bumper, or an energy absorption device is provided to show compliance with §23.925(b), the following apply:
 - (1) Suitable design loads must be established for the tail wheel, bumper, or energy absorption device; and
 - (2) The supporting structure of the tail wheel, bumper, or energy absorption device must be designed to withstand the loads established in paragraph (c)(1) of this section.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5147, Feb. 9, 1996]

§ 23.499 Supplementary conditions for nose wheels.

In determining the ground loads on nose wheels and affected supporting structures, and assuming that the shock absorbers and tires are in their static positions, the following conditions must be met:

- (a) For aft loads, the limit force components at the axle must be—
 - (1) A vertical component of 2.25 times the static load on the wheel; and

(2) A drag component of 0.8 times the vertical load.

(b) For forward loads, the limit force components at the axle must be—

(1) A vertical component of 2.25 times the static load on the wheel; and

(2) A forward component of 0.4 times the vertical load.

(c) For side loads, the limit force components at ground contact must be—

(1) A vertical component of 2.25 times the static load on the wheel; and

(2) A side component of 0.7 times the vertical load.

(d) For airplanes with a steerable nose wheel that is controlled by hydraulic or other power, at design takeoff weight with the nose wheel in any steerable position, the application of 1.33 times the full steering torque combined with a vertical reaction equal to 1.33 times the maximum static reaction on the nose gear must be assumed. However, if a torque limiting device is installed, the steering torque can be reduced to the maximum value allowed by that device.

(e) For airplanes with a steerable nose wheel that has a direct mechanical connection to the rudder pedals, the mechanism must be designed to withstand the steering torque for the maximum pilot forces specified in §23.397(b).

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5147, Feb. 9, 1996]

§ 23.505 Supplementary conditions for skiplanes.

In determining ground loads for skiplanes, and assuming that the airplane is resting on the ground with one main ski frozen at rest and the other skis free to slide, a limit side force equal to 0.036 times the design maximum weight must be applied near the tail assembly, with a factor of safety of 1.

[Amdt. 23–7, 34 FR 13090, Aug. 13, 1969]

§ 23.507 Jacking loads.

(a) The airplane must be designed for the loads developed when the aircraft is supported on jacks at the design maximum weight assuming the following load factors for landing gear jacking points at a three-point attitude and for primary flight structure jacking points in the level attitude:

(1) Vertical-load factor of 1.35 times the static reactions.

(2) Fore, aft, and lateral load factors of 0.4 times the vertical static reactions.

(b) The horizontal loads at the jack points must be reacted by inertia forces so as to result in no change in the direction of the resultant loads at the jack points.

(c) The horizontal loads must be considered in all combinations with the vertical load.

[Amdt. 23–14, 38 FR 31821, Nov. 19, 1973]

§ 23.509 Towing loads.

The towing loads of this section must be applied to the design of tow fittings and their immediate attaching structure.

(a) The towing loads specified in paragraph (d) of this section must be considered separately. These loads must be applied at the towing fittings and must act parallel to the ground. In addition:

(1) A vertical load factor equal to 1.0 must be considered acting at the center of gravity; and

(2) The shock struts and tires must be in their static positions.

(b) For towing points not on the landing gear but near the plane of symmetry of the airplane, the drag and side tow load components specified for the auxiliary gear apply. For towing points located outboard of the main gear, the drag and side tow load components specified for the main gear apply. Where the specified angle of swivel cannot be reached, the maximum obtainable angle must be used.

(c) The towing loads specified in paragraph (d) of this section must be reacted as follows:

(1) The side component of the towing load at the main gear must be reacted by a side force at the static ground line of the wheel to which the load is applied.

(2) The towing loads at the auxiliary gear and the drag components of the towing loads at the main gear must be reacted as follows:

(i) A reaction with a maximum value equal to the vertical reaction must be applied at the axle of the wheel to which the load is applied. Enough airplane inertia to achieve equilibrium must be applied.

(ii) The loads must be reacted by airplane inertia.

(d) The prescribed towing loads are as follows, where W is the design maximum weight:

Tow point	Position	Load		
		Magnitude	No.	Direction
Main gear		0.225W	1	Forward, parallel to drag axis. Forward, at 30° to drag axis. Aft, parallel to drag axis. Aft, at 30° to drag axis.
Auxiliary gear	Swiveled forward	0.3W	5	Forward.

				Aft.
	Swiveled aft	0.3W	7	Forward. Aft.
	Swiveled 45° from forward	0.15W	9	Forward, in plane of wheel. Aft, in plane of wheel.
	Swiveled 45° from aft	0.15W	11	Forward, in plane of wheel. Aft, in plane of wheel.

[Amdt. 23–14, 38 FR 31821, Nov. 19, 1973]

§ 23.511 Ground load; unsymmetrical loads on multiple-wheel units.

(a) Pivoting loads. The airplane is assumed to pivot about on side of the main gear with—

(1) The brakes on the pivoting unit locked; and

(2) Loads corresponding to a limit vertical load factor of 1, and coefficient of friction of 0.8 applied to the main gear and its supporting structure.

(b) Unequal tire loads. The loads established under §§23.471 through 23.483 must be applied in turn, in a 60/40 percent distribution, to the dual wheels and tires in each dual wheel landing gear unit.

(c) Deflated tire loads. For the deflated tire condition—

(1) 60 percent of the loads established under §§23.471 through 23.483 must be applied in turn to each wheel in a landing gear unit; and

(2) 60 percent of the limit drag and side loads, and 100 percent of the limit vertical load established under §§23.485 and 23.493 or lesser vertical load obtained under paragraph (c)(1) of this section, must be applied in turn to each wheel in the dual wheel landing gear unit.

[Amdt. 23–7, 34 FR 13090, Aug. 13, 1969]

Water Loads

§ 23.521 Water load conditions.

(a) The structure of seaplanes and amphibians must be designed for water loads developed during takeoff and landing with the seaplane in any attitude likely to occur in normal operation at appropriate forward and sinking velocities under the most severe sea conditions likely to be encountered.

(b) Unless the applicant makes a rational analysis of the water loads, §§23.523 through 23.537 apply.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42160, Aug. 6, 1993; Amdt. 23–48, 61 FR 5147, Feb. 9, 1996]

§ 23.523 Design weights and center of gravity positions.

(a) Design weights. The water load requirements must be met at each operating weight up to the design landing weight except that, for the takeoff condition prescribed in §23.531, the design water takeoff weight (the maximum weight for water taxi and takeoff run) must be used.

(b) Center of gravity positions. The critical centers of gravity within the limits for which certification is requested must be considered to reach maximum design loads for each part of the seaplane structure.

[Doc. No. 26269, 58 FR 42160, Aug. 6, 1993]

§ 23.525 Application of loads.

(a) Unless otherwise prescribed, the seaplane as a whole is assumed to be subjected to the loads corresponding to the load factors specified in §23.527.

(b) In applying the loads resulting from the load factors prescribed in §23.527, the loads may be distributed over the hull or main float bottom (in order to avoid excessive local shear loads and bending moments at the location of water load application) using pressures not less than those prescribed in §23.533(c).

(c) For twin float seaplanes, each float must be treated as an equivalent hull on a fictitious seaplane with a weight equal to one-half the weight of the twin float seaplane.

(d) Except in the takeoff condition of §23.531, the aerodynamic lift on the seaplane during the impact is assumed to be 2/3 of the weight of the seaplane.

[Doc. No. 26269, 58 FR 42161, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993]

§ 23.527 Hull and main float load factors.

(a) Water reaction load factors n_w must be computed in the following manner:

(1) For the step landing case

$$n_w = \frac{C_1 V_{so}^2}{\left(\tan^{\frac{2}{3}} \beta\right) W^{\frac{1}{3}}}$$

(2) For the bow and stern landing cases

$$n_w = \frac{C_1 V_{so}^2}{\left(\tan^{\frac{2}{3}} \beta\right) W^{\frac{1}{3}}} \times \frac{K_1}{\left(1 + r_x^2\right)^{\frac{2}{3}}}$$

(b) The following values are used:

- (1) n_w =water reaction load factor (that is, the water reaction divided by seaplane weight).
 - (2) C_1 =empirical seaplane operations factor equal to 0.012 (except that this factor may not be less than that necessary to obtain the minimum value of step load factor of 2.33).
 - (3) V_{SO} =seaplane stalling speed in knots with flaps extended in the appropriate landing position and with no slipstream effect.
 - (4) β =Angle of dead rise at the longitudinal station at which the load factor is being determined in accordance with figure 1 of appendix I of this part.
 - (5) W =seaplane landing weight in pounds.
 - (6) K_1 =empirical hull station weighing factor, in accordance with figure 2 of appendix I of this part.
 - (7) r_x =ratio of distance, measured parallel to hull reference axis, from the center of gravity of the seaplane to the hull longitudinal station at which the load factor is being computed to the radius of gyration in pitch of the seaplane, the hull reference axis being a straight line, in the plane of symmetry, tangential to the keel at the main step.
- (c) For a twin float seaplane, because of the effect of flexibility of the attachment of the floats to the seaplane, the factor K_1 may be reduced at the bow and stern to 0.8 of the value shown in figure 2 of appendix I of this part. This reduction applies only to the design of the carrythrough and seaplane structure.

[Doc. No. 26269, 58 FR 42161, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993]

§ 23.529 Hull and main float landing conditions.

- (a) Symmetrical step, bow, and stern landing. For symmetrical step, bow, and stern landings, the limit water reaction load factors are those computed under §23.527. In addition—
- (1) For symmetrical step landings, the resultant water load must be applied at the keel, through the center of gravity, and must be directed perpendicularly to the keel line;
 - (2) For symmetrical bow landings, the resultant water load must be applied at the keel, one-fifth of the longitudinal distance from the bow to the step, and must be directed perpendicularly to the keel line; and
 - (3) For symmetrical stern landings, the resultant water load must be applied at the keel, at a point 85 percent of the longitudinal distance from the step to the stern post, and must be directed perpendicularly to the keel line.
- (b) Unsymmetrical landing for hull and single float seaplanes. Unsymmetrical step, bow, and stern landing conditions must be investigated. In addition—
- (1) The loading for each condition consists of an upward component and a side component equal,

respectively, to 0.75 and 0.25 $\tan \beta$ times the resultant load in the corresponding symmetrical landing condition; and

(2) The point of application and direction of the upward component of the load is the same as that in the symmetrical condition, and the point of application of the side component is at the same longitudinal station as the upward component but is directed inward perpendicularly to the plane of symmetry at a point midway between the keel and chine lines.

(c) Unsymmetrical landing; twin float seaplanes. The unsymmetrical loading consists of an upward load at the step of each float of 0.75 and a side load of 0.25 $\tan \beta$ at one float times the step landing load reached under §23.527. The side load is directed inboard, perpendicularly to the plane of symmetry midway between the keel and chine lines of the float, at the same longitudinal station as the upward load.

[Doc. No. 26269, 58 FR 42161, Aug. 6, 1993]

§ 23.531 Hull and main float takeoff condition.

For the wing and its attachment to the hull or main float—

(a) The aerodynamic wing lift is assumed to be zero; and

(b) A downward inertia load, corresponding to a load factor computed from the following formula, must be applied:

$$n = \frac{C_{T0} V_{S1}^2}{(\tan^{\frac{2}{3}} \beta) W^{\frac{1}{3}}}$$

Where—

n =inertia load factor;

C_{T0} =empirical seaplane operations factor equal to 0.004;

V_{S1} =seaplane stalling speed (knots) at the design takeoff weight with the flaps extended in the appropriate takeoff position;

β =angle of dead rise at the main step (degrees); and

W =design water takeoff weight in pounds.

[Doc. No. 26269, 58 FR 42161, Aug. 6, 1993]

§ 23.533 Hull and main float bottom pressures.

(a) General. The hull and main float structure, including frames and bulkheads, stringers, and bottom plating, must be designed under this section.

(b) Local pressures. For the design of the bottom plating and stringers and their attachments to the supporting structure, the following pressure distributions must be applied:

(1) For an unflared bottom, the pressure at the chine is 0.75 times the pressure at the keel, and the pressures between the keel and chine vary linearly, in accordance with figure 3 of appendix I of this part. The pressure at the keel (p.s.i.) is computed as follows:

$$P_K = \frac{C_2 K_2 V_{S1}^2}{\text{Tan } \beta_k}$$

where—

P_K =pressure (p.s.i.) at the keel;

C_2 =0.00213;

K_2 =hull station weighing factor, in accordance with figure 2 of appendix I of this part;

V_{S1} =seaplane stalling speed (knots) at the design water takeoff weight with flaps extended in the appropriate takeoff position; and

β_k =angle of dead rise at keel, in accordance with figure 1 of appendix I of this part.

(2) For a flared bottom, the pressure at the beginning of the flare is the same as that for an unflared bottom, and the pressure between the chine and the beginning of the flare varies linearly, in accordance with figure 3 of appendix I of this part. The pressure distribution is the same as that prescribed in paragraph (b)(1) of this section for an unflared bottom except that the pressure at the chine is computed as follows:

$$P_{ch} = \frac{C_3 K_2 V_{S1}^2}{\text{Tan } \beta}$$

where—

P_{ch} =pressure (p.s.i.) at the chine;

C_3 =0.0016;

K_2 =hull station weighing factor, in accordance with figure 2 of appendix I of this part;

V_{S1} =seaplane stalling speed (knots) at the design water takeoff weight with flaps extended in the appropriate takeoff position; and

β =angle of dead rise at appropriate station.

The area over which these pressures are applied must simulate pressures occurring during high localized impacts on the hull or float, but need not extend over an area that would induce critical stresses in the frames or in the overall structure.

(c) Distributed pressures. For the design of the frames, keel, and chine structure, the following pressure distributions apply:

(1) Symmetrical pressures are computed as follows:

$$P = \frac{C_4 K_2 V_{S0}^2}{\tan \beta}$$

where—

P=pressure (p.s.i.);

$C_4=0.078 C_1$ (with C_1 computed under §23.527);

K_2 =hull station weighing factor, determined in accordance with figure 2 of appendix I of this part;

V_{S0} =seaplane stalling speed (knots) with landing flaps extended in the appropriate position and with no slipstream effect; and

β =angle of dead rise at appropriate station.

(2) The unsymmetrical pressure distribution consists of the pressures prescribed in paragraph (c)(1) of this section on one side of the hull or main float centerline and one-half of that pressure on the other side of the hull or main float centerline, in accordance with figure 3 of appendix I of this part.

(3) These pressures are uniform and must be applied simultaneously over the entire hull or main float bottom. The loads obtained must be carried into the sidewall structure of the hull proper, but need not be transmitted in a fore and aft direction as shear and bending loads.

[Doc. No. 26269, 58 FR 42161, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993]

§ 23.535 Auxiliary float loads.

(a) General. Auxiliary floats and their attachments and supporting structures must be designed for the conditions prescribed in this section. In the cases specified in paragraphs (b) through (e) of this section, the prescribed water loads may be distributed over the float bottom to avoid excessive local loads, using bottom pressures not less than those prescribed in paragraph (g) of this section.

(b) Step loading. The resultant water load must be applied in the plane of symmetry of the float at a point three-fourths of the distance from the bow to the step and must be perpendicular to the keel. The resultant limit load is computed as follows, except that the value of L need not exceed three times the weight of the displaced water when the float is completely submerged:

$$L = \frac{C_5 V_{S0}^2 W^{\frac{1}{2}}}{\tan^{\frac{1}{2}} \beta_s (1 + r_y^2)^{\frac{1}{2}}}$$

where—

L=limit load (lbs.);

$C_5=0.0053$;

V_{s0} =seaplane stalling speed (knots) with landing flaps extended in the appropriate position and with no slipstream effect;

W=seaplane design landing weight in pounds;

β s=angle of dead rise at a station $\frac{3}{4}$ of the distance from the bow to the step, but need not be less than 15 degrees; and

r_y =ratio of the lateral distance between the center of gravity and the plane of symmetry of the float to the radius of gyration in roll.

(c) Bow loading. The resultant limit load must be applied in the plane of symmetry of the float at a point one-fourth of the distance from the bow to the step and must be perpendicular to the tangent to the keel line at that point. The magnitude of the resultant load is that specified in paragraph (b) of this section.

(d) Unsymmetrical step loading. The resultant water load consists of a component equal to 0.75 times the load specified in paragraph (a) of this section and a side component equal to $0.025 \tan \beta$ times the load specified in paragraph (b) of this section. The side load must be applied perpendicularly to the plane of symmetry of the float at a point midway between the keel and the chine.

(e) Unsymmetrical bow loading. The resultant water load consists of a component equal to 0.75 times the load specified in paragraph (b) of this section and a side component equal to $0.25 \tan \beta$ times the load specified in paragraph (c) of this section. The side load must be applied perpendicularly to the plane of symmetry at a point midway between the keel and the chine.

(f) Immersed float condition. The resultant load must be applied at the centroid of the cross section of the float at a point one-third of the distance from the bow to the step. The limit load components are as follows:

vertical = PgV

$$\text{aft} = \frac{C_x P V^{\frac{1}{2}} (K V_{s0})^2}{2}$$

$$\text{side} = \frac{C_y P V^{\frac{1}{2}} (K V_{s0})^2}{2}$$

where—

P=mass density of water (slugs/ft.³)

V=volume of float (ft.³);

C_x =coefficient of drag force, equal to 0.133;

C_y =coefficient of side force, equal to 0.106;

$K=0.8$, except that lower values may be used if it is shown that the floats are incapable of submerging at a speed of $0.8 V_{so}$ in normal operations;

V_{so} =seaplane stalling speed (knots) with landing flaps extended in the appropriate position and with no slipstream effect; and

g =acceleration due to gravity (ft/sec²).

(g) Float bottom pressures. The float bottom pressures must be established under §23.533, except that the value of K_2 in the formulae may be taken as 1.0. The angle of dead rise to be used in determining the float bottom pressures is set forth in paragraph (b) of this section.

[Doc. No. 26269, 58 FR 42162, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993]

§ 23.537 Seawing loads.

Seawing design loads must be based on applicable test data.

[Doc. No. 26269, 58 FR 42163, Aug. 6, 1993]

Emergency Landing Conditions

<p>23.561 General.</p> <p>(a) The airplane, although it may be damaged in emergency landing conditions, must be designed as prescribed in this section to protect each occupant under those conditions.</p> <p>(b) The structure must be designed to give each occupant every reasonable chance of escaping serious injury when:</p> <p>(1) Proper use is made of the seats, safety belts, and shoulder harnesses provided for in the design;</p> <p>(2) The occupant experiences the static inertia loads corresponding to the following ultimate load factors:</p> <p>(i) Upward, 3,0g for normal, utility, and commuter category airplanes, or 4,5g for acrobatic category airplanes;</p> <p>(ii) Forward, 9,0g;</p>	<p>23.561 Geral.</p> <p>(a) O avião, embora possa ser danificado em pouso sob condições de emergência, deve ser projetado como previsto nesta seção para proteger cada ocupante sob tais condições.</p> <p>(b) A estrutura deve ser projetada para permitir a cada ocupante todas as chances razoáveis para escapar de ferimentos graves quando:</p> <p>(1) há utilização adequada dos assentos, cintos de segurança e cintos de ombro previstos no projeto;</p> <p>(2) O ocupante experimenta as cargas estáticas inerciais correspondentes aos fatores de cargas finais:</p> <p>(i) Para cima, 3,0g para aviões das categorias: normal, utilidade e transporte regional ou 4,5g para aviões da categoria acrobática;</p> <p>(ii) Para frente, 9,0g;</p>
--	--

<p>(iii) Sideward, 1,5g; and</p> <p>(iv) Downward, 6,0g when certification to the emergency exit provisions of paragraph 23.807(d)(4) is requested; and</p> <p>(3) The items of mass within the cabin, that could injure an occupant, experience the static inertia loads corresponding to the following ultimate load factors:</p> <p>(i) Upward, 3,0g;</p> <p>(ii) Forward, 18,0g; and</p> <p>(iii) Sideward, 4,5g.</p> <p>(c) Each airplane with retractable landing gear must be designed to protect each occupant in a landing:</p> <p>(1) With the wheels retracted;</p> <p>(2) With moderate descent velocity; and</p> <p>(3) Assuming, in the absence of a more rational analysis:</p> <p>(i) A downward ultimate inertia force of 3 g; and</p> <p>(ii) A coefficient of friction of 0,5 at the ground.</p> <p>(d) If it is not established that a turnover is unlikely during an emergency landing, the structure must be designed to protect the occupants in a complete turnover as follows:</p> <p>(1) The likelihood of a turnover may be shown by an analysis assuming the following conditions:</p> <p>(i) The most adverse combination of weight and center of gravity position;</p> <p>(ii) Longitudinal load factor of 9.0g;</p>	<p>(iii) Lateral, 1,5g; e</p> <p>(iv) Para baixo, 6,0g quando é solicitada a certificação de provisões de saída de emergência do parágrafo 23.807(d)(4); e</p> <p>(3) Os itens de massa dentro da cabine que poderiam ferir um ocupante experimentam as cargas estáticas de inércia correspondentes aos seguintes fatores de cargas finais:</p> <p>(i) Para cima, 3,0g;</p> <p>(ii) Para frente, 18,0g; e</p> <p>(iii) Lateral, 4,5g.</p> <p>(c) Cada avião com trem de pouso retrátil deve ser projetado para proteger cada ocupante em um pouso:</p> <p>(1) Com as rodas recolhidas;</p> <p>(2) Com velocidade de descida moderada; e</p> <p>(3) Assumindo, na falta de uma análise mais aprofundada:</p> <p>(i) Uma força de inércia final de 3g para baixo; e</p> <p>(ii) Um coeficiente de atrito de 0,5 no solo.</p> <p>(d) Se não for estabelecido que uma rotação do avião é improvável durante um pouso de emergência a estrutura deve ser projetada para proteger os ocupantes em uma rotação completa da seguinte forma:</p> <p>(1) A probabilidade de uma rotação pode ser demonstrada por uma análise assumindo as seguintes condições:</p> <p>(i) A combinação mais adversa de peso e posição do centro de gravidade;</p> <p>(ii) Fator de carga longitudinal de 9,0g;</p>
--	--

<p>(iii) Vertical load factor of 1,0g; and</p> <p>(iv) For airplanes with tricycle landing gear, the nose wheel strut failed with the nose contacting the ground.</p> <p>(2) For determining the loads to be applied to the inverted airplane after a turnover, an upward ultimate inertia load factor of 3,0g and a coefficient of friction with the ground of 0,5 must be used.</p> <p>(e) Except as provided in paragraph 23.787(c), the supporting structure must be designed to restrain, under loads up to those specified in paragraph (b)(3) of this section, each item of mass that could injure an occupant if it came loose in a minor crash landing.</p> <p>(1) For engines mounted inside the fuselage, aft of the cabin, it must be shown by test or analysis that the engine and attached accessories, and the engine mounting structure:</p> <p>(i) Can withstand a forward acting static ultimate inertia load factor of 18,0 g plus the maximum takeoff engine thrust; or</p> <p>(ii) The airplane structure is designed to preclude the engine and its attached accessories from entering or protruding into the cabin should the engine mounts fail.</p> <p>(2) [Reserved]</p>	<p>(iii) Fator de carga vertical de 1,0g; e</p> <p>(iv) Para aviões com trem de pouso do tipo triciclo, o suporte da roda de nariz falhada com o nariz tocando o solo.</p> <p>(2) Para determinar as cargas a serem aplicadas ao avião invertido após uma rotação, um fator de carga de inércia final para cima de 3,0g e um coeficiente de atrito com o solo de 0,5 devem ser utilizados.</p> <p>(e) Exceto como previsto no parágrafo 23.787(c), a estrutura de suporte deve ser projetada para restringir, sob cargas até aquelas especificadas no parágrafo (b)(3) desta seção, cada item de massa que poderia ferir um ocupante se ele se soltasse em um pouso do tipo minor crash.</p> <p>(1) Para motores montados dentro da fuselagem, atrás da cabine, deve ser demonstrado por teste ou análise que o motor e acessórios acoplados, e a estrutura de montagem do motor:</p> <p>(i) Podem suportar um fator de carga inercial final atuando frontalmente de 18,0 g mais o máximo empuxo do motor na decolagem; ou</p> <p>(ii) A estrutura do avião é projetada para impedir o motor e seus acessórios acoplados de entrarem ou sobressaiam na cabine caso os coxins do motor falhem.</p> <p>(2) [Reservado]</p>
--	--

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13090, Aug. 13, 1969; Amdt. 23-24, 52 FR 34745, Sept. 14, 1987; Amdt. 23-36, 53 FR 30812, Aug. 15, 1988; Amdt. 23-46, 59 FR 25772, May 17, 1994; Amdt. 23-48, 61 FR 5147, Feb. 9, 1996; Amdt. 23-62, 76 FR 75756, Dec. 2, 2011]

<p>23.562 Emergency landing dynamic conditions.</p> <p>(a) Each seat/restraint system for use in a normal, utility, or acrobatic category airplane, or in a commuter category jet airplane, must be designed to protect each occupant during an</p>	<p>23.562 Condições dinâmicas para pouso de emergência.</p> <p>(a) Cada assento/sistema de retenção para uso em aviões da categoria normal, utilidade ou acrobática, ou em um avião a jato da categoria transporte regional, deve ser projetado para</p>
--	---

<p>emergency landing when:</p> <p>(1) Proper use is made of seats, safety belts, and shoulder harnesses provided for in the design; and</p> <p>(2) The occupant is exposed to the loads resulting from the conditions prescribed in this section.</p> <p>(b) Except for those seat/restraint systems that are required to meet paragraph (d) of this section, each seat/restraint system for crew or passenger occupancy in a normal, utility, or acrobatic category airplane, or in a commuter category jet airplane, must successfully complete dynamic tests or be demonstrated by rational analysis supported by dynamic tests, in accordance with each of the following conditions. These tests must be conducted with an occupant simulated by an anthropomorphic test dummy (ATD) defined by 49 CFR Part 572, Subpart B, or an ANAC-approved equivalent, with a nominal weight of 170 pounds (77 kg) and seated in the normal upright position.</p> <p>(1) For the first test, the change in velocity may not be less than 31 feet per second (34 km/h). The seat/restraint system must be oriented in its nominal position with respect to the airplane and with the horizontal plane of the airplane pitched up 60 degrees, with no yaw, relative to the impact vector. For seat/restraint systems to be installed in the first row of the airplane, peak deceleration must occur in not more than 0,05 seconds after impact and must reach a minimum of 19g. For all other seat/restraint systems, peak deceleration must occur in not more than 0,06 seconds after impact and must reach a minimum of 15g.</p> <p>(2) For the second test, the change in velocity may not be less than 42 feet per second (45 km/h). The seat/restraint system must be oriented in its nominal position with respect to the airplane and with the vertical plane of the airplane yawed 10 degrees, with no pitch, relative to the impact vector in a direction that</p>	<p>proteger o ocupante durante um pouso de emergência quando:</p> <p>(1) É feito o uso apropriado dos assentos, cintos de segurança, e cintos de ombro providos no projeto; e</p> <p>(2) O ocupante é exposto às cargas resultantes das condições prescritas nesta seção.</p> <p>(b) Exceto para aqueles assentos/sistemas de retenção que são requeridos para cumprir o parágrafo (d) desta seção, cada assento/sistema de retenção para a ocupação da tripulação ou passageiro em aviões da categoria normal, utilidade ou acrobática, ou em um avião a jato da categoria transporte regional, deve completar os ensaios dinâmicos com sucesso ou ser demonstrado por análise racional suportada por ensaio dinâmico, de acordo com cada uma das seguintes condições. Esses ensaios devem ser conduzidos com um ocupante simulado por um boneco antropomórfico de ensaio (ATD) definido pelo 49 CFR part 572, Subpart B, ou um equivalente aprovado pelo ANAC, com um peso nominal de 170 libras (77 kg) e sentado na posição ereta normal.</p> <p>(1) Para o primeiro ensaio, a mudança na velocidade não pode ser menor que 31 pés por segundo (34 km/h). O assento/sistema de retenção deve ser orientado na posição nominal com relação ao avião e com o plano horizontal do avião cabrado para cima 60 graus, sem guinada, com relação ao vetor de impacto. Para assentos/sistemas de retenção a serem instalados na primeira fileira do avião, o pico de desaceleração deve ocorrer em no máximo 0,05 segundo depois do impacto e deve atingir um mínimo de 19g. Para os outros assentos/sistemas de retenção, o pico de desaceleração deve ocorrer em no máximo 0,06 segundo depois do impacto e deve atingir no mínimo 15g.</p> <p>(2) Para o segundo ensaio, a mudança na velocidade não pode ser menor que 42 pés por segundo (45 km/h). O assento/sistema de</p>
--	---

results in the greatest load on the shoulder harness. For seat/restraint systems to be installed in the first row of the airplane, peak deceleration must occur in not more than 0.05 seconds after impact and must reach a minimum of 26g. For all other seat/restraint systems, peak deceleration must occur in not more than 0,06 seconds after impact and must reach a minimum of 21g.

(3) To account for floor warpage, the floor rails or attachment devices used to attach the seat/restraint system to the airframe structure must be preloaded to misalign with respect to each other by at least 10 degrees vertically (i.e., pitch out of parallel) and one of the rails or attachment devices must be preloaded to misalign by 10 degrees in roll prior to conducting the test defined by paragraph (b)(2) of this section.

(c) Compliance with the following requirements must be shown during the dynamic tests conducted in accordance with paragraph (b) of this section:

(1) The seat/restraint system must restrain the ATD although seat/restraint system components may experience deformation, elongation, displacement, or crushing intended as part of the design.

(2) The attachment between the seat/restraint system and the test fixture must remain intact, although the seat structure may have deformed.

(3) Each shoulder harness strap must remain on the ATD's shoulder during the impact.

(4) The safety belt must remain on the ATD's pelvis during the impact.

(5) The results of the dynamic tests must show that the occupant is protected from serious head injury.

(i) When contact with adjacent seats, structure, or other items in the cabin can occur, protection must be provided so that the head impact does

retenção deve ser orientado na posição nominal com relação ao avião e com o plano vertical do avião guinado 10 graus, sem arfagem, em relação ao vetor de impacto na direção que resulta na maior carga no cinto de ombro. Para assentos/sistemas de retenção a serem instalados na primeira fileira do avião, o pico de desaceleração deve ocorrer em no máximo 0,05 segundos depois do impacto e deve atingir 26g. Para os outros assentos/sistemas de retenção, o pico de desaceleração deve ocorrer em no máximo 0,06 segundo depois do impacto e deve atingir no mínimo 21g.

(3) Para contar com o empenamento do piso, os trilhos do piso ou dispositivos de fixação, usados para fixar o assento/sistema de retenção à estrutura da célula, devem ser pré-carregados para desalinharem entre si pelo menos 10 graus verticalmente (por exemplo: arfagem sem paralelismo) e um dos trilhos ou dispositivos de fixação devem ser pré-carregados para se desalinharem em 10 graus em rolagem antes de conduzir o ensaio definido pelo parágrafo (b)(2).

(c) Cumprimento com os seguintes requisitos deve se demonstrado durante os ensaios dinâmicos conduzidos de acordo com o parágrafo (b) desta seção:

(1) O assento/sistema de retenção deve restringir o ATD apesar dos componentes do assento/sistema de retenção poderem sofrer deformação, alongamento, deslocamento ou esmagamento previstos no projeto.

(2) A ligação entre o assento/sistema de retenção e os dispositivos de ensaio deve permanecer intacta, apesar da estrutura do assento poder se deformar.

(3) Cada fita do cinto de ombro deve permanecer no ombro do ATD durante o impacto.

(4) O cinto de segurança deve permanecer na pélvis do ATD durante o impacto.

not exceed a head injury criteria (HIC) of 1.000.

(ii) The value of HIC is defined as:

$$HIC = \left\{ (t_2 - t_1) \left[\frac{1}{(t_2 - t_1)} \int_{t_1}^{t_2} a(t) dt \right]^{2.5} \right\}_{Max}$$

Where:

t1 is the initial integration time, expressed in seconds, t2 is the final integration time, expressed in seconds, and a(t) is the total acceleration vs. time curve for the head strike expressed as a multiple of g (units of gravity).

(iii) Compliance with the HIC limit must be demonstrated by measuring the head impact during dynamic testing as prescribed in paragraphs (b)(1) and (b)(2) of this section or by a separate showing of compliance with the head injury criteria using test or analysis procedures.

(6) Loads in individual shoulder harness straps may not exceed 1.750 pounds (7.784 N). If dual straps are used for retaining the upper torso, the total strap loads may not exceed 2.000 pounds (8.896 N).

(7) The compression load measured between the pelvis and the lumbar spine of the ATD may not exceed 1.500 pounds (6.672 N).

(d) For all single-engine airplanes with a VSO of more than 61 knots at maximum weight, and those multiengine airplanes of 6.000 pounds (2.722 kg) or less maximum weight with a VSO of more than 61 knots at maximum weight that do not comply with paragraph 23.67(a)(1);

(1) The ultimate load factors of paragraph 23.561(b) must be increased by multiplying the load factors by the square of the ratio of the increased stall speed to 61 knots. The increased ultimate load factors need not exceed the values reached at a VSO of 79 knots. The

(5) O resultado do ensaio dinâmico deve mostrar que o ocupante é protegido de danos sérios à cabeça.

(i) Quando puder acontecer o contato com as adjacências do assento, com a estrutura, ou com outro item na cabine, deve ser provida proteção para que o impacto da cabeça não exceda o critério de dano à cabeça (HIC) de 1.000.

(ii) O valor do HIC é definido como:

$$HIC = \left\{ (t_2 - t_1) \left[\frac{1}{(t_2 - t_1)} \int_{t_1}^{t_2} a(t) dt \right]^{2.5} \right\}_{Max}$$

Onde:

t1 é o tempo inicial de integração, expresso em segundos, t2 é o tempo final de integração, expresso em segundos, (t2- t1) é o tempo de duração do maior impacto de cabeça, expresso em segundos, e a(t) é a aceleração resultante do centro de gravidade da cabeça expresso na forma de múltiplos de g (unidades de gravidade).

(iii) Cumprimento com o limite de HIC deve ser demonstrado por medida do impacto de cabeça durante o ensaio dinâmico como prescrito nos parágrafos (b)(1) e (b)(2) desta seção ou por uma demonstração de cumprimento separada com o critério de dano à cabeça usando ensaio ou procedimentos de análises.

(6) Cargas em tiras individuais do cinto de ombro não podem exceder 1.750 libras (7.784 N). Se forem usadas tiras duplas para reter o torso superior, as cargas totais nas tiras não podem exceder 2.000 libras (8.896 N).

(7) A carga de compressão medida entre a pélvis e a espinha lombar do ATD não pode exceder 1.500 libras (6.672 N).

(d) Para todo avião monomotor com a Vso maior que 61 nós no peso máximo, e aqueles

upward ultimate load factor for acrobatic category airplanes need not exceed 5.0g.

(2) The seat/restraint system test required by paragraph (b)(1) of this section must be conducted in accordance with the following criteria:

(i) The change in velocity may not be less than 31 feet per second.

(ii)(A) The peak deceleration (g_p) of 19g and 15g must be increased and multiplied by the square of the ratio of the increased stall speed to 61 knots:

$$g_p = 19.0 (V_{S0}/61)^2 \text{ or } g_p = 15.0 (V_{S0}/61)^2$$

(B) The peak deceleration need not exceed the value reached at a V_{S0} of 79 knots.

(iii) The peak deceleration must occur in not more than time (t_r), which must be computed as follows:

$$t_r = \frac{31}{32.2(g_p)} = \frac{.96}{g_p}$$

where:

g_p = The peak deceleration calculated in accordance with paragraph (d)(2)(ii) of this section

t_r = The rise time (in seconds) to the peak deceleration.

(e) An alternate approach that achieves an equivalent, or greater, level of occupant protection to that required by this section may be used if substantiated on a rational basis.

aviões multimotores com 6.000 libras (2.722 kg) ou menor peso máximo com a V_{S0} maior que 61 nós no máximo peso que não cumpre com o parágrafo 23.67(a)(1);

(1) O fator de carga final do parágrafo 23.561 (b) deve ser aumentado pela multiplicação do fator de carga pelo quadrado da razão do incremento da velocidade de estol para 61 nós. O fator de carga final não precisa exceder os valores atingidos até a V_{S0} de 79 nós. O fator de carga final para cima para aviões da categoria acrobática não precisa exceder 5,0 g.

(2) O ensaio do assento/sistema de retenção requerido pelo parágrafo (b)(1) desta seção deve ser conduzido de acordo com o seguinte critério:

(i) A mudança de velocidade não pode ser menor que 31 pés por segundo (34km/h).

(ii)(A) O pico de desaceleração (g_p) de 19g e 15g deve ser aumentado e multiplicado pelo quadrado da razão de incremento da velocidade de estol até 61 nós:

$$g_p = 19,0(V_{S0}/61)^2 \text{ ou } g_p = 15,0(V_{S0}/61)^2$$

(B) O pico de desaceleração não necessita exceder o valor atingido em uma V_{S0} de 79 nós.

(iii) O pico de desaceleração deve ocorrer em no máximo (t_r), o qual deve ser computado como segue:

$$t_r = \frac{31}{32.2(g_p)} = \frac{.96}{g_p}$$

Onde:

g_p = O pico de desaceleração calculado de acordo com o parágrafo (d)(2)(ii) desta seção

t_r = O tempo de aumento do tempo (em segundos) até o pico de desaceleração.

(e) Uma aproximação alternativa que alcance um nível de proteção ao ocupante equivalente,

	ou maior, àquele requerido por esta seção pode ser usada se substanciada numa base racional.
--	--

[Amdt. 23-36, 53 FR 30812, Aug. 15, 1988, as amended by Amdt. 23-44, 58 FR 38639, July 19, 1993; Amdt. 23-50, 61 FR 5192, Feb. 9, 1996; Amdt. 23-62, 76 FR 75756, Dec. 2, 2011]

Fatigue Evaluation

<p>23.571 Metallic pressurized cabin structures.</p> <p>For normal, utility, and acrobatic category airplanes, the strength, detail design, and fabrication of the metallic structure of the pressure cabin must be evaluated under paragraphs (a), (b), or (c). In addition, the requirements of paragraph (d) must be met when applicable.</p> <p>(a) A fatigue strength investigation in which the structure is shown by tests, or by analysis supported by test evidence, to be able to withstand the repeated loads of variable magnitude expected in service; or</p> <p>(b) A fail safe strength investigation, in which it is shown by analysis, tests, or both that catastrophic failure of the structure is not probable after fatigue failure, or obvious partial failure, of a principal structural element, and that the remaining structures are able to withstand a static ultimate load factor of 75 percent of the limit load factor at V_C, considering the combined effects of normal operating pressures, expected external aerodynamic pressures, and flight loads. These loads must be multiplied by a factor of 1.15 unless the dynamic effects of failure under static load are otherwise considered.</p> <p>(c) The damage tolerance evaluation of paragraph 23.573(b).</p> <p>(d) If certification for operation above 41.000 feet is requested, a damage tolerance evaluation of the fuselage pressure boundary per paragraph 23.573(b) must be conducted.</p>	<p>23.571 Estruturas metálicas da cabine pressurizada.</p> <p>Para aviões das categorias normal, utilidade e acrobática, a resistência, as características de projeto e a fabricação de estruturas metálicas empregadas na cabine pressurizada devem ser avaliadas sob os parágrafos (a), (b) ou (c). Além disso, os requisitos do parágrafo (d) devem ser cumpridos quando aplicável.</p> <p>(a) Deve-se fazer uma investigação da resistência a fadiga da estrutura a fim de demonstrar que ela é capaz de resistir a cargas repetitivas de magnitude variável esperadas ocorrerem em serviço. Esta investigação deve ser realizada através de ensaios, ou por análises suportadas por evidências de ensaios; ou</p> <p>(b) Deve-se fazer uma investigação da resistência à falha segura (fail safe), através de análises, ensaios, ou ambos, a fim de demonstrar que não é provável a ocorrência de uma falha catastrófica da estrutura após uma falha por fadiga, ou após uma falha parcial óbvia, de um elemento estrutural principal, e que as estruturas remanescentes são capazes de resistir a um fator de carga estática final de 75 por cento do fator de carga limite na V_C, considerando os efeitos combinados das pressões normais de operação, pressões aerodinâmicas externas esperadas e cargas de voo. Estas cargas devem ser multiplicadas por um fator de 1.15 a menos que os efeitos dinâmicos da falha sob carga estática sejam considerados de alguma outra maneira.</p> <p>(c) Uma avaliação de tolerância ao dano conforme o parágrafo 23.573(b).</p> <p>(d) Se for solicitada certificação para operação acima de 41.000 pés, uma avaliação de</p>
--	---

	tolerância a dano da fronteira da fuselagem sujeita a pressurização, de acordo com o parágrafo 23.573(b), deve ser conduzida.
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-14, 38 FR 31821, Nov. 19, 1973; Amdt. 23-45, 58 FR 42163, Aug. 6, 1993; Amdt. 23-48, 61 FR 5147, Feb. 9, 1996; Amdt. 23-62, 76 FR 75756, Dec. 2, 2011]

§ 23.572 Metallic wing, empennage, and associated structures.

(a) For normal, utility, and acrobatic category airplanes, the strength, detail design, and fabrication of those parts of the airframe structure whose failure would be catastrophic must be evaluated under one of the following unless it is shown that the structure, operating stress level, materials and expected uses are comparable, from a fatigue standpoint, to a similar design that has had extensive satisfactory service experience:

(1) A fatigue strength investigation in which the structure is shown by tests, or by analysis supported by test evidence, to be able to withstand the repeated loads of variable magnitude expected in service; or

(2) A fail-safe strength investigation in which it is shown by analysis, tests, or both, that catastrophic failure of the structure is not probable after fatigue failure, or obvious partial failure, of a principal structural element, and that the remaining structure is able to withstand a static ultimate load factor of 75 percent of the critical limit load factor at V_c . These loads must be multiplied by a factor of 1.15 unless the dynamic effects of failure under static load are otherwise considered.

(3) The damage tolerance evaluation of §23.573(b).

(b) Each evaluation required by this section must—

(1) Include typical loading spectra (e.g. taxi, ground-air-ground cycles, maneuver, gust);

(2) Account for any significant effects due to the mutual influence of aerodynamic surfaces; and

(3) Consider any significant effects from propeller slipstream loading, and buffet from vortex impingements.

[Amdt. 23-7, 34 FR 13090, Aug. 13, 1969, as amended by Amdt. 23-14, 38 FR 31821, Nov. 19, 1973; Amdt. 23-34, 52 FR 1830, Jan. 15, 1987; Amdt. 23-38, 54 FR 39511, Sept. 26, 1989; Amdt. 23-45, 58 FR 42163, Aug. 6, 1993; Amdt. 23-48, 61 FR 5147, Feb. 9, 1996]

§ 23.573 Damage tolerance and fatigue evaluation of structure.

(a) Composite airframe structure. Composite airframe structure must be evaluated under this paragraph instead of §§23.571 and 23.572. The applicant must evaluate the composite airframe structure, the failure of which would result in catastrophic loss of the airplane, in each wing (including canards, tandem wings, and winglets), empennage, their carrythrough and attaching structure, moveable control surfaces and their attaching structure fuselage, and pressure cabin using the damage-tolerance criteria prescribed in paragraphs (a)(1) through (a)(4) of this section unless

shown to be impractical. If the applicant establishes that damage-tolerance criteria is impractical for a particular structure, the structure must be evaluated in accordance with paragraphs (a)(1) and (a)(6) of this section. Where bonded joints are used, the structure must also be evaluated in accordance with paragraph (a)(5) of this section. The effects of material variability and environmental conditions on the strength and durability properties of the composite materials must be accounted for in the evaluations required by this section.

(1) It must be demonstrated by tests, or by analysis supported by tests, that the structure is capable of carrying ultimate load with damage up to the threshold of detectability considering the inspection procedures employed.

(2) The growth rate or no-growth of damage that may occur from fatigue, corrosion, manufacturing flaws or impact damage, under repeated loads expected in service, must be established by tests or analysis supported by tests.

(3) The structure must be shown by residual strength tests, or analysis supported by residual strength tests, to be able to withstand critical limit flight loads, considered as ultimate loads, with the extent of detectable damage consistent with the results of the damage tolerance evaluations. For pressurized cabins, the following loads must be withstood:

(i) Critical limit flight loads with the combined effects of normal operating pressure and expected external aerodynamic pressures.

(ii) The expected external aerodynamic pressures in 1g flight combined with a cabin differential pressure equal to 1.1 times the normal operating differential pressure without any other load.

(4) The damage growth, between initial detectability and the value selected for residual strength demonstrations, factored to obtain inspection intervals, must allow development of an inspection program suitable for application by operation and maintenance personnel.

(5) For any bonded joint, the failure of which would result in catastrophic loss of the airplane, the limit load capacity must be substantiated by one of the following methods—

(i) The maximum disbonds of each bonded joint consistent with the capability to withstand the loads in paragraph (a)(3) of this section must be determined by analysis, tests, or both. Disbonds of each bonded joint greater than this must be prevented by design features; or

(ii) Proof testing must be conducted on each production article that will apply the critical limit design load to each critical bonded joint; or

(iii) Repeatable and reliable non-destructive inspection techniques must be established that ensure the strength of each joint.

(6) Structural components for which the damage tolerance method is shown to be impractical must be shown by component fatigue tests, or analysis supported by tests, to be able to withstand the repeated loads of variable magnitude expected in service. Sufficient component, subcomponent, element, or coupon tests must be done to establish the fatigue scatter factor and the environmental effects. Damage up to the threshold of detectability and ultimate load residual strength capability must be considered in the demonstration.

(b) Metallic airframe structure . If the applicant elects to use §23.571(c) or §23.572(a)(3), then the damage tolerance evaluation must include a determination of the probable locations and modes of damage due to fatigue, corrosion, or accidental damage. Damage at multiple sites due to fatigue must be included where the design is such that this type of damage can be expected to occur. The evaluation must incorporate repeated load and static analyses supported by test evidence. The extent of damage for residual strength evaluation at any time within the operational life of the airplane must be consistent with the initial detectability and subsequent growth under repeated loads. The residual strength evaluation must show that the remaining structure is able to withstand critical limit flight loads, considered as ultimate, with the extent of detectable damage consistent with the results of the damage tolerance evaluations. For pressurized cabins, the following load must be withstood:

(1) The normal operating differential pressure combined with the expected external aerodynamic pressures applied simultaneously with the flight loading conditions specified in this part, and

(2) The expected external aerodynamic pressures in 1g flight combined with a cabin differential pressure equal to 1.1 times the normal operating differential pressure without any other load.

[Doc. No. 26269, 58 FR 42163, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993, as amended by Amdt. 23–48, 61 FR 5147, Feb. 9, 1996; 73 FR 19746, Apr. 11, 2008]

§ 23.574 Metallic damage tolerance and fatigue evaluation of commuter category airplanes.

For commuter category airplanes—

(a) Metallic damage tolerance. An evaluation of the strength, detail design, and fabrication must show that catastrophic failure due to fatigue, corrosion, defects, or damage will be avoided throughout the operational life of the airplane. This evaluation must be conducted in accordance with the provisions of §23.573, except as specified in paragraph (b) of this section, for each part of the structure that could contribute to a catastrophic failure.

(b) Fatigue (safe-life) evaluation. Compliance with the damage tolerance requirements of paragraph (a) of this section is not required if the applicant establishes that the application of those requirements is impractical for a particular structure. This structure must be shown, by analysis supported by test evidence, to be able to withstand the repeated loads of variable magnitude expected during its service life without detectable cracks. Appropriate safe-life scatter factors must be applied.

[Doc. No. 27805, 61 FR 5148, Feb. 9, 1996]

§ 23.575 Inspections and other procedures.

Each inspection or other procedure, based on an evaluation required by §§23.571, 23.572, 23.573 or 23.574, must be established to prevent catastrophic failure and must be included in the Limitations Section of the Instructions for Continued Airworthiness required by §23.1529.

[Doc. No. 27805, 61 FR 5148, Feb. 9, 1996]

Subpart D—Design and Construction

§ 23.601 General.

The suitability of each questionable design detail and part having an important bearing on safety in operations, must be established by tests.

§ 23.603 Materials and workmanship.

(a) The suitability and durability of materials used for parts, the failure of which could adversely affect safety, must—

(1) Be established by experience or tests;

(2) Meet approved specifications that ensure their having the strength and other properties assumed in the design data; and

(3) Take into account the effects of environmental conditions, such as temperature and humidity, expected in service.

(b) Workmanship must be of a high standard.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55464, Dec. 20, 1976; Amdt. 23–23, 43 FR 50592, Oct. 10, 1978]

§ 23.605 Fabrication methods.

(a) The methods of fabrication used must produce consistently sound structures. If a fabrication process (such as gluing, spot welding, or heat-treating) requires close control to reach this objective, the process must be performed under an approved process specification.

(b) Each new aircraft fabrication method must be substantiated by a test program.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–23, 43 FR 50592, Oct. 10, 1978]

§ 23.607 Fasteners.

(a) Each removable fastener must incorporate two retaining devices if the loss of such fastener would preclude continued safe flight and landing.

(b) Fasteners and their locking devices must not be adversely affected by the environmental conditions associated with the particular installation.

(c) No self-locking nut may be used on any bolt subject to rotation in operation unless a non-friction locking device is used in addition to the self-locking device.

[Doc. No. 27805, 61 FR 5148, Feb. 9, 1996]

§ 23.609 Protection of structure.

Each part of the structure must—

(a) Be suitably protected against deterioration or loss of strength in service due to any cause, including—

(1) Weathering;

(2) Corrosion; and

(3) Abrasion; and

(b) Have adequate provisions for ventilation and drainage.

§ 23.611 Accessibility provisions.

For each part that requires maintenance, inspection, or other servicing, appropriate means must be incorporated into the aircraft design to allow such servicing to be accomplished.

[Doc. No. 27805, 61 FR 5148, Feb. 9, 1996]

§ 23.613 Material strength properties and design values.

(a) Material strength properties must be based on enough tests of material meeting specifications to establish design values on a statistical basis.

(b) Design values must be chosen to minimize the probability of structural failure due to material variability. Except as provided in paragraph (e) of this section, compliance with this paragraph must be shown by selecting design values that ensure material strength with the following probability:

(1) Where applied loads are eventually distributed through a single member within an assembly, the failure of which would result in loss of structural integrity of the component; 99 percent probability with 95 percent confidence.

(2) For redundant structure, in which the failure of individual elements would result in applied loads being safely distributed to other load carrying members; 90 percent probability with 95 percent confidence.

(c) The effects of temperature on allowable stresses used for design in an essential component or structure must be considered where thermal effects are significant under normal operating conditions.

(d) The design of the structure must minimize the probability of catastrophic fatigue failure, particularly at points of stress concentration.

(e) Design values greater than the guaranteed minimums required by this section may be used where only guaranteed minimum values are normally allowed if a “premium selection” of the material is made in which a specimen of each individual item is tested before use to determine that the actual strength properties of that particular item will equal or exceed those used in design.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–23, 43 FR 50592, Oct. 30, 1978; Amdt. 23–45, 58 FR 42163, Aug. 6, 1993]

§ 23.619 Special factors.

The factor of safety prescribed in §23.303 must be multiplied by the highest pertinent special factors of safety prescribed in §§23.621 through 23.625 for each part of the structure whose strength is—

- (a) Uncertain;
- (b) Likely to deteriorate in service before normal replacement; or
- (c) Subject to appreciable variability because of uncertainties in manufacturing processes or inspection methods.

[Amdt. 23–7, 34 FR 13091, Aug. 13, 1969]

§ 23.621 Casting factors.

(a) General. The factors, tests, and inspections specified in paragraphs (b) through (d) of this section must be applied in addition to those necessary to establish foundry quality control. The inspections must meet approved specifications. Paragraphs (c) and (d) of this section apply to any structural castings except castings that are pressure tested as parts of hydraulic or other fluid systems and do not support structural loads.

(b) Bearing stresses and surfaces. The casting factors specified in paragraphs (c) and (d) of this section—

- (1) Need not exceed 1.25 with respect to bearing stresses regardless of the method of inspection used; and
- (2) Need not be used with respect to the bearing surfaces of a part whose bearing factor is larger than the applicable casting factor.

(c) Critical castings. For each casting whose failure would preclude continued safe flight and landing of the airplane or result in serious injury to occupants, the following apply:

(1) Each critical casting must either—

- (i) Have a casting factor of not less than 1.25 and receive 100 percent inspection by visual, radiographic, and either magnetic particle, penetrant or other approved equivalent non-destructive inspection method; or
- (ii) Have a casting factor of not less than 2.0 and receive 100 percent visual inspection and 100 percent approved non-destructive inspection. When an approved quality control procedure is established and an acceptable statistical analysis supports reduction, non-destructive inspection may be reduced from 100 percent, and applied on a sampling basis.

(2) For each critical casting with a casting factor less than 1.50, three sample castings must be static tested and shown to meet—

(i) The strength requirements of §23.305 at an ultimate load corresponding to a casting factor of 1.25; and

(ii) The deformation requirements of §23.305 at a load of 1.15 times the limit load.

(3) Examples of these castings are structural attachment fittings, parts of flight control systems, control surface hinges and balance weight attachments, seat, berth, safety belt, and fuel and oil tank supports and attachments, and cabin pressure valves.

(d) Non-critical castings. For each casting other than those specified in paragraph (c) or (e) of this section, the following apply:

(1) Except as provided in paragraphs (d)(2) and (3) of this section, the casting factors and corresponding inspections must meet the following table:

Casting factor	Inspection
2.0 or more	100 percent visual.
Less than 2.0 but more than 1.5	100 percent visual, and magnetic particle or penetrant or equivalent nondestructive inspection methods.
1.25 through 1.50	100 percent visual, magnetic particle or penetrant, and radiographic, or approved equivalent nondestructive inspection methods.

(2) The percentage of castings inspected by nonvisual methods may be reduced below that specified in subparagraph (d)(1) of this section when an approved quality control procedure is established.

(3) For castings procured to a specification that guarantees the mechanical properties of the material in the casting and provides for demonstration of these properties by test of coupons cut from the castings on a sampling basis—

(i) A casting factor of 1.0 may be used; and

(ii) The castings must be inspected as provided in paragraph (d)(1) of this section for casting factors of “1.25 through 1.50” and tested under paragraph (c)(2) of this section.

(e) Non-structural castings. Castings used for non-structural purposes do not require evaluation, testing or close inspection.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42164, Aug. 6, 1993]

§ 23.623 Bearing factors.

(a) Each part that has clearance (free fit), and that is subject to pounding or vibration, must have a bearing factor large enough to provide for the effects of normal relative motion.

(b) For control surface hinges and control system joints, compliance with the factors prescribed in §§23.657 and 23.693, respectively, meets paragraph (a) of this section.

[Amdt. 23-7, 34 FR 13091, Aug. 13, 1969]

§ 23.625 Fitting factors.

For each fitting (a part or terminal used to join one structural member to another), the following apply:

(a) For each fitting whose strength is not proven by limit and ultimate load tests in which actual stress conditions are simulated in the fitting and surrounding structures, a fitting factor of at least 1.15 must be applied to each part of—

- (1) The fitting;
- (2) The means of attachment; and
- (3) The bearing on the joined members.

(b) No fitting factor need be used for joint designs based on comprehensive test data (such as continuous joints in metal plating, welded joints, and scarf joints in wood).

(c) For each integral fitting, the part must be treated as a fitting up to the point at which the section properties become typical of the member.

(d) For each seat, berth, safety belt, and harness, its attachment to the structure must be shown, by analysis, tests, or both, to be able to withstand the inertia forces prescribed in §23.561 multiplied by a fitting factor of 1.33.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13091, Aug. 13, 1969]

§ 23.627 Fatigue strength.

The structure must be designed, as far as practicable, to avoid points of stress concentration where variable stresses above the fatigue limit are likely to occur in normal service.

<p>23.629 Flutter.</p> <p>(a) It must be shown by the methods of paragraph (b) and either paragraph (c) or (d) of this section, that the airplane is free from flutter, control reversal, and divergence for any condition of operation within the limit V-n envelope and at all speeds up to the speed specified for the selected method. In addition:</p> <p>(1) Adequate tolerances must be established for</p>	<p>23.629 Flutter.</p> <p>(a) Deve ser mostrado pelos métodos do parágrafo (b) e também pelos parágrafos (c) ou (d) desta seção, que o avião é livre de flutter, reversão de comandos e divergência para qualquer condição de operação dentro dos limites do envelope V-n e em todas velocidades até a velocidade especificada pelo método selecionado. Em adição:</p>
---	---

<p>quantities which affect flutter, including speed, damping, mass balance, and control system stiffness; and</p> <p>(2) The natural frequencies of main structural components must be determined by vibration tests or other approved methods.</p> <p>(b) Flight flutter tests must be made to show that the airplane is free from flutter, control reversal and divergence and to show that:</p> <p>(1) Proper and adequate attempts to induce flutter have been made within the speed range up to V_D/M_D, or V_{DF}/M_{DF} for jets;</p> <p>(2) The vibratory response of the structure during the test indicates freedom from flutter;</p> <p>(3) A proper margin of damping exists at V_D/M_D, or V_{DF}/M_{DF} for jets; and</p> <p>(4) As V_D/M_D (or V_{DF}/M_{DF} for jets) is approached, there is no large and rapid reduction in damping.</p> <p>(c) Any rational analysis used to predict freedom from flutter, control reversal and divergence must cover all speeds up to $1,2 V_D/1,2 M_D$, limited to Mach 1,0 for subsonic airplanes.</p> <p>(d) Compliance with the rigidity and mass balance criteria (pages 4–12), in Airframe and Equipment Engineering Report No. 45 (as corrected) “Simplified Flutter Prevention Criteria” (published by the Federal Aviation Administration) may be accomplished to show that the airplane is free from flutter, control reversal, or divergence if:</p> <p>(1) V_D/M_D for the airplane is less than 260 knots (EAS) and less than Mach 0,5,</p> <p>(2) The wing and aileron flutter prevention criteria, as represented by the wing torsional stiffness and aileron balance criteria, are limited in use to airplanes without large mass concentrations (such as engines, floats, or fuel</p>	<p>(1) Tolerâncias adequadas devem ser estabelecidas para as quantidades que afetam o flutter, incluindo velocidade, amortecimento, massa de balanceamento, e rigidez do sistema de controle; e</p> <p>(2) As frequências naturais dos principais componentes estruturais devem ser determinadas por ensaios de vibração ou outros métodos aprovados.</p> <p>(b) Ensaios em voo para flutter devem ser feitos para mostrar que o avião é livre de flutter, reversão de comandos e divergência, e para mostrar que:</p> <p>(1) Tentativas adequadas e apropriadas para induzir o flutter foram feitas dentro da faixa de velocidade até a V_D/M_D, ou V_{DF}/M_{DF} para jatos;</p> <p>(2) A resposta vibratória da estrutura durante o ensaio indica ausência de flutter;</p> <p>(3) Uma margem apropriada de amortecimento existe na V_D/M_D, ou V_{DF}/M_{DF} para jatos; e</p> <p>(4) Como V_D/M_D (ou V_{DF}/M_{DF} para jatos) é aproximada, não há redução grande e rápida no amortecimento quando a V_D se aproxima.</p> <p>(c) Qualquer análise racional utilizada para prever ausência de flutter, reversão de comandos e divergência deve cobrir todas as velocidades até $1,2 V_D/1,2 M_D$, limitada ao Mach 1,0 para aviões subsônicos.</p> <p>(d) Cumprimento com o critério de rigidez e massa de balanceamento (páginas 4-12), em “<i>Airframe and Equipment Engineering Report</i>” No.45 (conforme corrigido) “<i>Simplified Flutter Prevention Criteria</i>” (publicado pela <i>Federal Aviation Administration</i>) pode ser feito para mostrar que o avião é livre de flutter, reversão de comandos, ou divergência se:</p> <p>(1) V_D/M_D para o avião é menos do que 260 nós (EAS) e menos do que Mach 0,5,</p>
--	--

<p>tanks in outer wing panels) along the wing span, and</p> <p>(3) The airplane:</p> <p>(i) Does not have a T-tail or other unconventional tail configurations;</p> <p>(ii) Does not have unusual mass distributions or other unconventional design features that affect the applicability of the criteria, and</p> <p>(iii) Has fixed-fin and fixed-stabilizer surfaces.</p> <p>(e) For turbopropeller-powered airplanes, the dynamic evaluation must include:</p> <p>(1) Whirl mode degree of freedom which takes into account the stability of the plane of rotation of the propeller and significant elastic, inertial, and aerodynamic forces, and</p> <p>(2) Propeller, engine, engine mount, and airplane structure stiffness and damping variations appropriate to the particular configuration.</p> <p>(f) Freedom from flutter, control reversal, and divergence up to V_D/M_D must be shown as follows:</p> <p>(1) For airplanes that meet the criteria of paragraphs (d)(1) through (d)(3) of this section, after the failure, malfunction, or disconnection of any single element in any tab control system.</p> <p>(2) For airplanes other than those described in paragraph (f)(1) of this section, after the failure, malfunction, or disconnection of any single element in the primary flight control system, any tab control system, or any flutter damper.</p> <p>(g) For airplanes showing compliance with the fail-safe criteria of sections 23.571 and 23.572, the airplane must be shown by analysis to be free from flutter up to V_D/M_D after fatigue failure, or obvious partial failure, of a principal</p>	<p>(2) Os critérios de prevenção do flutter da asa e do aileron, como representados pelos critérios de rigidez torsional da asa e balanceamento do aileron, são limitados na utilização em aviões sem grandes concentrações de massas (tais como motores, flutuadores, ou tanques de combustíveis nos painéis mais externos da asa) ao longo da longarina da asa, e</p> <p>(3) O avião:</p> <p>(i) Não tem configuração de cauda em T ou outra configuração de cauda não convencional;</p> <p>(ii) Não tem distribuição de massa não usual ou outras características não convencionais que afetam a aplicabilidade do critério, e</p> <p>(iii) Tem superfícies das empenagens vertical e horizontal fixas.</p> <p>(e) Para aviões turbo hélice, a avaliação dinâmica deve incluir:</p> <p>(1) Grau de liberdade para o modo de whirl o qual toma em conta a estabilidade do plano de rotação da hélice e forças significantes aerodinâmicas, elásticas e de inércia, e</p> <p>(2) Hélice, motor, suporte do motor e variações apropriadas de rigidez e amortecimento para a configuração em particular.</p> <p>(f) Ausência de flutter, reversão de comando, e divergências até a V_D/M_D devem ser mostradas como seguem:</p> <p>(1) Para aviões que atendem os critérios dos parágrafos (d)(1) ao (d)(3) desta seção, após a falha, mau funcionamento, ou desconexão de qualquer elemento simples em qualquer sistema de controle do compensador.</p> <p>(2) Para aviões outros que não aqueles descritos no parágrafo (f)(1) desta seção, após a falha, mau funcionamento, ou desconexão de qualquer elemento simples no sistema de controle primário de voo, qualquer sistema de controle de compensador, ou qualquer</p>
--	--

<p>structural element.</p> <p>(h) For airplanes showing compliance with the damage tolerance criteria of section 23.573, the airplane must be shown by analysis to be free from flutter up to V_D/M_D with the extent of damage for which residual strength is demonstrated.</p> <p>(i) For modifications to the type design that could affect the flutter characteristics, compliance with paragraph (a) of this section must be shown, except that analysis based on previously approved data may be used alone to show freedom from flutter, control reversal and divergence, for all speeds up to the speed specified for the selected method.</p>	<p>amortecedor de flutter.</p> <p>(g) Para aviões mostrando cumprimento com o critério de modo de falha segura das seções 23.571 e 23.572, o avião deve mostrar por análise ser livre de flutter até a V_D/M_D após falha de fadiga, ou falha parcial óbvia, de um elemento estrutural principal.</p> <p>(h) Para aviões mostrando cumprimento com o critério de tolerância ao dano da seção 23.573, o avião deve mostrar cumprimento por análise ser livre de flutter até a V_D/M_D com a extensão do dano para a qual a resistência residual é demonstrada.</p> <p>(i) Para modificações ao projeto de tipo que poderiam afetar as características do flutter, cumprimento com o parágrafo (a) desta seção deve ser mostrado, exceto que a análise baseada em dados prévios aprovados pode ser utilizada sozinha para mostrar ausência de flutter, reversão de comandos e divergência, para todas as velocidades até à velocidade especificada para o método selecionado.</p>
---	---

[Amdt. 23-23, 43 FR 50592, Oct. 30, 1978, as amended by Amdt. 23-31, 49 FR 46867, Nov. 28, 1984; Amdt. 23-45, 58 FR 42164, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993; Amdt. 23-48, 61 FR 5148, Feb. 9, 1996; Amdt. 23-62, 76 FR 75756, Dec. 2, 2011]

Wings

§ 23.641 Proof of strength.

The strength of stressed-skin wings must be proven by load tests or by combined structural analysis and load tests.

Control Surfaces

§ 23.651 Proof of strength.

(a) Limit load tests of control surfaces are required. These tests must include the horn or fitting to which the control system is attached.

(b) In structural analyses, rigging loads due to wire bracing must be accounted for in a rational or conservative manner.

§ 23.655 Installation.

(a) Movable surfaces must be installed so that there is no interference between any surfaces, their

bracing, or adjacent fixed structure, when one surface is held in its most critical clearance positions and the others are operated through their full movement.

(b) If an adjustable stabilizer is used, it must have stops that will limit its range of travel to that allowing safe flight and landing.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42164, Aug. 6, 1993]

§ 23.657 Hinges.

(a) Control surface hinges, except ball and roller bearing hinges, must have a factor of safety of not less than 6.67 with respect to the ultimate bearing strength of the softest material used as a bearing.

(b) For ball or roller bearing hinges, the approved rating of the bearing may not be exceeded.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5148, Feb. 9, 1996]

§ 23.659 Mass balance.

The supporting structure and the attachment of concentrated mass balance weights used on control surfaces must be designed for—

(a) 24 g normal to the plane of the control surface;

(b) 12 g fore and aft; and

(c) 12 g parallel to the hinge line.

Control Systems

§ 23.671 General.

(a) Each control must operate easily, smoothly, and positively enough to allow proper performance of its functions.

(b) Controls must be arranged and identified to provide for convenience in operation and to prevent the possibility of confusion and subsequent inadvertent operation.

§ 23.672 Stability augmentation and automatic and power-operated systems.

If the functioning of stability augmentation or other automatic or power-operated systems is necessary to show compliance with the flight characteristics requirements of this part, such systems must comply with §23.671 and the following:

(a) A warning, which is clearly distinguishable to the pilot under expected flight conditions without requiring the pilot's attention, must be provided for any failure in the stability augmentation system or in any other automatic or power-operated system that could result in an unsafe condition if the

pilot was not aware of the failure. Warning systems must not activate the control system.

(b) The design of the stability augmentation system or of any other automatic or power-operated system must permit initial counteraction of failures without requiring exceptional pilot skill or strength, by either the deactivation of the system or a failed portion thereof, or by overriding the failure by movement of the flight controls in the normal sense.

(c) It must be shown that, after any single failure of the stability augmentation system or any other automatic or power-operated system—

(1) The airplane is safely controllable when the failure or malfunction occurs at any speed or altitude within the approved operating limitations that is critical for the type of failure being considered;

(2) The controllability and maneuverability requirements of this part are met within a practical operational flight envelope (for example, speed, altitude, normal acceleration, and airplane configuration) that is described in the Airplane Flight Manual (AFM); and

(3) The trim, stability, and stall characteristics are not impaired below a level needed to permit continued safe flight and landing.

[Doc. No. 26269, 58 FR 42164, Aug. 6, 1993]

§ 23.673 Primary flight controls.

Primary flight controls are those used by the pilot for the immediate control of pitch, roll, and yaw.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–48, 61 FR 5148, Feb. 9, 1996]

§ 23.675 Stops.

(a) Each control system must have stops that positively limit the range of motion of each movable aerodynamic surface controlled by the system.

(b) Each stop must be located so that wear, slackness, or takeup adjustments will not adversely affect the control characteristics of the airplane because of a change in the range of surface travel.

(c) Each stop must be able to withstand any loads corresponding to the design conditions for the control system.

[Amdt. 23–17, 41 FR 55464, Dec. 20, 1976]

§ 23.677 Trim systems.

(a) Proper precautions must be taken to prevent inadvertent, improper, or abrupt trim tab operation. There must be means near the trim control to indicate to the pilot the direction of trim control movement relative to airplane motion. In addition, there must be means to indicate to the pilot the position of the trim device with respect to both the range of adjustment and, in the case of lateral

and directional trim, the neutral position. This means must be visible to the pilot and must be located and designed to prevent confusion. The pitch trim indicator must be clearly marked with a position or range within which it has been demonstrated that take-off is safe for all center of gravity positions and each flap position approved for takeoff.

(b) Trimming devices must be designed so that, when any one connecting or transmitting element in the primary flight control system fails, adequate control for safe flight and landing is available with—

(1) For single-engine airplanes, the longitudinal trimming devices; or

(2) For multiengine airplanes, the longitudinal and directional trimming devices.

(c) Tab controls must be irreversible unless the tab is properly balanced and has no unsafe flutter characteristics. Irreversible tab systems must have adequate rigidity and reliability in the portion of the system from the tab to the attachment of the irreversible unit to the airplane structure.

(d) It must be demonstrated that the airplane is safely controllable and that the pilot can perform all maneuvers and operations necessary to effect a safe landing following any probable powered trim system runaway that reasonably might be expected in service, allowing for appropriate time delay after pilot recognition of the trim system runaway. The demonstration must be conducted at critical airplane weights and center of gravity positions.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13091, Aug. 13, 1969; Amdt. 23–34, 52 FR 1830, Jan. 15, 1987; Amdt. 23–42, 56 FR 353, Jan. 3, 1991; Amdt. 23–49, 61 FR 5165, Feb. 9, 1996]

§ 23.679 Control system locks.

If there is a device to lock the control system on the ground or water:

(a) There must be a means to—

(1) Give unmistakable warning to the pilot when lock is engaged; or

(2) Automatically disengage the device when the pilot operates the primary flight controls in a normal manner.

(b) The device must be installed to limit the operation of the airplane so that, when the device is engaged, the pilot receives unmistakable warning at the start of the takeoff.

(c) The device must have a means to preclude the possibility of it becoming inadvertently engaged in flight.

[Doc. No. 26269, 58 FR 42164, Aug. 6, 1993]

§ 23.681 Limit load static tests.

(a) Compliance with the limit load requirements of this part must be shown by tests in which—

- (1) The direction of the test loads produces the most severe loading in the control system; and
 - (2) Each fitting, pulley, and bracket used in attaching the system to the main structure is included.
- (b) Compliance must be shown (by analyses or individual load tests) with the special factor requirements for control system joints subject to angular motion.

§ 23.683 Operation tests.

(a) It must be shown by operation tests that, when the controls are operated from the pilot compartment with the system loaded as prescribed in paragraph (b) of this section, the system is free from—

- (1) Jamming;
- (2) Excessive friction; and
- (3) Excessive deflection.

(b) The prescribed test loads are—

- (1) For the entire system, loads corresponding to the limit airloads on the appropriate surface, or the limit pilot forces in §23.397(b), whichever are less; and
- (2) For secondary controls, loads not less than those corresponding to the maximum pilot effort established under §23.405.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13091, Aug. 13, 1969]

§ 23.685 Control system details.

(a) Each detail of each control system must be designed and installed to prevent jamming, chafing, and interference from cargo, passengers, loose objects, or the freezing of moisture.

(b) There must be means in the cockpit to prevent the entry of foreign objects into places where they would jam the system.

(c) There must be means to prevent the slapping of cables or tubes against other parts.

(d) Each element of the flight control system must have design features, or must be distinctively and permanently marked, to minimize the possibility of incorrect assembly that could result in malfunctioning of the control system.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55464, Dec. 20, 1976]

§ 23.687 Spring devices.

The reliability of any spring device used in the control system must be established by tests simulating service conditions unless failure of the spring will not cause flutter or unsafe flight characteristics.

§ 23.689 Cable systems.

(a) Each cable, cable fitting, turnbuckle, splice, and pulley used must meet approved specifications. In addition—

- (1) No cable smaller than 1/8 inch diameter may be used in primary control systems;
 - (2) Each cable system must be designed so that there will be no hazardous change in cable tension throughout the range of travel under operating conditions and temperature variations; and
 - (3) There must be means for visual inspection at each fairlead, pulley, terminal, and turnbuckle.
- (b) Each kind and size of pulley must correspond to the cable with which it is used. Each pulley must have closely fitted guards to prevent the cables from being misplaced or fouled, even when slack. Each pulley must lie in the plane passing through the cable so that the cable does not rub against the pulley flange.
- (c) Fairleads must be installed so that they do not cause a change in cable direction of more than three degrees.
- (d) Clevis pins subject to load or motion and retained only by cotter pins may not be used in the control system.
- (e) Turnbuckles must be attached to parts having angular motion in a manner that will positively prevent binding throughout the range of travel.
- (f) Tab control cables are not part of the primary control system and may be less than 1/8 inch diameter in airplanes that are safely controllable with the tabs in the most adverse positions.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13091, Aug. 13, 1969]

§ 23.691 Artificial stall barrier system.

If the function of an artificial stall barrier, for example, stick pusher, is used to show compliance with §23.201(c), the system must comply with the following:

- (a) With the system adjusted for operation, the plus and minus airspeeds at which downward pitching control will be provided must be established.
- (b) Considering the plus and minus airspeed tolerances established by paragraph (a) of this section, an airspeed must be selected for the activation of the downward pitching control that provides a safe margin above any airspeed at which any unsatisfactory stall characteristics occur.
- (c) In addition to the stall warning required §23.07, a warning that is clearly distinguishable to the

pilot under all expected flight conditions without requiring the pilot's attention, must be provided for faults that would prevent the system from providing the required pitching motion.

(d) Each system must be designed so that the artificial stall barrier can be quickly and positively disengaged by the pilots to prevent unwanted downward pitching of the airplane by a quick release (emergency) control that meets the requirements of §23.1329(b).

(e) A preflight check of the complete system must be established and the procedure for this check made available in the Airplane Flight Manual (AFM). Preflight checks that are critical to the safety of the airplane must be included in the limitations section of the AFM.

(f) For those airplanes whose design includes an autopilot system:

(1) A quick release (emergency) control installed in accordance with §23.1329(b) may be used to meet the requirements of paragraph (d), of this section, and

(2) The pitch servo for that system may be used to provide the stall downward pitching motion.

(g) In showing compliance with §23.1309, the system must be evaluated to determine the effect that any announced or unannounced failure may have on the continued safe flight and landing of the airplane or the ability of the crew to cope with any adverse conditions that may result from such failures. This evaluation must consider the hazards that would result from the airplane's flight characteristics if the system was not provided, and the hazard that may result from unwanted downward pitching motion, which could result from a failure at airspeeds above the selected stall speed.

[Doc. No. 27806, 61 FR 5165, Feb. 9, 1996]

§ 23.693 Joints.

Control system joints (in push-pull systems) that are subject to angular motion, except those in ball and roller bearing systems, must have a special factor of safety of not less than 3.33 with respect to the ultimate bearing strength of the softest material used as a bearing. This factor may be reduced to 2.0 for joints in cable control systems. For ball or roller bearings, the approved ratings may not be exceeded.

§ 23.697 Wing flap controls.

(a) Each wing flap control must be designed so that, when the flap has been placed in any position upon which compliance with the performance requirements of this part is based, the flap will not move from that position unless the control is adjusted or is moved by the automatic operation of a flap load limiting device.

(b) The rate of movement of the flaps in response to the operation of the pilot's control or automatic device must give satisfactory flight and performance characteristics under steady or changing conditions of airspeed, engine power, and attitude.

(c) If compliance with §23.145(b)(3) necessitates wing flap retraction to positions that are not fully retracted, the wing flap control lever settings corresponding to those positions must be positively

located such that a definite change of direction of movement of the lever is necessary to select settings beyond those settings.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–49, 61 FR 5165, Feb. 9, 1996]

§ 23.699 Wing flap position indicator.

There must be a wing flap position indicator for—

(a) Flap installations with only the retracted and fully extended position, unless—

(1) A direct operating mechanism provides a sense of “feel” and position (such as when a mechanical linkage is employed); or

(2) The flap position is readily determined without seriously detracting from other piloting duties under any flight condition, day or night; and

(b) Flap installation with intermediate flap positions if—

(1) Any flap position other than retracted or fully extended is used to show compliance with the performance requirements of this part; and

(2) The flap installation does not meet the requirements of paragraph (a)(1) of this section.

§ 23.701 Flap interconnection.

(a) The main wing flaps and related movable surfaces as a system must—

(1) Be synchronized by a mechanical interconnection between the movable flap surfaces that is independent of the flap drive system; or by an approved equivalent means; or

(2) Be designed so that the occurrence of any failure of the flap system that would result in an unsafe flight characteristic of the airplane is extremely improbable; or

(b) The airplane must be shown to have safe flight characteristics with any combination of extreme positions of individual movable surfaces (mechanically interconnected surfaces are to be considered as a single surface).

(c) If an interconnection is used in multiengine airplanes, it must be designed to account for the unsummetrical loads resulting from flight with the engines on one side of the plane of symmetry inoperative and the remaining engines at takeoff power. For single-engine airplanes, and multiengine airplanes with no slipstream effects on the flaps, it may be assumed that 100 percent of the critical air load acts on one side and 70 percent on the other.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31821, Nov. 19, 1973; Amdt. 23–42, 56 FR 353, Jan. 3, 1991; 56 FR 5455, Feb. 11, 1991; Amdt. 23–49, 61 FR 5165, Feb. 9, 1996]

23.703 Takeoff warning system.

For all airplanes with a maximum weight more than 6.000 pounds (2.722 kg) and all jets, unless it can be shown that a lift or longitudinal trim device that affects the takeoff performance of the airplane would not give an unsafe takeoff configuration when selection out of an approved takeoff position, a takeoff warning system must be installed and meet the following requirements:

(a) The system must provide to the pilots an aural warning that is automatically activated during the initial portion of the takeoff role if the airplane is in a configuration that would not allow a safe takeoff. The warning must continue until:

(1) The configuration is changed to allow safe takeoff, or

(2) Action is taken by the pilot to abandon the takeoff roll.

(b) The means used to activate the system must function properly for all authorized takeoff power settings and procedures and throughout the ranges of takeoff weights, altitudes, and temperatures for which certification is requested.

(c) For the purpose of this section, an unsafe takeoff configuration is the inability to rotate or the inability to prevent an immediate stall after rotation.

23.703 Sistema de alerta de decolagem.

Para todos os aviões com o peso máximo maior que 6.000lb (2.722 kg) e todos os jatos, a menos que possa ser demonstrado que um dispositivo de aumento de sustentação ou de compensação longitudinal que afete o desempenho de decolagem do avião não resulte em uma condição insegura para a configuração de decolagem quando selecionado fora de uma posição aprovada para decolagem, um sistema de alerta de decolagem deve ser instalado e atender aos seguintes requisitos:

(a) O sistema deve fornecer aos pilotos um alarme sonoro que seja automaticamente ativado durante a parte inicial da corrida de decolagem se o avião estiver em uma configuração que não permita uma decolagem segura. O alarme deve continuar até que:

(1) A configuração seja alterada para permitir decolagem segura, ou

(2) Ação seja tomada pelo piloto para abortar a corrida de decolagem.

(b) Os meios utilizados para ativar o sistema devem funcionar apropriadamente para todos os regimes de potência de decolagem, procedimentos e em todos os envelopes de peso de decolagem, altitude e temperatura para os quais a certificação seja requerida.

(c) Para o propósito desta seção, uma configuração de decolagem insegura é a incapacidade de rotacionar ou a incapacidade de evitar um estol imediato após a rotação.

[Doc. No. 27806, 61 FR 5166, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75757, Dec. 2, 2011]

Landing Gear**§ 23.721 General.**

For commuter category airplanes that have a passenger seating configuration, excluding pilot seats, of 10 or more, the following general requirements for the landing gear apply:

- (a) The main landing-gear system must be designed so that if it fails due to overloads during takeoff and landing (assuming the overloads to act in the upward and aft directions), the failure mode is not likely to cause the spillage of enough fuel from any part of the fuel system to constitute a fire hazard.
- (b) Each airplane must be designed so that, with the airplane under control, it can be landed on a paved runway with any one or more landing-gear legs not extended without sustaining a structural component failure that is likely to cause the spillage of enough fuel to constitute a fire hazard.
- (c) Compliance with the provisions of this section may be shown by analysis or tests, or both.

[Amdt. 23–34, 52 FR 1830, Jan. 15, 1987]

§ 23.723 Shock absorption tests.

(a) It must be shown that the limit load factors selected for design in accordance with §23.473 for takeoff and landing weights, respectively, will not be exceeded. This must be shown by energy absorption tests except that analysis based on tests conducted on a landing gear system with identical energy absorption characteristics may be used for increases in previously approved takeoff and landing weights.

(b) The landing gear may not fail, but may yield, in a test showing its reserve energy absorption capacity, simulating a descent velocity of 1.2 times the limit descent velocity, assuming wing lift equal to the weight of the airplane.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–23, 43 FR 50593, Oct. 30, 1978; Amdt. 23–49, 61 FR 5166, Feb. 9, 1996]

§ 23.725 Limit drop tests.

(a) If compliance with §23.723(a) is shown by free drop tests, these tests must be made on the complete airplane, or on units consisting of wheel, tire, and shock absorber, in their proper relation, from free drop heights not less than those determined by the following formula:

$$h \text{ (inches)} = 3.6 (W/S)^{1/2}$$

However, the free drop height may not be less than 9.2 inches and need not be more than 18.7 inches.

(b) If the effect of wing lift is provided for in free drop tests, the landing gear must be dropped with an effective weight equal to

$$W_e = W \frac{[h + (1 - L)d]}{(h + d)}$$

where—

W_e = the effective weight to be used in the drop test (lbs.);

h =specified free drop height (inches);

d =deflection under impact of the tire (at the approved inflation pressure) plus the vertical component of the axle travel relative to the drop mass (inches);

W_M =weight for main gear units (lbs), equal to the static weight on that unit with the airplane in the level attitude (with the nose wheel clear in the case of nose wheel type airplanes);

W_T =weight for tail gear units (lbs.), equal to the static weight on the tail unit with the airplane in the tail-down attitude;

W_N =weight for nose wheel units (lbs.), equal to the vertical component of the static reaction that would exist at the nose wheel, assuming that the mass of the airplane acts at the center of gravity and exerts a force of 1.0 g downward and 0.33 g forward; and

L = the ratio of the assumed wing lift to the airplane weight, but not more than 0.667.

(c) The limit inertia load factor must be determined in a rational or conservative manner, during the drop test, using a landing gear unit attitude, and applied drag loads, that represent the landing conditions.

(d) The value of d used in the computation of W_e in paragraph (b) of this section may not exceed the value actually obtained in the drop test.

(e) The limit inertia load factor must be determined from the drop test in paragraph (b) of this section according to the following formula:

$$n = n_j \frac{W_e}{W} + L$$

where—

n_j =the load factor developed in the drop test (that is, the acceleration (dv/dt) in g s recorded in the drop test) plus 1.0; and

W_e , W , and L are the same as in the drop test computation.

(f) The value of n determined in accordance with paragraph (e) may not be more than the limit inertia load factor used in the landing conditions in §23.473.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13091, Aug. 13, 1969; Amdt. 23–48, 61 FR 5148, Feb. 9, 1996]

§ 23.726 Ground load dynamic tests.

(a) If compliance with the ground load requirements of §§23.479 through 23.483 is shown dynamically by drop test, one drop test must be conducted that meets §23.725 except that the drop height must be—

- (1) 2.25 times the drop height prescribed in §23.725(a); or
 - (2) Sufficient to develop 1.5 times the limit load factor.
- (b) The critical landing condition for each of the design conditions specified in §§23.479 through 23.483 must be used for proof of strength.

[Amdt. 23–7, 34 FR 13091, Aug. 13, 1969]

§ 23.727 Reserve energy absorption drop test.

- (a) If compliance with the reserve energy absorption requirement in §23.723(b) is shown by free drop tests, the drop height may not be less than 1.44 times that specified in §23.725.
- (b) If the effect of wing lift is provided for, the units must be dropped with an effective mass equal to $W_e = Wh/(h+d)$, when the symbols and other details are the same as in §23.725.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13091, Aug. 13, 1969]

§ 23.729 Landing gear extension and retraction system.

- (a) General. For airplanes with retractable landing gear, the following apply:
- (1) Each landing gear retracting mechanism and its supporting structure must be designed for maximum flight load factors with the gear retracted and must be designed for the combination of friction, inertia, brake torque, and air loads, occurring during retraction at any airspeed up to $1.6 V_{S1}$ with flaps retracted, and for any load factor up to those specified in §23.345 for the flaps-extended condition.
 - (2) The landing gear and retracting mechanism, including the wheel well doors, must withstand flight loads, including loads resulting from all yawing conditions specified in §23.351, with the landing gear extended at any speed up to at least $1.6 V_{S1}$ with the flaps retracted.
- (b) Landing gear lock. There must be positive means (other than the use of hydraulic pressure) to keep the landing gear extended.
- (c) Emergency operation. For a landplane having retractable landing gear that cannot be extended manually, there must be means to extend the landing gear in the event of either—
- (1) Any reasonably probable failure in the normal landing gear operation system; or
 - (2) Any reasonably probable failure in a power source that would prevent the operation of the normal landing gear operation system.
- (d) Operation test. The proper functioning of the retracting mechanism must be shown by operation tests.
- (e) Position indicator. If a retractable landing gear is used, there must be a landing gear position

indicator (as well as necessary switches to actuate the indicator) or other means to inform the pilot that each gear is secured in the extended (or retracted) position. If switches are used, they must be located and coupled to the landing gear mechanical system in a manner that prevents an erroneous indication of either “down and locked” if each gear is not in the fully extended position, or “up and locked” if each landing gear is not in the fully retracted position.

(f) Landing gear warning. For landplanes, the following aural or equally effective landing gear warning devices must be provided:

(1) A device that functions continuously when one or more throttles are closed beyond the power settings normally used for landing approach if the landing gear is not fully extended and locked. A throttle stop may not be used in place of an aural device. If there is a manual shutoff for the warning device prescribed in this paragraph, the warning system must be designed so that when the warning has been suspended after one or more throttles are closed, subsequent retardation of any throttle to, or beyond, the position for normal landing approach will activate the warning device.

(2) A device that functions continuously when the wing flaps are extended beyond the maximum approach flap position, using a normal landing procedure, if the landing gear is not fully extended and locked. There may not be a manual shutoff for this warning device. The flap position sensing unit may be installed at any suitable location. The system for this device may use any part of the system (including the aural warning device) for the device required in paragraph (f)(1) of this section.

(g) Equipment located in the landing gear bay. If the landing gear bay is used as the location for equipment other than the landing gear, that equipment must be designed and installed to minimize damage from items such as a tire burst, or rocks, water, and slush that may enter the landing gear bay.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13091, Aug. 13, 1969; Amdt. 23–21, 43 FR 2318, Jan. 1978; Amdt. 23–26, 45 FR 60171, Sept. 11, 1980; Amdt. 23–45, 58 FR 42164, Aug. 6, 1993; Amdt. 23–49, 61 FR 5166, Feb. 9, 1996]

§ 23.731 Wheels.

(a) The maximum static load rating of each wheel may not be less than the corresponding static ground reaction with—

(1) Design maximum weight; and

(2) Critical center of gravity.

(b) The maximum limit load rating of each wheel must equal or exceed the maximum radial limit load determined under the applicable ground load requirements of this part.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42165, Aug. 6, 1993]

§ 23.733 Tires.

(a) Each landing gear wheel must have a tire whose approved tire ratings (static and dynamic) are not exceeded—

(1) By a load on each main wheel tire) to be compared to the static rating approved for such tires) equal to the corresponding static ground reaction under the design maximum weight and critical center of gravity; and

(2) By a load on nose wheel tires (to be compared with the dynamic rating approved for such tires) equal to the reaction obtained at the nose wheel, assuming the mass of the airplane to be concentrated at the most critical center of gravity and exerting a force of 1.0 W downward and 0.31 W forward (where W is the design maximum weight), with the reactions distributed to the nose and main wheels by the principles of statics and with the drag reaction at the ground applied only at wheels with brakes.

(b) If specially constructed tires are used, the wheels must be plainly and conspicuously marked to that effect. The markings must include the make, size, number of plies, and identification marking of the proper tire.

(c) Each tire installed on a retractable landing gear system must, at the maximum size of the tire type expected in service, have a clearance to surrounding structure and systems that is adequate to prevent contact between the tire and any part of the structure of systems.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13092, Aug. 13, 1969; Amdt. 23–17, 41 FR 55464, Dec. 20, 1976; Amdt. 23–45, 58 FR 42165, Aug. 6, 1993]

<p>23.735 Brakes.</p> <p>(a) Brakes must be provided. The landing brake kinetic energy capacity rating of each main wheel brake assembly must not be less than the kinetic energy absorption requirements determined under either of the following methods:</p> <p>(1) The brake kinetic energy absorption requirements must be based on a conservative rational analysis of the sequence of events expected during landing at the design landing weight.</p> <p>(2) Instead of a rational analysis, the kinetic energy absorption requirements for each main wheel brake assembly may be derived from the following formula:</p> $KE=0.0443 WV^2 /N$	<p>23.735 Freios.</p> <p>(a) Freios devem ser providos. A estimativa da capacidade de energia cinética de frenagem no pouso de cada conjunto de freio não pode ser menor do que os requisitos de absorção de energia cinética determinados segundo um dos seguintes métodos a seguir:</p> <p>(1) Os requisitos de absorção de energia cinética do freio devem ser baseados em uma análise racional conservativa de uma sequência de eventos esperados durante o pouso no peso de pouso de projeto.</p> <p>(2) Ao invés de uma análise racional, os requisitos de absorção de energia cinética para cada conjunto de freio principal podem ser derivados da seguinte fórmula:</p> $KE=0.0443 WV^2 /N$
--	---

<p>where:</p> <p>KE=Kinetic energy per wheel (ft.-lb.);</p> <p>W=Design landing weight (lb.);</p> <p>V=Airplane speed in knots. V must be not less than $VS \sqrt{}$, the poweroff stalling speed of the airplane at sea level, at the design landing weight, and in the landing configuration; and</p> <p>N=Number of main wheels with brakes.</p> <p>(b) Brakes must be able to prevent the wheels from rolling on a paved runway with takeoff power on the critical engine, but need not prevent movement of the airplane with wheels locked.</p> <p>(c) During the landing distance determination required by section 23.75 of this RBAC, the pressure on the wheel braking system must not exceed the pressure specified by the brake manufacturer.</p> <p>(d) If antiskid devices are installed, the devices and associated systems must be designed so that no single probable malfunction or failure will result in a hazardous loss of braking ability or directional control of the airplane.</p> <p>(e) For airplanes required to meet section 23.55 of this RBAC, the rejected takeoff brake kinetic energy capacity rating of each main wheel brake assembly may not be less than the kinetic energy absorption requirements determined under either of the following methods:</p> <p>(1) The brake kinetic energy absorption requirements must be based on a conservative rational analysis of the sequence of events expected during a rejected takeoff at the design takeoff weight.</p> <p>(2) Instead of a rational analysis, the kinetic energy absorption requirements for each main wheel brake assembly may be derived from the</p>	<p>Tal que:</p> <p>KE=Energia cinética por roda(s) com freios (ft.-lb.);</p> <p>W= Massa de pouso de projeto (lb.);</p> <p>V=Velocidade do avião em nós. V não pode ser menor do que $VS \sqrt{}$, velocidade de estol sem tração de potência do avião o nível do mar, no peso de pouso de projeto e na configuração para pouso; e</p> <p>N=Número de rodas com freios principais.</p> <p>(b) Os freios devem ser capazes de evitar que as rodas rolem em uma pista pavimentada com potência de decolagem no motor crítico, mas não é necessário que evite o movimento do avião com as rodas travadas.</p> <p>(c) Durante a determinação da distância de pouso requerida pela seção 23.75 deste RBAC, a pressão no sistema de frenagem da roda não pode exceder a pressão especificada pelo fabricante do freio.</p> <p>(d) Se dispositivos de anti-derrapagem são instalados, os dispositivos e sistemas associados devem ser projetados, tal que nenhuma provável falha ou mau funcionamento simples não resultará em uma perda de consequências perigosas da capacidade de frenagem ou controle direcional do avião.</p> <p>(e) Para aviões requeridos a cumprir com a seção 23.55 deste RBAC, a estimativa da capacidade de energia cinética de frenagem em uma decolagem abortada de cada conjunto principal de freio não pode ser menor do que os requisitos de absorção de energia cinética determinados segundo um dos seguintes métodos:</p> <p>(1) Os requisitos de absorção de energia cinética do freio devem ser baseados em análises racionais conservativas de uma sequência de eventos esperados durante a decolagem abortada no peso de decolagem de</p>
--	--

<p>following formula:</p> $KE=0.0443 WV^2/N$ <p>where;</p> <p>KE=Kinetic energy per wheel (ft.-lbs.);</p> <p>W=Design takeoff weight (lbs.);</p> <p>V=Ground speed, in knots, associated with the maximum value of V1 selected in accordance with paragraph 23.51(c)(1) of this RBAC;</p> <p>N=Number of main wheels with brakes.</p>	<p>projeto.</p> <p>(2) Ao invés de uma análise racional, os requisitos de absorção de energia cinética para cada conjunto de freio principal podem ser derivados da seguinte fórmula:</p> $KE=0,0443 WV^2 /N$ <p>tal que:</p> <p>KE=Energia cinética por roda(s) com freios (ft.-lb.);</p> <p>W= Massa de pouso de projeto (lb.);</p> <p>V=Velocidade em solo, em nós, associada com o máximo valor de V1 selecionado de acordo com o parágrafo 23.51(c)(1) deste RBAC;</p> <p>N=Número de rodas principais com freios.</p>
---	---

[Amdt. 23-7, 34 FR 13092, Aug. 13, 1969, as amended by Amdt. 23-24, 44 FR 68742, Nov. 29, 1979; Amdt. 23-42, 56 FR 354, Jan. 3, 1991; Amdt. 23-49, 61 FR 5166, Feb. 9, 1996; Amdt. 23-62, 76 FR 75757, Dec. 2, 2011]

§ 23.737 Skis.

The maximum limit load rating for each ski must equal or exceed the maximum limit load determined under the applicable ground load requirements of this part.

[Doc. No. 26269, 58 FR 42165, Aug. 6, 1993]

§ 23.745 Nose/tail wheel steering.

(a) If nose/tail wheel steering is installed, it must be demonstrated that its use does not require exceptional pilot skill during takeoff and landing, in crosswinds, or in the event of an engine failure; or its use must be limited to low speed maneuvering.

(b) Movement of the pilot's steering control must not interfere with the retraction or extension of the landing gear.

[Doc. No. 27806, 61 FR 5166, Feb. 9, 1996]

Floats and Hulls

§ 23.751 Main float buoyancy.

(a) Each main float must have—

- (1) A buoyancy of 80 percent in excess of the buoyancy required by that float to support its portion of the maximum weight of the seaplane or amphibian in fresh water; and
 - (2) Enough watertight compartments to provide reasonable assurance that the seaplane or amphibian will stay afloat without capsizing if any two compartments of any main float are flooded.
- (b) Each main float must contain at least four watertight compartments approximately equal in volume.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42165, Aug. 6, 1993]

§ 23.753 Main float design.

Each seaplane main float must meet the requirements of §23.521.

[Doc. No. 26269, 58 FR 42165, Aug. 6, 1993]

§ 23.755 Hulls.

(a) The hull of a hull seaplane or amphibian of 1,500 pounds or more maximum weight must have watertight compartments designed and arranged so that the hull auxiliary floats, and tires (if used), will keep the airplane afloat without capsizing in fresh water when—

- (1) For airplanes of 5,000 pounds or more maximum weight, any two adjacent compartments are flooded; and
 - (2) For airplanes of 1,500 pounds up to, but not including, 5,000 pounds maximum weight, any single compartment is flooded.
- (b) Watertight doors in bulkheads may be used for communication between compartments.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42165, Aug. 6, 1993; Amdt. 23–48, 61 FR 5148, Feb. 9, 1996]

§ 23.757 Auxiliary floats.

Auxiliary floats must be arranged so that, when completely submerged in fresh water, they provide a righting moment of at least 1.5 times the upsetting moment caused by the seaplane or amphibian being tilted.

Personnel and Cargo Accommodations

§ 23.771 Pilot compartment.

For each pilot compartment—

- (a) The compartment and its equipment must allow each pilot to perform his duties without unreasonable concentration or fatigue;

(b) Where the flight crew are separated from the passengers by a partition, an opening or openable window or door must be provided to facilitate communication between flight crew and the passengers; and

(c) The aerodynamic controls listed in §23.779, excluding cables and control rods, must be located with respect to the propellers so that no part of the pilot or the controls lies in the region between the plane of rotation of any inboard propeller and the surface generated by a line passing through the center of the propeller hub making an angle of 5 degrees forward or aft of the plane of rotation of the propeller.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31821, Nov. 19, 1973]

<p>23.773 Pilot compartment view.</p> <p>(a) Each pilot compartment must be:</p> <p>(1) Arranged with sufficiently extensive, clear and undistorted view to enable the pilot to safely taxi, takeoff, approach, land, and perform any maneuvers within the operating limitations of the airplane.</p> <p>(2) Free from glare and reflections that could interfere with the pilot's vision. Compliance must be shown in all operations for which certification is requested; and</p> <p>(3) Designed so that each pilot is protected from the elements so that moderate rain conditions do not unduly impair the pilot's view of the flight path in normal flight and while landing.</p> <p>(b) Each pilot compartment must have a means to either remove or prevent the formation of fog or frost on an area of the internal portion of the windshield and side windows sufficiently large to provide the view specified in paragraph (a)(1) of this section. Compliance must be shown under all expected external and internal ambient operating conditions, unless it can be shown that the windshield and side windows can be easily cleared by the pilot without interruption of normal pilot duties.</p> <p>(c) A vision system with a transparent display surface located in the pilot's outside field of view, such as a head up-display, head mounted</p>	<p>23.773 Visibilidade da cabine de pilotagem.</p> <p>(a) Cada cabine de pilotagem deve ser:</p> <p>(1) Organizada com visão suficientemente ampla, clara e sem distorções para permitir que o piloto, com segurança, taxie, decole, aproxime, pouse, e realize qualquer manobra dentro das limitações operacionais do avião.</p> <p>(2) Livre de brilhos e reflexos que possam interferir com a visão do piloto. O cumprimento deve ser demonstrado em todas as operações para as quais a certificação é solicitada;</p> <p>(3) Projetada de modo que cada piloto esteja protegido dos elementos de modo que as condições de chuva moderada não prejudiquem indevidamente a visão do piloto da trajetória de vôo, em vôo normal e enquanto pousa.</p> <p>(b) Cada cabine de pilotagem deve ter um meio de remover ou evitar embaçamento ou congelamento em uma área da parte interna do pára-brisas e janelas laterais suficientemente grande para fornecer a visão especificada na alínea (a)(1) desta seção. O cumprimento deve ser demonstrado em todas as condições ambientais internas e externas de funcionamento esperadas, a menos que possa ser demonstrado que o pára-brisas e janelas laterais podem ser facilmente limpos pelo piloto, sem interrupção de suas funções normais.</p>
--	---

<p>display, or other equivalent display, must meet the following requirements:</p> <p>(1) While the vision system display is in operation, it must compensate for interference with the pilot's outside field of view such that the combination of what is visible in the display and what remains visible through and around it, enables the pilot to perform the maneuvers specified in paragraph (a)(1) of this section and the pilot compartment to meet the provisions of paragraph (a)(2) of this section.</p> <p>(2) The pilot's view of the external scene may not be distorted by the transparent display surface or by the vision system imagery. When the vision system displays imagery and any symbology referenced to the imagery and outside scene topography, including attitude symbology, flight path vector, and flight path angle reference cue, that imagery and symbology must be aligned with, and scaled to, the external scene.</p> <p>(3) The vision system must provide a means to allow the pilot using the display to immediately deactivate and reactivate the vision system imagery, on demand, without removing the pilot's hands from the primary flight controls or thrust controls.</p> <p>(4) When the vision system is not in operation it may not restrict the pilot from performing the maneuvers specified in paragraph (a)(1) of this section and the pilot compartment from meeting the provisions of paragraph (a)(2) of this section.</p>	<p>(c) Um sistema de visão com uma superfície transparente de display localizada no campo de visão exterior do piloto, como um head-up display, display montado na cabeça ou outro display equivalente, deve satisfazer os seguintes requisitos:</p> <p>(1) Enquanto o display do sistema de visão estiver em operação, ele deve compensar a interferência no campo de visão externa do piloto de forma que a combinação do que é visível no display e o que permanece visível através e ao redor do display permita que o piloto realize as manobras especificadas no parágrafo (a)(1) desta seção e o compartimento do piloto satisfaça as provisões do parágrafo (a)(2) desta seção.</p> <p>(2) A visão do piloto da cena externa não pode ser distorcida pela superfície transparente do display ou pela imagem do sistema de visão. Quando o sistema de visão apresentar imagem e qualquer símbolo relacionada à imagem e à topografia da cena externa, incluindo simbologia de altitude, vetor de trajetória de voo e indicador de referência de ângulo da trajetória de voo, aquela imagem e símbolo deve estar alinhada e proporcional à cena externa.</p> <p>(3) O sistema de visão deve fornecer um meio para que o piloto usando o display seja capaz de imediatamente desativar e reativar a imagem, a pedido, sem remover as mãos do piloto dos controles primários de voo ou controles de empuxo.</p> <p>(4) Quando o sistema de visão não estiver em operação, ele não pode restringir o piloto de ser capaz de realizar as manobras específicas no parágrafo (a)(1) desta seção e o compartimento do piloto de satisfazer as provisões do parágrafo (a)(2) desta seção.</p>
---	---

[Doc. No. 26269, 58 FR 42165, Aug. 6, 1993; 71 FR 537, Jan. 5, 2006; Docket FAA-2013-0485, Amdt. 23-63, 81 FR 90169, Dec. 13, 2016]

§ 23.775 Windshields and windows.

- (a) The internal panels of windshields and windows must be constructed of a nonsplintering material, such as nonsplintering safety glass.
- (b) The design of windshields, windows, and canopies in pressurized airplanes must be based on factors peculiar to high altitude operation, including—
- (1) The effects of continuous and cyclic pressurization loadings;
 - (2) The inherent characteristics of the material used; and
 - (3) The effects of temperatures and temperature gradients.
- (c) On pressurized airplanes, if certification for operation up to and including 25,000 feet is requested, an enclosure canopy including a representative part of the installation must be subjected to special tests to account for the combined effects of continuous and cyclic pressurization loadings and flight loads, or compliance with the fail-safe requirements of paragraph (d) of this section must be shown.
- (d) If certification for operation above 25,000 feet is requested the windshields, window panels, and canopies must be strong enough to withstand the maximum cabin pressure differential loads combined with critical aerodynamic pressure and temperature effects, after failure of any load-carrying element of the windshield, window panel, or canopy.
- (e) The windshield and side windows forward of the pilot's back when the pilot is seated in the normal flight position must have a luminous transmittance value of not less than 70 percent.
- (f) Unless operation in known or forecast icing conditions is prohibited by operating limitations, a means must be provided to prevent or to clear accumulations of ice from the windshield so that the pilot has adequate view for taxi, takeoff, approach, landing, and to perform any maneuvers within the operating limitations of the airplane.
- (g) In the event of any probable single failure, a transparency heating system must be incapable of raising the temperature of any windshield or window to a point where there would be—
- (1) Structural failure that adversely affects the integrity of the cabin; or
 - (2) There would be a danger of fire.
- (h) In addition, for commuter category airplanes, the following applies:
- (1) Windshield panes directly in front of the pilots in the normal conduct of their duties, and the supporting structures for these panes, must withstand, without penetration, the impact of a two-pound bird when the velocity of the airplane (relative to the bird along the airplane's flight path) is equal to the airplane's maximum approach flap speed.
 - (2) The windshield panels in front of the pilots must be arranged so that, assuming the loss of vision through any one panel, one or more panels remain available for use by a pilot seated at a pilot

station to permit continued safe flight and landing.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13092, Aug. 13, 1969; Amdt. 23–45, 58 FR 42165, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993; Amdt. 23–49, 61 FR 5166, Feb. 9, 1996]

23.777 Cockpit controls.	23.777 Controles de cabine de comando.
<p>(a) Each cockpit control must be located and (except where its function is obvious) identified to provide convenient operation and to prevent confusion and inadvertent operation.</p> <p>(b) The controls must be located and arranged so that the pilot, when seated, has full and unrestricted movement of each control without interference from either his clothing or the cockpit structure.</p> <p>(c) Powerplant controls must be located:</p> <p>(1) For multiengine airplanes, on the pedestal or overhead at or near the center of the cockpit;</p> <p>(2) For single and tandem seated single-engine airplanes, on the left side console or instrument panel;</p> <p>(3) For other single-engine airplanes at or near the center of the cockpit, on the pedestal, instrument panel, or overhead; and</p> <p>(4) For airplanes, with side-by-side pilot seats and with two sets of powerplant controls, on left and right consoles.</p> <p>(d) When separate and distinct control levers are co-located (such as located together on the pedestal), the control location order from left to right must be power (thrust) lever, propeller (rpm control), and mixture control (condition lever and fuel cut-off for turbine-powered airplanes). Power (thrust) levers must be easily distinguishable from other controls, and provide for accurate, consistent operation. Carburetor heat or alternate air control must be to the left of the throttle or at least eight inches (203,2 mm) from the mixture control when located other than on a pedestal. Carburetor</p>	<p>(a) Cada controle da cabine de comando deve estar localizado e (exceto quando sua função é óbvia) identificado para prover operação conveniente e evitar confusão e operação inadvertida.</p> <p>(b) Os controles devem estar localizados e organizados de modo que o piloto, quando sentado, tenha acesso completo e irrestrito de cada controle sem interferência de sua vestimenta ou da estrutura da cabine de comando.</p> <p>(c) Os controles do grupo motopropulsor devem estar localizados:</p> <p>(1) Para aviões multimotores, no pedestal ou no painel superior no centro ou próximo ao centro da cabine de comando;</p> <p>(2) Para aviões monomotores monoposto ou com assentos em “tandem”, no console esquerdo ou painel de instrumentos;</p> <p>(3) Para os outros aviões monomotores no centro ou próximo ao centro da cabine de comando, no pedestal, no painel de instrumento, ou no painel superior; e</p> <p>(4) Para aviões, com assentos de piloto lado a lado e com dois conjuntos de controle do grupo motopropulsor, nos consoles esquerdo e direito.</p> <p>(d) Quando alavancas de controle separadas e distintas estão co-localizadas (como no caso de estar localizadas juntas no pedestal), a ordem de localização dos controles da esquerda para a direita deve ser manete de potência (tração), hélice (controle de RPM), e controle de mistura (manete de condição e corte de combustível para aviões turbo hélices). Os manetes de</p>

heat or alternate air control, when located on a pedestal, must be aft or below the power (thrust) lever. Supercharger controls must be located below or aft of the propeller controls. Airplanes with tandem seating or single-place airplanes may utilize control locations on the left side of the cabin compartment; however, location order from left to right must be power (thrust) lever, propeller (rpm control), and mixture control.

(e) Identical powerplant controls for each engine must be located to prevent confusion as to the engines they control.

(1) Conventional multiengine powerplant controls must be located so that the left control(s) operates the left engine(s) and the right control(s) operates the right engine(s).

(2) On twin-engine airplanes with front and rear engine locations (tandem), the left powerplant controls must operate the front engine and the right powerplant controls must operate the rear engine.

(f) Wing flap and auxiliary lift device controls must be located:

(1) Centrally, or to the right of the pedestal or powerplant throttle control centerline; and

(2) Far enough away from the landing gear control to avoid confusion.

(g) The landing gear control must be located to the left of the throttle centerline or pedestal centerline.

(h) Each fuel feed selector control must comply with section 23.995 and be located and arranged so that the pilot can see and reach it without moving any seat or primary flight control when his seat is at any position in which it can be placed.

(1) For a mechanical fuel selector:

(i) The indication of the selected fuel valve

potência (tração) devem ser facilmente distinguíveis dos outros controles, e prover operação acurada e consistente. O controle do aquecimento do carburador ou controle da entrada alternativa de ar deve estar a esquerda do manete de potência ou pelo menos oito polegadas (203,2 mm) do manete de mistura quando localizado fora do pedestal. O controle do aquecimento do carburador ou controle da entrada alternativa de ar, quando localizado num pedestal deve estar atrás ou abaixo dos manetes de potência (tração). Os controles do superalimentador devem estar localizados abaixo ou atrás dos controles de hélice. Os aviões com assentos em “tandem” ou aviões monopostos podem utilizar as posições dos controles no lado esquerdo do compartimento da cabine; entretanto, a ordem de posicionamento da esquerda para a direita deve ser manete de potência (tração), hélice (controle de RPM) e controle de mistura.

(e) Os controles do grupo motopropulsor idênticos para cada motor devem estar localizados de modo a evitar confusão sobre qual motor controlam.

(1) Os controles do grupo motopropulsor multimotores convencionais devem estar localizados de modo que o(s) controle(s) da esquerda opere(m) o(s) motor(es) da esquerda e o(s) controle(s) da direita opere(m) o(s) motor(es) da direita.

(2) Os aviões bimotores com motores localizados à frente e atrás (tandem), os controles do grupo motopropulsor esquerdo devem operar o motor dianteiro e os controles do grupo motopropulsor direito devem operar o motor traseiro.

(f) Os controles de flap da asa e dispositivo auxiliar de sustentação devem estar localizados:

(1) No centro, ou à direita do pedestal ou do eixo central do manete de potência; e

(2) Suficientemente afastados da alavanca de

<p>position must be by means of a pointer and must provide positive identification and feel (detent, etc.) of the selected position.</p> <p>(ii) The position indicator pointer must be located at the part of the handle that is the maximum dimension of the handle measured from the center of rotation.</p> <p>(2) For electrical or electronic fuel selector:</p> <p>(i) Digital controls or electrical switches must be properly labelled.</p> <p>(ii) Means must be provided to indicate to the flight crew the tank or function selected. Selector switch position is not acceptable as a means of indication. The “off” or “closed” position must be indicated in red.</p> <p>(3) If the fuel valve selector handle or electrical or digital selection is also a fuel shut-off selector, the off position marking must be colored red. If a separate emergency shut-off means is provided, it also must be colored red.</p>	<p>trem de pouso para evitar confusão.</p> <p>(g) A alavanca de trem de pouso deve estar localizada à esquerda do eixo central do manete de potência ou eixo central do pedestal.</p> <p>(h) Cada chave seletora de combustível deve cumprir com a seção 23.995 e estar posicionada e organizada de modo que o piloto possa ver e alcançar sem movimentar qualquer assento ou controle de voo primário quando seu assento está em qualquer posição que possa ser colocado.</p> <p>(1) Para uma seletora de combustível mecânica:</p> <p>(i) A indicação da posição da válvula seletora de combustível deve ser feita por meio de um indicador e deve prover identificação positiva e tátil (batente, etc.) da posição selecionada.</p> <p>(ii) O indicador de posição deve estar localizado na parte do punho com a máxima dimensão medida a partir do centro de rotação do punho.</p> <p>(2) Para uma seletora de combustível elétrica ou eletrônica:</p> <p>(i) Controles digitais ou chaves elétricas devem estar devidamente identificados.</p> <p>(ii) Devem ser providos meios para indicar à tripulação de voo o tanque ou a função selecionada. A posição da chave seletora não é aceitável como um meio de indicação. A posição “desligada” (“off”) ou “fechada” (“closed”) deve estar indicada em vermelho.</p> <p>(3) Se a seletora manual ou elétrica ou digital da válvula de combustível é também uma seletora de corte de combustível, a marca da posição desligada deve estar em vermelho. Se um meio de corte de emergência separado existir, ele também deve estar em vermelho.</p>
--	---

Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13092, Aug. 13, 1969; Amdt. 23-33, 51 FR 26656, July 24, 1986; Amdt. 23-51, 61 FR 5136, Feb. 9, 1996; Amdt.

23-62, 76 FR 75757, Dec. 2, 2011]

§ 23.779 Motion and effect of cockpit controls.

Cockpit controls must be designed so that they operate in accordance with the following movement and actuation:

(a) Aerodynamic controls:

	Motion and effect
(1) Primary controls:	
Aileron	Right (clockwise) for right wing down.
Elevator	Rearward for nose up.
Rudder	Right pedal forward for nose right.
(2) Secondary controls:	
Flaps (or auxiliary lift devices)	Forward or up for flaps up or auxiliary device stowed; rearward or down for flaps down or auxiliary device deployed.
Trim tabs (or equivalent)	Switch motion or mechanical rotation of control to produce similar rotation of the airplane about an axis parallel to the axis control. Axis of roll trim control may be displaced to accommodate comfortable actuation by the pilot. For single-engine airplanes, direction of pilot's hand movement must be in the same sense as airplane response for rudder trim if only a portion of a rotational element is accessible.

(b) Powerplant and auxiliary controls:


	Motion and effect
(1) Powerplant controls:	
Power (thrust) lever	Forward to increase forward thrust and rearward to increase rearward thrust.
Propellers	Forward to increase rpm.
Mixture	Forward or upward for rich.
Fuel	Forward for open.
Carburetor, air heat or alternate air	Forward or upward for cold.
Supercharger	Forward or upward for low blower.
Turbosuper-chargers	Forward, upward, or clockwise to increase pressure.
Rotary controls	Clockwise from off to full on.


(2) Auxiliary controls:	
Fuel tank selector	Right for right tanks, left for left tanks.
Landing gear	Down to extend.
Speed brakes	Aft to extend.

[Amdt. 23–33, 51 FR 26656, July 24, 1986, as amended by Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.781 Cockpit control knob shape.

(a) Flap and landing gear control knobs must conform to the general shapes (but not necessarily the exact sizes or specific proportions) in the following figure:

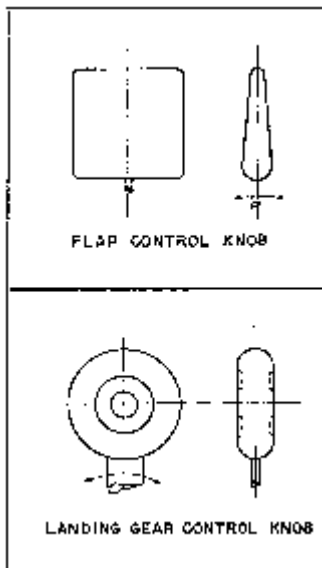

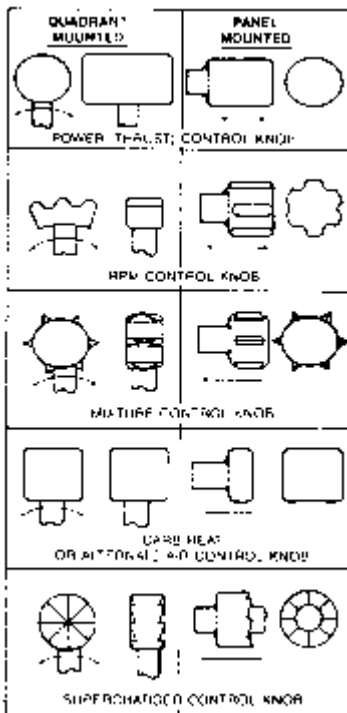

(b) Powerplant control knobs must conform to the general shapes (but not necessarily the exact sizes or specific proportions) in the following figure:

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-33, 51 FR 26657, July 24, 1986]

§ 23.783 Doors.

- (a) Each closed cabin with passenger accommodations must have at least one adequate and easily accessible external door.
- (b) Passenger doors must not be located with respect to any propeller disk or any other potential hazard so as to endanger persons using the door.
- (c) Each external passenger or crew door must comply with the following requirements:
- (1) There must be a means to lock and safeguard the door against inadvertent opening during flight by persons, by cargo, or as a result of mechanical failure.
 - (2) The door must be openable from the inside and the outside when the internal locking mechanism is in the locked position.
 - (3) There must be a means of opening which is simple and obvious and is arranged and marked inside and outside so that the door can be readily located, unlocked, and opened, even in darkness.
 - (4) The door must meet the marking requirements of §23.811 of this part.

(5) The door must be reasonably free from jamming as a result of fuselage deformation in an emergency landing.

(6) Auxiliary locking devices that are actuated externally to the airplane may be used but such devices must be overridden by the normal internal opening means.

(d) In addition, each external passenger or crew door, for a commuter category airplane, must comply with the following requirements:

(1) Each door must be openable from both the inside and outside, even though persons may be crowded against the door on the inside of the airplane.

(2) If inward opening doors are used, there must be a means to prevent occupants from crowding against the door to the extent that would interfere with opening the door.

(3) Auxiliary locking devices may be used.

(e) Each external door on a commuter category airplane, each external door forward of any engine or propeller on a normal, utility, or acrobatic category airplane, and each door of the pressure vessel on a pressurized airplane must comply with the following requirements:

(1) There must be a means to lock and safeguard each external door, including cargo and service type doors, against inadvertent opening in flight, by persons, by cargo, or as a result of mechanical failure or failure of a single structural element, either during or after closure.

(2) There must be a provision for direct visual inspection of the locking mechanism to determine if the external door, for which the initial opening movement is not inward, is fully closed and locked. The provisions must be discernible, under operating lighting conditions, by a crewmember using a flashlight or an equivalent lighting source.

(3) There must be a visual warning means to signal a flight crewmember if the external door is not fully closed and locked. The means must be designed so that any failure, or combination of failures, that would result in an erroneous closed and locked indication is improbable for doors for which the initial opening movement is not inward.

(f) In addition, for commuter category airplanes, the following requirements apply:

(1) Each passenger entry door must qualify as a floor level emergency exit. This exit must have a rectangular opening of not less than 24 inches wide by 48 inches high, with corner radii not greater than one-third the width of the exit.

(2) If an integral stair is installed at a passenger entry door, the stair must be designed so that, when subjected to the inertia loads resulting from the ultimate static load factors in §23.561(b)(2) and following the collapse of one or more legs of the landing gear, it will not reduce the effectiveness of emergency egress through the passenger entry door.

(g) If lavatory doors are installed, they must be designed to preclude an occupant from becoming trapped inside the lavatory. If a locking mechanism is installed, it must be capable of being unlocked from outside of the lavatory.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–36, 53 FR 30813, Aug. 15, 1988; Amdt. 23–46, 59 FR 25772, May 17, 1994; Amdt. 23–49, 61 FR 5166, Feb. 9, 1996]

<p>23.785 Seats, berths, litters, safety belts, and shoulder harnesses.</p> <p>There must be a seat or berth for each occupant that meets the following:</p> <p>(a) Each seat/restraint system and the supporting structure must be designed to support occupants weighing at least 215 pounds (98 kg) when subjected to the maximum load factors corresponding to the specified flight and ground load conditions, as defined in the approved operating envelope of the airplane. In addition, these loads must be multiplied by a factor of 1.33 in determining the strength of all fittings and the attachment of:</p> <p>(1) Each seat to the structure; and</p> <p>(2) Each safety belt and shoulder harness to the seat or structure.</p> <p>(b) Each forward-facing or aft-facing seat/restraint system in normal, utility, or acrobatic category airplanes must consist of a seat, a safety belt, and a shoulder harness, with a metal-to-metal latching device, that are designed to provide the occupant protection provisions required in section 23.562. Other seat orientations must provide the same level of occupant protection as a forward-facing or aft-facing seat with a safety belt and a shoulder harness, and must provide the protection provisions of section 23.562.</p> <p>(c) For commuter category airplanes, each seat and the supporting structure must be designed for occupants weighing at least 170 pounds (77 kg) when subjected to the inertia loads resulting from the ultimate static load factors prescribed in paragraph 23.561(b)(2) of this RBAC. Each occupant must be protected from</p>	<p>23.785 Assentos, leitos, macas, cintos de segurança, e cintos de ombro.</p> <p>Deve haver um assento ou leito para cada ocupante que satisfaça o seguinte:</p> <p>(a) Cada assento/sistema de retenção e a estrutura de apoio devem ser projetados para suportar ocupantes pesando pelo menos 215 libras (98 kg) quando submetidos aos fatores de carga máximos correspondentes às condições específicas de carga no solo e voo, conforme definido no envelope operacional aprovado do avião. Em adição, essas cargas devem ser multiplicadas por um fator de 1,33 na determinação da resistência de todos as montagens e fixações de:</p> <p>(1) Cada assento à estrutura; e</p> <p>(2) Cada cinto de segurança e cinto de ombro ao assento ou à estrutura.</p> <p>(b) Cada assento/sistema de retenção orientado para frente ou para trás em aviões de categoria normal, utilidade, ou acrobática deve compor-se de um assento, um cinto de segurança, e um cinto de ombro, com um dispositivo de trancamento metal-a-metal, que são projetados para fornecer as provisões de proteção de ocupante requeridas no 23.562. Outras orientações de assento devem fornecer o mesmo nível de proteção de ocupante que um assento orientado para frente ou para trás com um cinto de segurança e um cinto de ombro, e devem fornecer as provisões de proteção do 23.562.</p> <p>(c) Para aviões de categoria transporte regional, cada assento e a estrutura de apoio devem ser projetados para ocupantes pesando pelo menos 170 libras (77 kg) quando submetido às cargas de inércia resultantes dos fatores de carga</p>
---	---

serious head injury when subjected to the inertia loads resulting from these load factors by a safety belt and shoulder harness, with a metal-to-metal latching device, for the front seats and a safety belt, or a safety belt and shoulder harness, with a metal-to-metal latching device, for each seat other than the front seats. Commuter category jet airplanes, must also comply with the requirements of section 23.562.

(d) Each restraint system must have a single-point release for occupant evacuation.

(e) The restraint system for each crewmember must allow the crewmember, when seated with the safety belt and shoulder harness fastened, to perform all functions necessary for flight operations.

(f) Each pilot seat must be designed for the reactions resulting from the application of pilot forces to the primary flight controls as prescribed in section 23.395 of this RBAC.

(g) There must be a means to secure each safety belt and shoulder harness, when not in use, to prevent interference with the operation of the airplane and with rapid occupant egress in an emergency.

(h) Unless otherwise placarded, each seat in a utility or acrobatic category airplane must be designed to accommodate an occupant wearing a parachute.

(i) The cabin area surrounding each seat, including the structure, interior walls, instrument panel, control wheel, pedals, and seats within striking distance of the occupant's head or torso (with the restraint system fastened) must be free of potentially injurious objects, sharp edges, protuberances, and hard surfaces. If energy absorbing designs or devices are used to meet this requirement, they must protect the occupant from serious injury when the occupant is subjected to the inertia loads resulting from the ultimate static load factors prescribed in paragraph 23.561(b)(2) of

estáticos finais prescritos em 23.561(b)(2) deste RBAC. Cada ocupante deve ser protegido de lesões graves na cabeça quando submetido às cargas de inércia resultantes desses fatores de carga, por meio de um cinto de segurança e cinto de ombro, com um dispositivo de trancamento metal-a-metal para os assentos dianteiros e um cinto de segurança, ou um cinto de segurança e cinto de ombro, com um dispositivo de trancamento metal-a-metal, para os demais assentos. Aviões a jato da categoria transporte regional também devem cumprir com os requisitos da seção 23.562.

(d) Cada sistema de retenção deve ter um ponto único de liberação para a evacuação do ocupante.

(e) O sistema de retenção para cada tripulante deve permitir ao tripulante, enquanto sentado com o cinto de segurança e cinto de ombro afivelados, executar todas as funções necessárias para as operações de voo.

(f) Cada assento de piloto deve ser projetado para as reações resultantes da aplicação de forças do piloto aos controles de voo primários como prescrito no 23.395 deste RBAC.

(g) Deve haver um meio de reter cada cinto de segurança e cinto de ombro, quando não em uso, para evitar a interferência com a operação do avião e com o rápido egresso do ocupante em uma emergência.

(h) Salvo sinalizado de outra forma, cada assento em um avião categoria utilidade ou acrobática deve ser projetado para acomodar um ocupante usando um pára-quadras.

(i) A área da cabine em torno de cada assento, incluindo a estrutura, paredes internas, painel de instrumentos, manche, pedais, e os assentos dentro da trajetória de impacto da cabeça ou do tronco do ocupante (com o sistema de retenção afivelado) deve ser livre de objetos potencialmente prejudiciais, arestas cortantes, protuberâncias e superfícies duras. Se forem usados projetos ou dispositivos de absorção de

this RBAC, or they must comply with the occupant protection provisions of section 23.562 of this RBAC, as required in paragraphs (b) and (c) of this section.

(j) Each seat track must be fitted with stops to prevent the seat from sliding off the track.

(k) Each seat/restraint system may use design features, such as crushing or separation of certain components, to reduce occupant loads when showing compliance with the requirements of section 23.562 of this RBAC; otherwise, the system must remain intact.

(l) For the purposes of this section, a front seat is a seat located at a flight crewmember station or any seat located alongside such a seat.

(m) Each berth, or provisions for a litter, installed parallel to the longitudinal axis of the airplane, must be designed so that the forward part has a padded end-board, canvas diaphragm, or equivalent means that can withstand the load reactions from a 215-pound (98 kg) occupant when subjected to the inertia loads resulting from the ultimate static load factors of paragraph 23.561(b)(2) of this RBAC. In addition:

(1) Each berth or litter must have an occupant restraint system and may not have corners or other parts likely to cause serious injury to a person occupying it during emergency landing conditions; and

(2) Occupant restraint system attachments for the berth or litter must withstand the inertia loads resulting from the ultimate static load factors of paragraph 23.561(b)(2) of this RBAC.

(n) Proof of compliance with the static strength requirements of this section for seats and berths approved as part of the type design and for seat and berth installations may be shown by:

(1) Structural analysis, if the structure conforms to conventional airplane types for

energia para atender a essa exigência, eles devem proteger os ocupantes de lesões graves quando o ocupante é submetido às cargas de inércia resultantes dos fatores de carga estáticos finais prescrito no 23.561 (b) (2) deste RBAC, ou eles devem cumprir com as provisões de proteção de ocupante do 23.562 deste RBAC, conforme requerido nos parágrafos (b) e (c) desta seção.

(j) Cada trilho de assento deve estar equipado com batentes para impedir que o assento deslize para fora do trilho.

(k) Cada assento/sistema de retenção pode usar recursos de projeto, tais como o esmagamento ou a separação de determinados componentes, para reduzir as cargas no ocupante quando na demonstração de cumprimento com os requisitos do 23.562 deste RBAC; caso contrário, o sistema deve permanecer intacto.

(l) Para os objetivos desta seção, um assento dianteiro é um assento localizado em um posto de um tripulante de voo ou qualquer assento localizado ao lado de tal assento.

(m) Cada leito, ou provisões para uma maca, instalados paralelamente ao eixo longitudinal do avião, devem ser projetados de modo que a parte da frente tenha um anteparo acolchoado, diafragma de lona, ou outro meio equivalente que possa suportar as reações de carga de um ocupante de 215 libras (98 kg), quando submetido às cargas de inércia resultante dos fatores de carga estática finais do 23.561 (b)(2) deste RBAC. Em adição:

(1) Cada leito ou maca deve ter um sistema de retenção de ocupante e não pode ter cantos ou outras partes que possam causar lesões graves à pessoa que o ocupa, durante as condições de pouso de emergência; e

(2) As fixações do sistema de retenção do ocupante para o leito ou maca devem suportar as cargas de inércia resultantes dos fatores de carga estática final do 23.561 (b)(2) deste

<p>which existing methods of analysis are known to be reliable;</p> <p>(2) A combination of structural analysis and static load tests to limit load; or</p> <p>(3) Static load tests to ultimate loads.</p>	<p>RBAC.</p> <p>(n) O cumprimento com os requisitos de resistência estática desta seção para assentos e leitos aprovados como parte do projeto de tipo e para a instalação dos assentos e leitos pode ser demonstrado por;</p> <p>(1) Análise estrutural, se a estrutura está em conformidade com os tipos convencionais de avião para os quais os métodos existentes de análise são reconhecidamente confiáveis;</p> <p>(2) Uma combinação de análise estrutural e ensaios de carga estática até a carga limite, ou</p> <p>(3) Ensaio de carga estática até a carga final.</p>
---	---

[Amdt. 23–36, 53 FR 30813, Aug. 15, 1988; Amdt. 23–36, 54 FR 50737, Dec. 11, 1989; Amdt. 23–49, 61 FR 5167, Feb. 9, 1996]

§ 23.787 **Baggage and cargo compartments.**

(a) Each baggage and cargo compartment must:

(1) Be designed for its placarded maximum weight of contents and for the critical load distributions at the appropriate maximum load factors corresponding to the flight and ground load conditions of this part.

(2) Have means to prevent the contents of any compartment from becoming a hazard by shifting, and to protect any controls, wiring, lines, equipment or accessories whose damage or failure would affect safe operations.

(3) Have a means to protect occupants from injury by the contents of any compartment, located aft of the occupants and separated by structure, when the ultimate forward inertial load factor is 9g and assuming the maximum allowed baggage or cargo weight for the compartment.

(b) Designs that provide for baggage or cargo to be carried in the same compartment as passengers must have a means to protect the occupants from injury when the baggage or cargo is subjected to the inertial loads resulting from the ultimate static load factors of §23.561(b)(3), assuming the maximum allowed baggage or cargo weight for the compartment.

(c) For airplanes that are used only for the carriage of cargo, the flightcrew emergency exits must meet the requirements of §23.807 under any cargo loading conditions.

[Doc. No. 27806, 61 FR 5167, Feb. 9, 1996]

§ 23.791 **Passenger information signs.**

For those airplanes in which the flightcrew members cannot observe the other occupants' seats or where the flightcrew members' compartment is separated from the passenger compartment, there must be at least one illuminated sign (using either letters or symbols) notifying all passengers when seat belts should be fastened. Signs that notify when seat belts should be fastened must:

- (a) When illuminated, be legible to each person seated in the passenger compartment under all probable lighting conditions; and
- (b) Be installed so that a flightcrew member can, when seated at the flightcrew member's station, turn the illumination on and off.

[Doc. No. 27806, 61 FR 5167, Feb. 9, 1996]

§ 23.803 Emergency evacuation.

(a) For commuter category airplanes, an evacuation demonstration must be conducted utilizing the maximum number of occupants for which certification is desired. The demonstration must be conducted under simulated night conditions using only the emergency exits on the most critical side of the airplane. The participants must be representative of average airline passengers with no prior practice or rehearsal for the demonstration. Evacuation must be completed within 90 seconds.

(b) In addition, when certification to the emergency exit provisions of §23.807(d)(4) is requested, only the emergency lighting system required by §23.812 may be used to provide cabin interior illumination during the evacuation demonstration required in paragraph (a) of this section.

[Amdt. 23–34, 52 FR 1831, Jan. 15, 1987, as amended by Amdt. 23–46, 59 FR 25773, May 17, 1994]

§ 23.805 Flightcrew emergency exits.

For airplanes where the proximity of the passenger emergency exits to the flightcrew area does not offer a convenient and readily accessible means of evacuation for the flightcrew, the following apply:

- (a) There must be either one emergency exit on each side of the airplane, or a top hatch emergency exit, in the flightcrew area;
- (b) Each emergency exit must be located to allow rapid evacuation of the crew and have a size and shape of at least a 19- by 20-inch unobstructed rectangular opening; and
- (c) For each emergency exit that is not less than six feet from the ground, an assisting means must be provided. The assisting means may be a rope or any other means demonstrated to be suitable for the purpose. If the assisting means is a rope, or an approved device equivalent to a rope, it must be—

(1) Attached to the fuselage structure at or above the top of the emergency exit opening or, for a device at a pilot's emergency exit window, at another approved location if the stowed device, or its attachment, would reduce the pilot's view; and

(2) Able (with its attachment) to withstand a 400-pound static load.

[Doc. No. 26324, 59 FR 25773, May 17, 1994]

<p>23.807 Emergency exits.</p> <p>(a) Number and location. Emergency exits must be located to allow escape without crowding in any probable crash attitude. The airplane must have at least the following emergency exits:</p> <p>(1) For all airplanes with a seating capacity of two or more, excluding airplanes with canopies, at least one emergency exit on the opposite side of the cabin from the main door specified in section 23.783 of this RBAC.</p> <p>(2) [Reserved]</p> <p>(3) If the pilot compartment is separated from the cabin by a door that is likely to block the pilot's escape in a minor crash, there must be an exit in the pilot's compartment. The number of exits required by paragraph (a)(1) of this section must then be separately determined for the passenger compartment, using the seating capacity of that compartment.</p> <p>(4) Emergency exits must not be located with respect to any propeller disk or any other potential hazard so as to endanger persons using that exit.</p> <p>(b) Type and operation. Emergency exits must be movable windows, panels, canopies, or external doors, openable from both inside and outside the airplane, that provide a clear and unobstructed opening large enough to admit a 19-by-26-inch (480-by-660-milimeters) ellipse. Auxiliary locking devices used to secure the airplane must be designed to be overridden by the normal internal opening means. The inside handles of emergency exits that open outward must be adequately protected against inadvertent operation. In addition, each emergency exit must:</p> <p>(1) Be readily accessible, requiring no</p>	<p>23.807 Saídas de emergência.</p> <p>(a) Número e localização. As saídas de emergência devem estar localizadas de modo a permitir o egresso sem aglomeração em qualquer atitude de acidente provável. O avião deve ter pelo menos as seguintes saídas de emergência:</p> <p>(1) Para todos os aviões com capacidade de dois ou mais assentos, excluindo os aviões com canopis, pelo menos uma saída de emergência no lado oposto da porta principal da cabine especificada no 23.783 deste RBAC.</p> <p>(2) [Reservado]</p> <p>(3) Se o compartimento do piloto é separado da cabine por uma porta que possa obstruir o egresso do piloto em um acidente menor, deve haver uma saída no compartimento do piloto. O número de saídas exigido pelo parágrafo (a) (1) desta seção deve ser determinado separadamente para o compartimento de passageiros, utilizando a capacidade de assento do compartimento.</p> <p>(4) As saídas de emergência não podem estar posicionadas em relação a qualquer disco de hélice ou qualquer outro perigo em potencial, de modo a pôr em perigo as pessoas que utilizam essa saída.</p> <p>(b) Tipo e operação. As saídas de emergência devem ser janelas móveis, painéis, canopis, ou portas externas, que podem ser abertas tanto pelo lado de dentro quanto pelo lado de fora do avião, que fornecem uma abertura livre e desobstruída, grande o suficiente para admitir uma elipse de 19 por 26 polegadas (480 por 660 mm). Dispositivos de travamento auxiliares utilizados para proteger o avião devem ser projetados para serem sobrepujados pelo meio normal de abertura interna. As maçanetas internas das saídas de emergência</p>
---	--

<p>exceptional agility to be used in emergencies;</p> <p>(2) Have a method of opening that is simple and obvious;</p> <p>(3) Be arranged and marked for easy location and operation, even in darkness;</p> <p>(4) Have reasonable provisions against jamming by fuselage deformation; and</p> <p>(5) In the case of acrobatic category airplanes, allow each occupant to abandon the airplane at any speed between V_{S0} and V_D; and</p> <p>(6) In the case of utility category airplanes certificated for spinning, allow each occupant to abandon the airplane at the highest speed likely to be achieved in the maneuver for which the airplane is certificated.</p> <p>(c) Tests. The proper functioning of each emergency exit must be shown by tests.</p> <p>(d) Doors and exits. In addition, for commuter category airplanes, the following requirements apply:</p> <p>(1) In addition to the passenger entry door:</p> <p>(i) For an airplane with a total passenger seating capacity of 15 or fewer, an emergency exit, as defined in paragraph (b) of this section, is required on each side of the cabin; and</p> <p>(ii) For an airplane with a total passenger seating capacity of 16 through 19, three emergency exits, as defined in paragraph (b) of this section, are required with one on the same side as the passenger entry door and two on the side opposite the door.</p> <p>(2) A means must be provided to lock each emergency exit and to safeguard against its opening in flight, either inadvertently by persons or as a result of mechanical failure. In addition, a means for direct visual inspection of the locking mechanism must be provided to determine that each emergency exit for which</p>	<p>que se abrem para fora devem ser adequadamente protegidas contra operação inadvertida. Em adição, cada saída de emergência deve:</p> <p>(1) Ser de fácil acesso, não requerendo agilidade excepcional para ser usada em emergência;</p> <p>(2) Ter um método de abertura que seja simples e óbvio;</p> <p>(3) Ser disposta e marcada para fácil localização e operação, mesmo na escuridão;</p> <p>(4) Ter provisão razoável contra emperramento causado pela deformação da fuselagem; e</p> <p>(5) No caso de aviões de categoria acrobática, permitir que cada ocupante abandone o avião, em qualquer velocidade entre V_{S0} e V_D; e</p> <p>(6) No caso de aviões de categoria utilidade certificados para spinning, permitir que cada um dos ocupantes abandone o avião na velocidade mais alta possível de ser atingida na manobra para a qual o avião é certificado.</p> <p>(c) Ensaios. O funcionamento apropriado de cada saída de emergência deve ser demonstrado por ensaio.</p> <p>(d) Portas e saídas. Em adição, para aviões categoria transporte regional, os seguintes requisitos são aplicáveis:</p> <p>(1) Além da porta de entrada de passageiros:</p> <p>(i) Para um avião com uma capacidade total de 15 ou menos assentos de passageiros, uma saída de emergência, conforme definido no parágrafo (b) desta seção, é requerida em cada lado da cabine, e</p> <p>(ii) Para um avião com uma capacidade total de 16 a 19 assentos de passageiros, três saídas de emergência, conforme definido no parágrafo (b) desta seção, são requeridas, sendo uma do mesmo lado que a porta de entrada de</p>
---	---

the initial opening movement is outward is fully locked.

(3) Each required emergency exit, except floor level exits, must be located over the wing or, if not less than six feet (1,83 m) from the ground, must be provided with an acceptable means to assist the occupants to descend to the ground. Emergency exits must be distributed as uniformly as practical, taking into account passenger seating configuration.

(4) Unless the applicant has complied with paragraph (d)(1) of this section, there must be an emergency exit on the side of the cabin opposite the passenger entry door, provided that:

(i) For an airplane having a passenger seating configuration of nine or fewer, the emergency exit has a rectangular opening measuring not less than 19 inches by 26 inches (480 mm by 660 mm) high with corner radii not greater than one-third the width of the exit, located over the wing, with a step up inside the airplane of not more than 29 inches (740 mm) and a step down outside the airplane of not more than 36 inches (910 mm);

(ii) For an airplane having a passenger seating configuration of 10 to 19 passengers, the emergency exit has a rectangular opening measuring not less than 20 inches (510 mm) wide by 36 inches (910 mm) high, with corner radii not greater than one-third the width of the exit, and with a step up inside the airplane of not more than 20 inches (510 mm). If the exit is located over the wing, the step down outside the airplane may not exceed 27 inches (690 mm); and

(iii) The airplane complies with the additional requirements of paragraphs 23.561(b)(2)(iv), 23.803(b), 23.811(c), 23.812, 23.813(b), and 23.815.

(e) For multiengine airplanes, ditching emergency exits must be provided in accordance with the following requirements,

passageiros e duas do lado aperto à porta.

(2) Um meio deve ser fornecido para travar todas as saídas de emergência e proteger contra a sua abertura em voo, tanto inadvertidamente por pessoas quanto como resultado de falha mecânica. Além disso, um meio de inspeção visual direto do mecanismo de travamento deve ser fornecido para determinar que cada saída de emergência, na qual o movimento de abertura inicial é para fora, esteja totalmente travada.

(3) Cada saída de emergência requerida, exceto saídas no nível do piso, deve estar localizada sobre a asa ou, se não estiver a menos que seis pés (1,83 m) do chão, deve estar equipada com um meio aceitável para auxiliar os ocupantes a descer ao chão. As saídas de emergência devem ser distribuídas tão uniformemente quanto praticável, levando-se em conta a configuração de assentos de passageiros.

(4) A menos que o requerente tenha cumprido com o parágrafo (d)(1) desta seção, deve haver uma saída de emergência no lado da cabine, oposta à porta de entrada de passageiros, desde que:

(i) Para um avião com uma configuração de nove ou menos assentos de passageiros, a saída de emergência tenha uma abertura retangular medindo pelo menos 19 polegadas por 26 polegadas (480 por 660 mm) de altura, com raios de canto não superior a um terço da largura da saída, localizada sobre a asa, com um degrau de subida no interior do avião, não superior a 29 polegadas (740 mm) e um degrau de descida para fora do avião, não superior a 36 polegadas (910 mm);

(ii) Para um avião com uma configuração de 10 a 19 assentos de passageiros, a saída de emergência tenha uma abertura retangular medindo pelo menos 20 polegadas (510 mm) de largura por 36 polegadas (910 mm) de altura, com raios de canto não superior a um terço da largura da saída, e com um degrau de subida no interior do avião não superior a 20 polegadas (510 mm). Se a saída está localizada

<p>unless the emergency exits required by paragraph (a) or (d) of this section already comply with them:</p> <p>(1) One exit above the waterline on each side of the airplane having the dimensions specified in paragraph (b) or (d) of this section, as applicable; and</p> <p>(2) If side exits cannot be above the waterline, there must be a readily accessible overhead hatch emergency exit that has a rectangular opening measuring not less than 20 inches (510 mm) wide by 36 inches (910 mm) long, with corner radii not greater than one-third the width of the exit.</p> <p>(3) In lieu of paragraph (e)(2) of this section, if any side exit(s) cannot be above the waterline, a device may be placed at each of such exit(s) prior to ditching. This device must slow the inflow of water when such exit(s) is opened with the airplane ditched. For commuter category airplanes, the clear opening of such exit(s) must meet the requirements defined in paragraph (d) of this section.</p>	<p>sobre a asa, o degrau de descida do lado de fora do avião não pode exceder 27 polegadas (690 mm); e</p> <p>(iii) O avião cumpra com os requisitos adicionais dos parágrafos 23.561(b)(2)(iv), 23.803(b), 23.811(c), 23.812, 23.813(b) e 23.815.</p> <p>(e) Para aviões multimotores, saídas de emergência para pouso na água devem ser fornecidas em conformidade com os seguintes requisitos, a menos que as saídas de emergência requeridas pelo parágrafo (a) ou (d) desta seção já cumpra com eles:</p> <p>(1) Uma saída acima da linha d'água de cada lado do avião com as dimensões especificadas no parágrafo (b) ou (d) desta seção, conforme aplicável; e</p> <p>(2) Se as saídas laterais não podem estar acima da linha d'água, deve haver uma saída de emergência do tipo escotilha de teto facilmente acessível que tenha uma abertura retangular medindo pelo menos 20 polegadas (510 mm) de largura por 36 polegadas (910 mm) de comprimento, com raios de canto não superior a um terço da largura da saída.</p> <p>(3) Ao invés do parágrafo (e)(2) desta seção, se qualquer saída de emergência não puder ficar acima da linha d'água, um dispositivo pode ser colocado em cada saída antes da amerissagem. Esse dispositivo deve diminuir o fluxo de água quando tais portas forem abertas após a amerissagem. Para aviões da categoria transporte regional a abertura desobstruída de tal(is) saída(s) deve cumprir os requisitos definidos no parágrafo (d) desta seção.</p>
---	--

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13092, Aug. 13, 1969; Amdt. 23-10, 36 FR 2864, Feb. 11, 1971; Amdt. 23-34, 52 FR 1831, Jan. 15, 1987; Amdt. 23-36, 53 FR 30814, Aug. 15, 1988; 53 FR 34194, Sept. 2, 1988; Amdt. 23-46, 59 FR 25773, May 17, 1994; Amdt. 23-49, 61 FR 5167, Feb. 9, 1996; Amdt. 23-62, 76 FR 75757, Dec. 2, 2011]

§ 23.811 Emergency exit marking.

(a) Each emergency exit and external door in the passenger compartment must be externally marked

and readily identifiable from outside the airplane by—

- (1) A conspicuous visual identification scheme; and
 - (2) A permanent decal or placard on or adjacent to the emergency exit which shows the means of opening the emergency exit, including any special instructions, if applicable.
- (b) In addition, for commuter category airplanes, these exits and doors must be internally marked with the word “exit” by a sign which has white letters 1 inch high on a red background 2 inches high, be self-illuminated or independently, internally electrically illuminated, and have a minimum brightness of at least 160 microlamberts. The color may be reversed if the passenger compartment illumination is essentially the same.
- (c) In addition, when certification to the emergency exit provisions of §23.807(d)(4) is requested, the following apply:
- (1) Each emergency exit, its means of access, and its means of opening, must be conspicuously marked;
 - (2) The identity and location of each emergency exit must be recognizable from a distance equal to the width of the cabin;
 - (3) Means must be provided to assist occupants in locating the emergency exits in conditions of dense smoke;
 - (4) The location of the operating handle and instructions for opening each emergency exit from inside the airplane must be shown by marking that is readable from a distance of 30 inches;
 - (5) Each passenger entry door operating handle must—
 - (i) Be self-illuminated with an initial brightness of at least 160 microlamberts; or
 - (ii) Be conspicuously located and well illuminated by the emergency lighting even in conditions of occupant crowding at the door;
 - (6) Each passenger entry door with a locking mechanism that is released by rotary motion of the handle must be marked—
 - (i) With a red arrow, with a shaft of at least three-fourths of an inch wide and a head twice the width of the shaft, extending along at least 70 degrees of arc at a radius approximately equal to three-fourths of the handle length;
 - (ii) So that the center line of the exit handle is within \pm one inch of the projected point of the arrow when the handle has reached full travel and has released the locking mechanism;
 - (iii) With the word “open” in red letters, one inch high, placed horizontally near the head of the arrow; and
 - (7) In addition to the requirements of paragraph (a) of this section, the external marking of each

emergency exit must—

(i) Include a 2-inch colorband outlining the exit; and

(ii) Have a color contrast that is readily distinguishable from the surrounding fuselage surface. The contrast must be such that if the reflectance of the darker color is 15 percent or less, the reflectance of the lighter color must be at least 45 percent. “Reflectance” is the ratio of the luminous flux reflected by a body to the luminous flux it receives. When the reflectance of the darker color is greater than 15 percent, at least a 30 percent difference between its reflectance and the reflectance of the lighter color must be provided.

[Amdt. 23–36, 53 FR 30814, Aug. 15, 1988; 53 FR 34194, Sept. 2, 1988, as amended by Amdt. 23–46, 59 FR 25773, May 17, 1994]

§ 23.812 Emergency lighting.

When certification to the emergency exit provisions of §23.807(d)(4) is requested, the following apply:

(a) An emergency lighting system, independent of the main cabin lighting system, must be installed. However, the source of general cabin illumination may be common to both the emergency and main lighting systems if the power supply to the emergency lighting system is independent of the power supply to the main lighting system.

(b) There must be a crew warning light that illuminates in the cockpit when power is on in the airplane and the emergency lighting control device is not armed.

(c) The emergency lights must be operable manually from the flightcrew station and be provided with automatic activation. The cockpit control device must have “on,” “off,” and “armed” positions so that, when armed in the cockpit, the lights will operate by automatic activation.

(d) There must be a means to safeguard against inadvertent operation of the cockpit control device from the “armed” or “on” positions.

(e) The cockpit control device must have provisions to allow the emergency lighting system to be armed or activated at any time that it may be needed.

(f) When armed, the emergency lighting system must activate and remain lighted when—

(1) The normal electrical power of the airplane is lost; or

(2) The airplane is subjected to an impact that results in a deceleration in excess of 2g and a velocity change in excess of 3.5 feet-per-second, acting along the longitudinal axis of the airplane; or

(3) Any other emergency condition exists where automatic activation of the emergency lighting is necessary to aid with occupant evacuation.

(g) The emergency lighting system must be capable of being turned off and reset by the flightcrew after automatic activation.

(h) The emergency lighting system must provide internal lighting, including—

(1) Illuminated emergency exit marking and locating signs, including those required in §23.811(b);

(2) Sources of general illumination in the cabin that provide an average illumination of not less than 0.05 foot-candle and an illumination at any point of not less than 0.01 foot-candle when measured along the center line of the main passenger aisle(s) and at the seat armrest height; and

(3) Floor proximity emergency escape path marking that provides emergency evacuation guidance for the airplane occupants when all sources of illumination more than 4 feet above the cabin aisle floor are totally obscured.

(i) The energy supply to each emergency lighting unit must provide the required level of illumination for at least 10 minutes at the critical ambient conditions after activation of the emergency lighting system.

(j) If rechargeable batteries are used as the energy supply for the emergency lighting system, they may be recharged from the main electrical power system of the airplane provided the charging circuit is designed to preclude inadvertent battery discharge into the charging circuit faults. If the emergency lighting system does not include a charging circuit, battery condition monitors are required.

(k) Components of the emergency lighting system, including batteries, wiring, relays, lamps, and switches, must be capable of normal operation after being subjected to the inertia forces resulting from the ultimate load factors prescribed in §23.561(b)(2).

(l) The emergency lighting system must be designed so that after any single transverse vertical separation of the fuselage during a crash landing:

(1) At least 75 percent of all electrically illuminated emergency lights required by this section remain operative; and

(2) Each electrically illuminated exit sign required by §23.811 (b) and (c) remains operative, except those that are directly damaged by the fuselage separation.

[Doc. No. 26324, 59 FR 25774, May 17, 1994]

§ 23.813 Emergency exit access.

(a) For commuter category airplanes, access to window-type emergency exits may not be obstructed by seats or seat backs.

(b) In addition, when certification to the emergency exit provisions of §23.807(d)(4) is requested, the following emergency exit access must be provided:

(1) The passageway leading from the aisle to the passenger entry door must be unobstructed and at least 20 inches wide.

(2) There must be enough space next to the passenger entry door to allow assistance in evacuation

of passengers without reducing the unobstructed width of the passageway below 20 inches.

(3) If it is necessary to pass through a passageway between passenger compartments to reach a required emergency exit from any seat in the passenger cabin, the passageway must be unobstructed; however, curtains may be used if they allow free entry through the passageway.

(4) No door may be installed in any partition between passenger compartments unless that door has a means to latch it in the open position. The latching means must be able to withstand the loads imposed upon it by the door when the door is subjected to the inertia loads resulting from the ultimate static load factors prescribed in §23.561(b)(2).

(5) If it is necessary to pass through a doorway separating the passenger cabin from other areas to reach a required emergency exit from any passenger seat, the door must have a means to latch it in the open position. The latching means must be able to withstand the loads imposed upon it by the door when the door is subjected to the inertia loads resulting from the ultimate static load factors prescribed in §23.561(b)(2).

[Amdt. 23–36, 53 FR 30815, Aug. 15, 1988, as amended by Amdt. 23–46, 59 FR 25774, May 17, 1994]

§ 23.815 Width of aisle.

(a) Except as provided in paragraph (b) of this section, for commuter category airplanes, the width of the main passenger aisle at any point between seats must equal or exceed the values in the following table:

Number of passenger seats	Minimum main passenger aisle width	
	Less than 25 inches from floor	25 inches and more from floor
10 through 19	9 inches	15 inches.

(b) When certification to the emergency exist provisions of §23.807(d)(4) is requested, the main passenger aisle width at any point between the seats must equal or exceed the following values:

Number of passenger seats	Minimum main passenger aisle width (inches)	
	Less than 25 inches from floor	25 inches and more from floor
10 or fewer	¹ 12	15
11 through 19	12	20

¹A narrower width not less than 9 inches may be approved when substantiated by tests found necessary by the Administrator.

[Amdt. 23–34, 52 FR 1831, Jan. 15, 1987, as amended by Amdt. 23–46, 59 FR 25774, May 17, 1994]

23.831 Ventilation.	23.831 Ventilação.
----------------------------	---------------------------

(a) Each passenger and crew compartment must be suitably ventilated. Carbon monoxide concentration may not exceed one part in 20.000 parts of air (50 ppm).

(b) For pressurized airplanes, the ventilating air in the flightcrew and passenger compartments must be free of harmful or hazardous concentrations of gases and vapors in normal operations and in the event of reasonably probable failures or malfunctioning of the ventilating, heating, pressurization, or other systems and equipment. If accumulation of hazardous quantities of smoke in the cockpit area is reasonably probable, smoke evacuation must be readily accomplished starting with full pressurization and without depressurizing beyond safe limits.

(c) For jet pressurized airplanes that operate at altitudes above 41.000 feet (12.497 meters), under normal operating conditions and in the event of any probable failure conditions of any system which would adversely affect the ventilating air, the ventilation system must provide reasonable passenger comfort. The ventilation system must also provide a sufficient amount of uncontaminated air to enable the flight crew members to perform their duties without undue discomfort or fatigue. For normal operating conditions, the ventilation system must be designed to provide each occupant with at least 0,55 pounds (0,25 kg) of fresh air per minute. In the event of the loss of one source of fresh air, the supply of fresh airflow may not be less than 0,4 pounds (0,18 kg) per minute for any period exceeding five minutes.

(d) For jet pressurized airplanes that operate at altitudes above 41.000 feet (12.497 meters), other probable and improbable Environmental Control System failure conditions that adversely affect the passenger and flight crew compartment environmental conditions may not affect flight crew performance so as to result in a hazardous condition, and no occupant shall sustain permanent physiological harm. The cabin cooling system must be

(a) Cada compartimento de passageiros e tripulação deve ser adequadamente ventilado. A concentração de monóxido de carbono não pode exceder uma parte em 20.000 partes de ar (50 ppm).


(b) Para aviões pressurizados, o ar de ventilação nos compartimentos da tripulação de voo e de passageiros deve estar livre de concentrações nocivas ou perigosas de gases e vapores em operações normais e no caso de falhas razoavelmente prováveis ou mau funcionamento da ventilação, aquecimento, pressurização, ou outros sistemas e equipamentos. Se o acúmulo de quantidades perigosas de fumaça na área do cockpit for razoavelmente provável, a evacuação de fumaça deve ser prontamente realizada começando com a pressurização plena e sem depressurizar além dos limites seguros.

(c) Para aviões a jato pressurizados que operam em altitudes acima de 41.000 pés (12.497 metros), sob condições normais de operação, e no evento de quaisquer condições de falha prováveis de qualquer sistema que afetariam adversamente o ar de ventilação, o sistema de ventilação deve prover razoável conforto aos passageiros. O sistema de ventilação também deve prover uma quantidade suficiente de ar não-contaminado que permita à tripulação seus deveres sem desconforto ou fadiga excessivos. Para condições normais de operação, o sistema de ventilação deve ser projetado para prover cada ocupante com pelo menos 0,55 libras (0,25 kg) de ar fresco por minuto. No evento de perda de uma fonte de ar fresco, o suprimento de ar fresco não pode ser inferior a 0,4 libras (0,18 kg) de ar fresco por minuto por qualquer período que exceda cinco minutos.

(d) Para aviões a jato pressurizados que operam em altitudes acima de 41.000 pés (12.497 metros), outras condições de falha prováveis e improváveis do sistema de controle ambiental que afetem adversamente as condições ambientais dos compartimentos dos passageiros e da tripulação de voo não podem afetar o desempenho da tripulação de voo de


designed to meet the following conditions during flight above 15,000 feet mean sea level (MSL):

- (1) After any probable failure, the cabin temperature-time history may not exceed the values shown in Figure 1 of this paragraph.
- (2) After any improbable failure, the cabin temperature-time history may not exceed the values shown in Figure 2 of this paragraph.

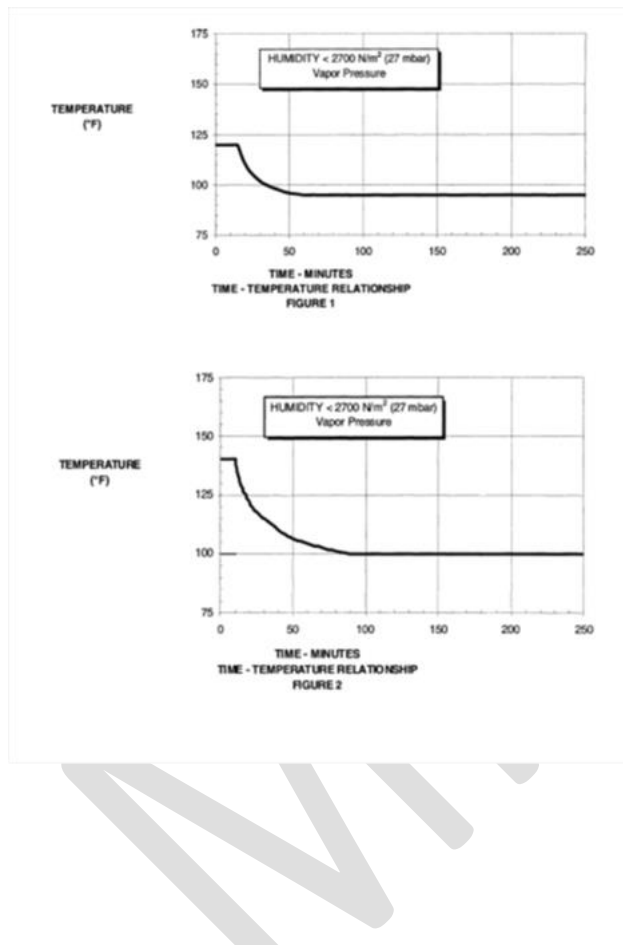

forma a resultar em uma condição perigosa e nenhum ocupante deve sofrer danos fisiológico permanente. O sistema de ar condicionado deve ser projetado para satisfazer as seguintes condições durante o voo acima de 15.000 pés acima do nível do mar (MSL):

- (1) Após qualquer falha provável, a temperatura da cabine não pode exceder os valores apresentados na figura 1 deste parágrafo.
- (2) Após qualquer falha improvável, a temperatura da cabine não pode exceder os valores apresentados na figura 2 deste parágrafo.

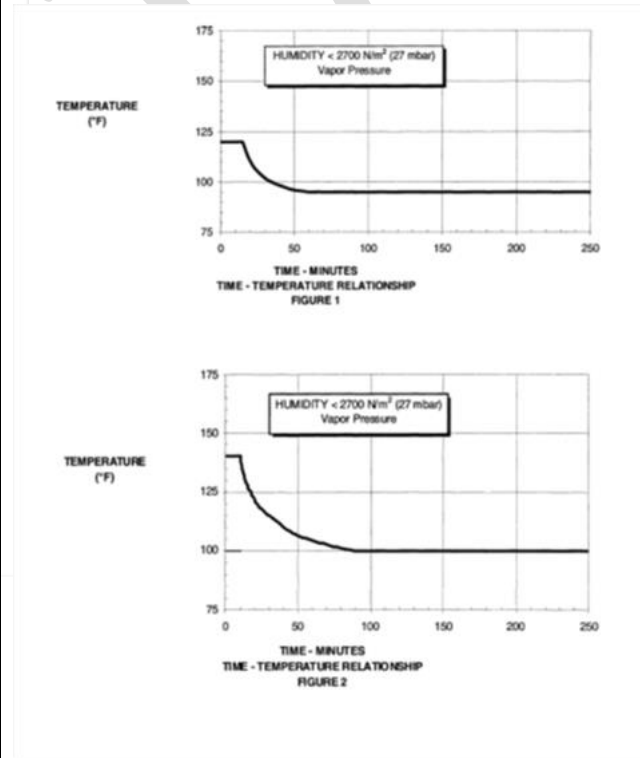

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-34, 52 FR 1831, Jan. 15, 1987; Amdt. 23-42, 56 FR 354, Jan. 3, 1991; Amdt. 23-62, 76 FR 75757, Dec. 2, 2011]

Pressurization

23.841 Pressurized cabins.

(a) If certification for operation above 25.000 feet (7.620 meters) is requested, the airplane must be able to maintain a cabin pressure altitude of not more than 15.000 feet (4.572

23.841 Cabines pressurizadas.

(a) Se certificação para operação acima de 25.000 pés (7.620 metros) for solicitada, o avião deve ser capaz de manter uma altitude pressão de cabine de não mais que 15.000 pés

meters), in event of any probable failure condition in the pressurization system. During decompression, the cabin altitude may not exceed 15.000 feet (4.572 meters) for more than 10 seconds and 25.000 feet (7.620 meters) for any duration.

(b) Pressurized cabins must have at least the following valves, controls, and indicators, for controlling cabin pressure:

(1) Two pressure relief valves to automatically limit the positive pressure differential to a predetermined value at the maximum rate of flow delivered by the pressure source. The combined capacity of the relief valves must be large enough so that the failure of any one valve would not cause an appreciable rise in the pressure differential. The pressure differential is positive when the internal pressure is greater than the external.

(2) Two reverse pressure differential relief valves (or their equivalent) to automatically prevent a negative pressure differential that would damage the structure. However, one valve is enough if it is of a design that reasonably precludes its malfunctioning.

(3) A means by which the pressure differential can be rapidly equalized.

(4) An automatic or manual regulator for controlling the intake or exhaust airflow, or both, for maintaining the required internal pressures and airflow rates.

(5) Instruments to indicate to the pilot the pressure differential, the cabin pressure altitude, and the rate of change of cabin pressure altitude.

(6) Warning indication at the pilot station to indicate when the safe or preset pressure differential is exceeded and when a cabin pressure altitude of 10.000 feet (3.048 meters) is exceeded. The 10.000 feet (3.048 meters) cabin altitude warning may be increased up to 15.000 feet (4.572 meters) for operations from

(4.572 metros) em caso de qualquer condição de falha provável no sistema de pressurização. Durante a descompressão, a altitude de cabine não pode exceder 15.000 pés (4.572 metros) por mais de 10 segundos e 25.000 pés (7.620 metros) por nenhuma duração.

(b) Cabines pressurizadas devem ter pelo menos as seguintes válvulas, controles e indicadores, para controlar a pressão da cabine:

(1) Duas válvulas de alívio de pressão para automaticamente limitar o diferencial de pressão positiva a um valor determinado na taxa máxima do fluxo emitido pela fonte de pressão. A capacidade combinada das válvulas de alívio deve ser grande o suficiente para que a falha de qualquer uma das válvulas não cause um aumento apreciável no diferencial de pressão. O diferencial de pressão é positivo quando a pressão interna é maior que a externa.

(2) Duas válvulas de alívio de diferencial de pressão reverso (ou seus equivalentes) para automaticamente impedir um diferencial de pressão negativo, que poderia danificar a estrutura. No entanto, uma válvula é suficiente se for de um projeto que exclui, com razoável certeza, a possibilidade de um mau funcionamento.

(3) Um meio pelo qual o diferencial de pressão possa ser rapidamente equalizado.

(4) Um regulador automático ou manual para controlar o fluxo de ar de admissão ou de exaustão, ou ambos, para manter as pressões internas e as taxas de fluxo de ar necessárias.

(5) Instrumentos para indicar ao piloto o diferencial de pressão, a altitude pressão da cabine, e a taxa de mudança da altitude pressão da cabine.

(6) Indicação de alerta na cabine para indicar quando o diferencial de pressão segura ou selecionada é excedida e quando a altitude de pressão de cabine de 10.000 pés (3.048 metros) é excedida. O alarme de altitude de cabine a

high altitude airfields (10.000 to 15.000 feet – 3.048 a 4.572 meters) provided:

(i) The landing or the take off modes (normal or high altitude) are clearly indicated to the flight crew.

(ii) Selection of normal or high altitude airfield mode requires no more than one flight crew action and goes to normal airfield mode at engine stop.

(iii) The pressurization system is designed to ensure cabin altitude does not exceed 10,000 feet when in flight above flight level (FL) 250.

(iv) The pressurization system and cabin altitude warning system is designed to ensure cabin altitude warning at 10.000 feet (3.048 meters) when in flight above FL250.

(7) A warning placard for the pilot if the structure is not designed for pressure differentials up to the maximum relief valve setting in combination with landing loads.

(8) A means to stop rotation of the compressor or to divert airflow from the cabin if continued rotation of an engine-driven cabin compressor or continued flow of any compressor bleed air will create a hazard if a malfunction occurs.

(c) If certification for operation above 41.000 feet (12.497 meters) and not more than 45,000 feet (13.716 meters) is requested:

(1) The airplane must prevent cabin pressure altitude from exceeding the following after decompression from any probable pressurization system failure in conjunction with any undetected, latent pressurization system failure condition:

(i) If depressurization analysis shows that the cabin altitude does not exceed 25.000 feet (7.620 meters), the pressurization system must prevent the cabin altitude from exceeding the cabin altitude-time history shown in Figure 1 of

10.000 pés (3.048 metros) pode ser elevado até 15.000 pés (4.572 metros) para operações em aeródromos a alta altitude (10.000 a 15.000 pés – 3.048 a 4.572 metros) desde que:

(i) Os modos (normal ou alta altitude) de pouso ou decolagem sejam claramente indicados à tripulação de voo.

(ii) A seleção dos modos normal ou alta altitude requeira não mais que uma ação por parte da tripulação de voo e retorne para o modo normal quando da parada dos motores.

(iii) O sistema de pressurização seja projetado para garantir que a altitude de cabine não exceda 10.000 pés (3.048 metros) quando em voo acima do nível de voo (FL) 250.

(iv) O sistema de pressurização e alerta de altitude de cabine seja projetado para garantir um alarme a 10.000 pés (3.048 metros) quando em voo acima do FL 250.

(7) Um placar de alarme para o piloto se a estrutura não for projetada para diferenciais de pressão de até o ajuste máximo da válvula de alívio em combinação com as cargas de pouso.

(8) Um meio de parar a rotação do compressor ou desviar o fluxo de ar da cabine caso a rotação contínua do compressor de cabine movido pelo motor ou o fluxo contínuo de qualquer ar de sangria do compressor possa criar um perigo caso um mau funcionamento ocorra.

(c) Se certificação para operação acima de 41.000 pés (12.497 metros) e não mais que 45.000 pés (13.716 metros) é solicitada-

(1) O avião deve impedir que a altitude pressão de cabine exceda o que se segue após decompressão causada por qualquer falha provável do sistema de pressurização em conjunção com qualquer condição de falha latente e não detectada do sistema de pressurização:

this section.

(ii) Maximum cabin altitude is limited to 30.000 feet (9.144 meters). If cabin altitude exceeds 25.000 feet (7.620 meters), the maximum time the cabin altitude may exceed 25.000 feet (7.620 meters) is 2 minutes; time starting when the cabin altitude exceeds 25.000 feet (7.620 meters) and ending when it returns to 25.000 feet (7.620 meters).

(2) The airplane must prevent cabin pressure altitude from exceeding the following after decompression from any single pressurization system failure in conjunction with any probable fuselage damage:

(i) If depressurization analysis shows that the cabin altitude does not exceed 37.000 feet (11.278 meters), the pressurization system must prevent the cabin altitude from exceeding the cabin altitude-time history shown in Figure 2 of this section.

(ii) Maximum cabin altitude is limited to 40.000 feet (12.192 meters). If cabin altitude exceeds 37.000 feet (11.278 meters), the maximum time the cabin altitude may exceed 25.000 feet (7.620 meters) is 2 minutes; time starting when the cabin altitude exceeds 25.000 feet (7.620 meters) and ending when it returns to 25.000 feet (7.620 meters).

(3) In showing compliance with paragraphs (c)(1) and (c)(2) of this section, it may be assumed that an emergency descent is made by an approved emergency procedure. A 17-second flight crew recognition and reaction time must be applied between cabin altitude warning and the initiation of an emergency descent. Fuselage structure, engine and system failures are to be considered in evaluating the cabin decompression.

(i) Se a análise de depressurização mostrar que a altitude de cabine não excede 25.000 pés (7.620 metros), o sistema de pressurização deve impedir que a altitude de cabine exceda os valores mostrados no gráfico de altitude de cabine da Figura 1 desta seção.

(ii) A máxima altitude de cabine é limitada a 30.000 pés (9.144 metros). Se a altitude de cabine exceder 25.000 pés (7.620 metros), o tempo máximo durante o qual a altitude de cabine pode exceder 25.000 pés (7.620 metros) é de 2 minutos; iniciando a contagem do tempo quando a altitude de cabine exceder 25.000 pés (7.620 metros) e terminando quando ela retornar a 25.000 pés (7.620 metros).

(2) O avião deve impedir que a altitude pressão de cabine exceda o que se segue após decompressão causada por qualquer falha simples do sistema de pressurização em conjunção com qualquer dano provável à fuselagem:

(i) Se a análise de depressurização mostrar que a altitude de cabine não excede 37.000 pés (11.278 metros), o sistema de pressurização deve impedir que a altitude de cabine exceda os valores mostrados no gráfico de altitude de cabine da Figura 2 desta seção.

(ii) A máxima altitude de cabine é limitada a 40.000 pés (12.192 metros). Se a altitude de cabine exceder 37.000 pés (11.278 metros), o tempo máximo durante o qual a altitude de cabine pode exceder 25.000 pés (7.620 metros) é de 2 minutos; iniciando a contagem do tempo quando a altitude de cabine exceder 25.000 pés (7.620 metros) e terminando quando ela retornar a 25.000 pés (7.620 metros).

(3) Ao demonstrar cumprimento com os parágrafos (c)(1) e (c)(2) desta seção, pode-se assumir que uma descida de emergência seja feita seguindo um procedimento de emergência aprovado. Um tempo de 17 segundos para reconhecimento e reação por parte da tripulação de voo deve ser considerado entre o alarme de altitude de cabine e o início de uma

FIGURE 1—Cabin Altitude--Time History

Note: For Figure 1, time starts at the moment cabin altitude exceeds 10,000 feet during decompression.

FIGURE 2—Cabin Altitude--Time History

Note: For Figure 2, time starts at the moment cabin altitude exceeds 10,000 feet during decompression.

(d) If certification for operation above 45.000 feet (13.176 meters) and not more than 51.000 feet (15.545 meters) is requested:

- (1) Pressurized cabins must be equipped to provide a cabin pressure altitude of not more than 8.000 feet (2.438 meters) at the maximum operating altitude of the airplane under normal operating conditions.
- (2) The airplane must prevent cabin pressure altitude from exceeding the following after decompression from any failure condition not shown to be extremely improbable:
 - (i) Twenty-five thousand (25.000) feet (7.620 meters) for more than 2 minutes; or
 - (ii) Forty thousand (40.000) feet (12.192 meters) for any duration.
- (3) Fuselage structure, engine and system failures are to be considered in evaluating the cabin decompression.
- (4) In addition to the cabin altitude indicating

descida de emergência. Falhas estruturais da fuselagem, falhas de motor e falhas de sistema devem ser consideradas ao avaliar a descompressão de cabine.

FIGURE 1—Cabin Altitude--Time History

Note: For Figure 1, time starts at the moment cabin altitude exceeds 10,000 feet during decompression.

FIGURE 2—Cabin Altitude--Time History

Note: For Figure 2, time starts at the moment cabin altitude exceeds 10,000 feet during decompression.

(d) Se certificação para operação acima de 45.000 pés (13.176 metros) e não mais que 51.000 pés (15.545 metros) é solicitada:

- (1) Cabines pressurizadas devem ser equipadas para prover uma altitude pressão de cabine de não mais que 8.000 pés (2.438 metros) na máxima altitude de operação do avião sob condições normais de operação.
- (2) O avião deve impedir que a altitude pressão de cabine exceda o que se segue após descompressão causada por qualquer condição de falha que não tenha sido demonstrada ser extremamente improvável:
 - (i) Vinte e cinco mil (25.000) pés (7.620 metros) por mais de 2 minutos; ou
 - (ii) Quarenta mil (40.000) pés (12.192 metros)

<p>means in paragraph (b)(6) of this section, an aural or visual signal must be provided to warn the flight crew when the cabin pressure altitude exceeds 10.000 feet (3.048 meters).</p> <p>(5) The sensing system and pressure sensors necessary to meet the requirements of paragraphs (b)(5), (b)(6), and (d)(4) of this section and paragraph 23.1447(e) of this RBAC, must, in the event of low cabin pressure, actuate the required warning and automatic presentation devices without any delay that would significantly increase the hazards resulting from decompression.</p>	<p>por qualquer duração.</p> <p>(3) Falhas estruturais da fuselagem, falhas de motor e falhas de sistema devem ser consideradas ao avaliar a descompressão de cabine.</p> <p>(4) Em adição aos meios de indicação de altitude de cabine em (b)(6) desta seção, um sinal aural ou visual deve ser provido para alertar a tripulação de voo quando a altitude pressão de cabine exceder 10.000 pés (3.048 metros).</p> <p>(5) O sistema de sensoriamento e os sensores de pressão necessários para atender os requisitos de (b)(5), (b)(6) e (d)(4) desta seção e parágrafo 23.1447(e), devem, no evento de baixa pressão de cabine, disparar o alarme requerido e os dispositivos de apresentação automática sem qualquer atraso que aumentaria significativamente os perigos resultantes da descompressão.</p>
---	--

[Amdt. 23-14, 38 FR 31822, Nov. 19, 1973, as amended by Amdt. 23-17, 41 FR 55464, Dec. 20, 1976; Amdt. 23-49, 61 FR 5167, Feb. 9, 1996; Amdt. 23-62, 76 FR 75757, Dec. 2, 2011]

§ 23.843 Pressurization tests.

(a) Strength test. The complete pressurized cabin, including doors, windows, canopy, and valves, must be tested as a pressure vessel for the pressure differential specified in §23.365(d).

(b) Functional tests. The following functional tests must be performed:

(1) Tests of the functioning and capacity of the positive and negative pressure differential valves, and of the emergency release valve, to simulate the effects of closed regulator valves.

(2) Tests of the pressurization system to show proper functioning under each possible condition of pressure, temperature, and moisture, up to the maximum altitude for which certification is requested.

(3) Flight tests, to show the performance of the pressure supply, pressure and flow regulators, indicators, and warning signals, in steady and stepped climbs and descents at rates corresponding to the maximum attainable within the operating limitations of the airplane, up to the maximum altitude for which certification is requested.

(4) Tests of each door and emergency exit, to show that they operate properly after being subjected to the flight tests prescribed in paragraph (b)(3) of this section.

Fire Protection**§ 23.851 Fire extinguishers.**

- (a) There must be at least one hand fire extinguisher for use in the pilot compartment that is located within easy access of the pilot while seated.
- (b) There must be at least one hand fire extinguisher located conveniently in the passenger compartment—
- (1) Of each airplane accommodating more than 6 passengers; and
 - (2) Of each commuter category airplane.
- (c) For hand fire extinguishers, the following apply:
- (1) The type and quantity of each extinguishing agent used must be appropriate to the kinds of fire likely to occur where that agent is to be used.
 - (2) Each extinguisher for use in a personnel compartment must be designed to minimize the hazard of toxic gas concentrations.

[Doc. No. 26269, 58 FR 42165, Aug. 6, 1993]

<p>23.853 Passenger and crew compartment interiors.</p> <p>For each compartment to be used by the crew or passengers:</p> <p>(a) The materials must be at least flame-resistant;</p> <p>(b) [Reserved]</p> <p>(c) If smoking is to be prohibited, there must be a placard so stating, and if smoking is to be allowed:</p> <ol style="list-style-type: none"> (1) There must be an adequate number of self-contained, removable ashtrays; and (2) Where the crew compartment is separated from the passenger compartment, there must be at least one illuminated sign (using either letters or symbols) notifying all passengers when smoking is prohibited. Signs which notify when smoking is prohibited must— 	<p>23.853 Interiores de compartimentos da tripulação e de passageiros.</p> <p>Para cada compartimento a ser usado pela tripulação ou passageiros:</p> <p>(a) Os materiais devem ser pelo menos resistentes à chama;</p> <p>(b) [Reservado]</p> <p>(c) Se fumar for proibido, deve haver um placar declarando a proibição, e se fumar for permitido:</p> <ol style="list-style-type: none"> (1) Deve haver um número adequado de cinzeiros fechados e removíveis; e (2) Onde o compartimento de tripulação é separado do compartimento de passageiros, deve haver pelo menos um sinal iluminado (usando letras ou símbolos) avisando a todos os passageiros quando fumar é proibido. Os sinais que avisam quando fumar é proibido devem:
---	--

<p>(i) When illuminated, be legible to each passenger seated in the passenger cabin under all probable lighting conditions; and</p> <p>(ii) Be so constructed that the crew can turn the illumination on and off; and</p> <p>(d) In addition, for commuter category airplanes the following requirements apply:</p> <p>(1) Each disposal receptacle for towels, paper, or waste must be fully enclosed and constructed of at least fire resistant materials and must contain fires likely to occur in it under normal use. The ability of the disposal receptacle to contain those fires under all probable conditions of wear, misalignment, and ventilation expected in service must be demonstrated by test. A placard containing the legible words "No Cigarette Disposal" must be located on or near each disposal receptacle door.</p> <p>(2) Lavatories must have "No Smoking" or "No Smoking in Lavatory" placards located conspicuously on each side of the entry door.</p> <p>(3) Materials (including finishes or decorative surfaces applied to the materials) used in each compartment occupied by the crew or passengers must meet the following test criteria as applicable:</p> <p>(i) Interior ceiling panels, interior wall panels, partitions, galley structure, large cabinet walls, structural flooring, and materials used in the construction of stowage compartments (other than underseat stowage compartments and compartments for stowing small items such as magazines and maps) must be self-extinguishing when tested vertically in accordance with the applicable portions of appendix F of this RBAC or by other equivalent methods. The average burn length may not exceed 6 inches (150 mm) and the average flame time after removal of the flame source may not exceed 15 seconds. Drippings from the test specimen may not continue to flame for more than an average of 3 seconds</p>	<p>(i) Quando iluminado, ser legíveis a cada passageiro sentado na cabine de passageiros em todas as condições de iluminação prováveis; e</p> <p>(ii) Ser construídos de modo que a tripulação possa ligar e desligar a iluminação.</p> <p>(d) Em adição, para aviões da categoria transporte regional as seguintes exigências aplicam-se:</p> <p>(1) Cada recipiente para descarte de toalhas, papel, ou resíduos deve ser completamente fechado e construído com materiais pelo menos resistentes a fogo e deve conter o fogo provável de ocorrer em seu interior, durante o uso normal. A capacidade do recipiente para descarte, de conter esse fogo em todas as condições prováveis de uso, desalinhamento, e ventilação esperada em serviço deve ser demonstrada por ensaio. Um placar contendo as palavras legíveis 'Proibido jogar cigarro' deve estar localizado em ou perto de cada porta do recipiente disponível.</p> <p>(2) Os lavatórios devem ter placares de "É Proibido Fumar" ou "É Proibido Fumar no Lavatório" localizado visivelmente em cada lado da porta de entrada</p> <p>(3) Os materiais (inclusive acabamentos ou superfícies decorativas aplicadas aos materiais) usados em cada compartimento ocupado pela tripulação ou passageiros devem atender aos seguintes critérios de ensaio como aplicável:</p> <p>(i) Os painéis internos do teto, os painéis internos de parede, as divisórias, a estrutura da copa, as grandes paredes dos gabinetes, a estrutura do piso, e os materiais usados na construção do compartimento de carga (exceto os compartimentos de bagagem embaixo do assento e compartimentos para alojar pequenos itens como revistas e mapas) devem ser auto extingüíveis quando testados verticalmente de acordo com as partes aplicáveis do apêndice F deste RBAC ou por outros métodos equivalentes. O comprimento médio de queima não pode exceder 6 polegadas (150 mm) e o</p>
--	---

after falling.

(ii) Floor covering, textiles (including draperies and upholstery), seat cushions, padding, decorative and nondecorative coated fabrics, leather, trays and galley furnishings, electrical conduit, thermal and acoustical insulation and insulation covering, air ducting, joint and edge covering, cargo compartment liners, insulation blankets, cargo covers and transparencies, molded and thermoformed parts, air ducting joints, and trim strips (decorative and chafing), that are constructed of materials not covered in paragraph (d)(3)(iv) of this section must be self extinguishing when tested vertically in accordance with the applicable portions of appendix F of this RBAC or other approved equivalent methods. The average burn length may not exceed 8 inches (200 mm) and the average flame time after removal of the flame source may not exceed 15 seconds. Drippings from the test specimen may not continue to flame for more than an average of 5 seconds after falling.

(iii) Motion picture film must be safety film meeting the Standard Specifications for Safety Photographic Film PH1.25 (available from the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018, USA) or an ANAC approved equivalent. If the film travels through ducts, the ducts must meet the requirements of paragraph (d)(3)(ii) of this section.

(iv) Acrylic windows and signs, parts constructed in whole or in part of elastomeric materials, edge-lighted instrument assemblies consisting of two or more instruments in a common housing, seatbelts, shoulder harnesses, and cargo and baggage tiedown equipment, including containers, bins, pallets, etc., used in passenger or crew compartments, may not have an average burn rate greater than 2,5 inches per minute (60 mm/min) when tested horizontally in accordance with the applicable portions of appendix F of this RBAC or by other approved equivalent methods.

tempo médio de chama depois da retirada da fonte de chama não pode exceder 15 segundos. O gotejamento vindo do corpo de prova não pode continuar em chamas por um tempo superior a uma média de 3 segundos depois da queda.

(ii) A cobertura do piso, tecidos (inclusive tapeçaria e estofamento), almofadas de assento, enchimento, tecidos de revestimento decorativos e não decorativos, couro, bandejas e mobiliário da copa, conduíte elétrico, isolamento térmico e acústico e cobertura do isolamento, dutos de ar, união e cobertura de arestas, forro do compartimento de carga, isolante termo acústico, coberturas de carga e objetos transparentes, partes moldadas e termo moldadas, uniões de dutos de ar, e faixas de acabamento (decorativo e de atrito), que são construídos de materiais não cobertos no parágrafo (d)(3)(iv) desta seção devem ser auto extingüíveis quando ensaiados verticalmente de acordo com as partes aplicáveis do Apêndice F deste RBAC ou outros métodos equivalentes aprovados. O comprimento médio da queima não pode exceder 8 polegadas (200 mm) e o tempo médio de chama depois de retirada a fonte da chama não pode exceder 15 segundos. O gotejamento vindo do corpo de prova não pode continuar em chamas por um tempo superior a uma média de 5 segundos depois da queda.

(iii) A película de filme cinematográfico deve ser uma película de segurança que satisfaça as Especificações Padrões de Filme Fotográfico de Segurança PH1.25 (disponível no American National Standards Institute, 1430 Broadway, New York, N.Y. 10018, EUA) ou um equivalente aprovado pela ANAC. Se o filme passar através de dutos, os dutos devem atender aos requisitos do parágrafo (d)(3)(ii) desta seção.

(iv) As janelas acrílicas e os sinais, peças construídas no todo ou em parte por material elastomérico, reunião de instrumentos com iluminação de canto composto de dois ou mais instrumentos em um alojamento comum, cintos

(v) Except for electrical wire cable insulation, and for small parts (such as knobs, handles, rollers, fasteners, clips, grommets, rub strips, pulleys, and small electrical parts) that the Administrator finds would not contribute significantly to the propagation of a fire, materials in items not specified in paragraphs (d)(3)(i), (ii), (iii), or (iv) of this section may not have a burn rate greater than 4,0 inches per minute (100 mm/min) when tested horizontally in accordance with the applicable portions of appendix F of this RBAC or by other approved equivalent methods.

(e) Lines, tanks, or equipment containing fuel, oil, or other flammable fluids may not be installed in such compartments unless adequately shielded, isolated, or otherwise protected so that any breakage or failure of such an item would not create a hazard.

(f) Airplane materials located on the cabin side of the firewall must be self-extinguishing or be located at such a distance from the firewall, or otherwise protected, so that ignition will not occur if the firewall is subjected to a flame temperature of not less than 2.000 °F (1.093,33 °C) for 15 minutes. For self-extinguishing materials (except electrical wire and cable insulation and small parts that the Administrator finds would not contribute significantly to the propagation of a fire), a vertical self-extinguishing test must be conducted in accordance with appendix F of this RBAC or an equivalent method approved by the Administrator. The average burn length of the material may not exceed 6 inches (150 mm) and the average flame time after removal of the flame source may not exceed 15 seconds. Drippings from the material test specimen may not continue to flame for more than an average of 3 seconds after falling.

de segurança, cintos de ombro, e equipamento para prender carga e bagagem, inclusive containeres, caixas, pallets, etc., usado nos compartimentos de passageiros ou de tripulação, não podem ter uma taxa média de queima maior do que 2,5 polegadas por minuto (60 mm/min) quando ensaiados horizontalmente conforme as partes aplicáveis do apêndice F deste RBAC ou por outros métodos equivalentes aprovados.

(v) Exceto para cabo de isolamento de fio elétrico, e para pequenas peças (como puxadores, maçanetas, rolos, prendedores, cliques, anéis isolantes, tiras de borracha, roldanas, e pequenas partes elétricas) que a ANAC entender que não contribuiriam significativamente para a propagação de um fogo, os materiais dos itens não especificados em (d)(3)(i), (ii), (iii), ou (iv) desta seção não podem ter uma taxa de queima maior do que 4,0 polegadas por minuto (100 mm/min) quando ensaiado horizontalmente em acordo com as partes aplicáveis do apêndice F deste RBAC ou por outros métodos equivalentes aprovados.

(e) As linhas, tanques, ou os equipamentos que contêm combustível, óleo, ou outros fluidos inflamáveis não podem ser instalados em tais compartimentos a menos que adequadamente protegidos, isolados, ou de outra maneira protegidos para que qualquer quebra ou falha de tal item não crie um risco.

(f) Os materiais do avião localizados na cabine do lado da parede de fogo devem ser auto extingüível ou estar localizado a certa distância da parede de fogo, ou de outra maneira protegidos, para que a ignição não ocorra se a parede de fogo for submetida a uma temperatura de chama de não menos de 2.000 °F (1.093,33 °C) durante 15 minutos. Para materiais auto extingüíveis (exceto fio elétrico e isolamento de cabos e pequenas partes que a ANAC entender que não contribuiriam significativamente para a propagação de um fogo), um ensaio de auto extinção vertical deve ser conduzida em acordo com o apêndice F

	deste RBAC ou um método equivalente aprovado pela ANAC. O comprimento médio de queima do material não pode exceder 6 polegadas (150 mm) e o tempo médio de chama depois da retirada da fonte de chama não pode exceder 15 segundos. O gotejamento vindo do material do corpo de prova não pode continuar em chamas por mais que uma média de 3 segundos depois da queda.
--	--

[Amdt. 23-14, 23 FR 31822, Nov. 19, 1973, as amended by Amdt. 23-23, 43 FR 50593, Oct. 30, 1978; Amdt. 23-25, 45 FR 7755, Feb. 4, 1980; Amdt. 23-34, 52 FR 1831, Jan. 15, 1987; Amdt. 23-62, 76 FR 75759, Dec. 2, 2011]

§ 23.855 Cargo and baggage compartment fire protection.

- (a) Sources of heat within each cargo and baggage compartment that are capable of igniting the compartment contents must be shielded and insulated to prevent such ignition.
- (b) Each cargo and baggage compartment must be constructed of materials that meet the appropriate provisions of §23.853(d)(3).
- (c) In addition, for commuter category airplanes, each cargo and baggage compartment must:
- (1) Be located where the presence of a fire would be easily discovered by the pilots when seated at their duty station, or it must be equipped with a smoke or fire detector system to give a warning at the pilots' station, and provide sufficient access to enable a pilot to effectively reach any part of the compartment with the contents of a hand held fire extinguisher, or
 - (2) Be equipped with a smoke or fire detector system to give a warning at the pilots' station and have ceiling and sidewall liners and floor panels constructed of materials that have been subjected to and meet the 45 degree angle test of appendix F of this part. The flame may not penetrate (pass through) the material during application of the flame or subsequent to its removal. The average flame time after removal of the flame source may not exceed 15 seconds, and the average glow time may not exceed 10 seconds. The compartment must be constructed to provide fire protection that is not less than that required of its individual panels; or
 - (3) Be constructed and sealed to contain any fire within the compartment.

[Doc. No. 27806, 61 FR 5167, Feb. 9, 1996]

<p>23.856 Thermal/acoustic insulation materials.</p> <p>Thermal/acoustic insulation material installed in the fuselage must meet the flame propagation test requirements of part II of Appendix F to this RBAC, or other approved equivalent test requirements. This requirement</p>	<p>23.856 Materiais de isolamento térmico/acústico.</p> <p>Materiais de isolamento térmico/acústico instalados na fuselagem devem atender aos requisitos de ensaio de propagação de chama da parte II do apêndice F deste regulamento, ou outros requisitos de teste equivalentes</p>
---	--

does not apply to “small parts,” as defined in paragraph 23.853(d)(3)(v).	aprovados. Esta exigência não se aplica a “peças pequenas”, conforme definido no parágrafo 23.853(d)(3)(v).
---	---

[Amdt. 23-62, 76 FR 75759, Dec. 2, 2011]

§ 23.859 Combustion heater fire protection.

(a) Combustion heater fire regions. The following combustion heater fire regions must be protected from fire in accordance with the applicable provisions of §§23.1182 through 23.1191 and 23.1203:

(1) The region surrounding the heater, if this region contains any flammable fluid system components (excluding the heater fuel system) that could—

(i) Be damaged by heater malfunctioning; or

(ii) Allow flammable fluids or vapors to reach the heater in case of leakage.

(2) The region surrounding the heater, if the heater fuel system has fittings that, if they leaked, would allow fuel vapor to enter this region.

(3) The part of the ventilating air passage that surrounds the combustion chamber.

(b) Ventilating air ducts. Each ventilating air duct passing through any fire region must be fireproof. In addition—

(1) Unless isolation is provided by fireproof valves or by equally effective means, the ventilating air duct downstream of each heater must be fireproof for a distance great enough to ensure that any fire originating in the heater can be contained in the duct; and

(2) Each part of any ventilating duct passing through any region having a flammable fluid system must be constructed or isolated from that system so that the malfunctioning of any component of that system cannot introduce flammable fluids or vapors into the ventilating airstream.

(c) Combustion air ducts. Each combustion air duct must be fireproof for a distance great enough to prevent damage from backfiring or reverse flame propagation. In addition—

(1) No combustion air duct may have a common opening with the ventilating airstream unless flames from backfires or reverse burning cannot enter the ventilating airstream under any operating condition, including reverse flow or malfunctioning of the heater or its associated components; and

(2) No combustion air duct may restrict the prompt relief of any backfire that, if so restricted, could cause heater failure.

(d) Heater controls: general. Provision must be made to prevent the hazardous accumulation of water or ice on or in any heater control component, control system tubing, or safety control.

(e) Heater safety controls. (1) Each combustion heater must have the following safety controls:

(i) Means independent of the components for the normal continuous control of air temperature, airflow, and fuel flow must be provided to automatically shut off the ignition and fuel supply to that heater at a point remote from that heater when any of the following occurs:

- (A) The heater exchanger temperature exceeds safe limits.
- (B) The ventilating air temperature exceeds safe limits.
- (C) The combustion airflow becomes inadequate for safe operation.
- (D) The ventilating airflow becomes inadequate for safe operation.

(ii) Means to warn the crew when any heater whose heat output is essential for safe operation has been shut off by the automatic means prescribed in paragraph (e)(1)(i) of this section.

(2) The means for complying with paragraph (e)(1)(i) of this section for any individual heater must—

(i) Be independent of components serving any other heater whose heat output is essential for safe operations; and

(ii) Keep the heater off until restarted by the crew.

(f) Air intakes. Each combustion and ventilating air intake must be located so that no flammable fluids or vapors can enter the heater system under any operating condition—

(1) During normal operation; or

(2) As a result of the malfunctioning of any other component.

(g) Heater exhaust. Heater exhaust systems must meet the provisions of §§23.1121 and 23.1123. In addition, there must be provisions in the design of the heater exhaust system to safely expel the products of combustion to prevent the occurrence of—

(1) Fuel leakage from the exhaust to surrounding compartments;

(2) Exhaust gas impingement on surrounding equipment or structure;

(3) Ignition of flammable fluids by the exhaust, if the exhaust is in a compartment containing flammable fluid lines; and

(4) Restrictions in the exhaust system to relieve backfires that, if so restricted, could cause heater failure.

(h) Heater fuel systems. Each heater fuel system must meet each powerplant fuel system requirement affecting safe heater operation. Each heater fuel system component within the ventilating airstream must be protected by shrouds so that no leakage from those components can enter the ventilating airstream.

(i) Drains. There must be means to safely drain fuel that might accumulate within the combustion chamber or the heater exchanger. In addition—

(1) Each part of any drain that operates at high temperatures must be protected in the same manner as heater exhausts; and

(2) Each drain must be protected from hazardous ice accumulation under any operating condition.

[Amdt. 23–27, 45 FR 70387, Oct. 23, 1980]

§ 23.863 Flammable fluid fire protection.

(a) In each area where flammable fluids or vapors might escape by leakage of a fluid system, there must be means to minimize the probability of ignition of the fluids and vapors, and the resultant hazard if ignition does occur.

(b) Compliance with paragraph (a) of this section must be shown by analysis or tests, and the following factors must be considered:

(1) Possible sources and paths of fluid leakage, and means of detecting leakage.

(2) Flammability characteristics of fluids, including effects of any combustible or absorbing materials.

(3) Possible ignition sources, including electrical faults, overheating of equipment, and malfunctioning of protective devices.

(4) Means available for controlling or extinguishing a fire, such as stopping flow of fluids, shutting down equipment, fireproof containment, or use of extinguishing agents.

(5) Ability of airplane components that are critical to safety of flight to withstand fire and heat.

(c) If action by the flight crew is required to prevent or counteract a fluid fire (e.g. equipment shutdown or actuation of a fire extinguisher), quick acting means must be provided to alert the crew.

(d) Each area where flammable fluids or vapors might escape by leakage of a fluid system must be identified and defined.

[Amdt. 23–23, 43 FR 50593, Oct. 30, 1978]

§ 23.865 Fire protection of flight controls, engine mounts, and other flight structure.

Flight controls, engine mounts, and other flight structure located in designated fire zones, or in adjacent areas that would be subjected to the effects of fire in the designated fire zones, must be constructed of fireproof material or be shielded so that they are capable of withstanding the effects of a fire. Engine vibration isolators must incorporate suitable features to ensure that the engine is retained if the non-fireproof portions of the isolators deteriorate from the effects of a fire.

[Doc. No. 27805, 61 FR 5148, Feb. 9, 1996]

Electrical Bonding and Lightning Protection

§ 23.867 Electrical bonding and protection against lightning and static electricity.

- (a) The airplane must be protected against catastrophic effects from lightning.
- (b) For metallic components, compliance with paragraph (a) of this section may be shown by—
 - (1) Bonding the components properly to the airframe; or
 - (2) Designing the components so that a strike will not endanger the airplane.
- (c) For nonmetallic components, compliance with paragraph (a) of this section may be shown by—
 - (1) Designing the components to minimize the effect of a strike; or
 - (2) Incorporating acceptable means of diverting the resulting electrical current so as not to endanger the airplane.

[Amdt. 23–7, 34 FR 13092, Aug. 13, 1969]

Miscellaneous

§ 23.871 Leveling means.

There must be means for determining when the airplane is in a level position on the ground.

[Amdt. 23–7, 34 FR 13092, Aug. 13, 1969]

Subpart E—Powerplant

General

§ 23.901 Installation.

- (a) For the purpose of this part, the airplane powerplant installation includes each component that—
 - (1) Is necessary for propulsion; and
 - (2) Affects the safety of the major propulsive units.
- (b) Each powerplant installation must be constructed and arranged to—
 - (1) Ensure safe operation to the maximum altitude for which approval is requested.
 - (2) Be accessible for necessary inspections and maintenance.
- (c) Engine cowls and nacelles must be easily removable or openable by the pilot to provide

adequate access to and exposure of the engine compartment for preflight checks.

(d) Each turbine engine installation must be constructed and arranged to—

(1) Result in carcass vibration characteristics that do not exceed those established during the type certification of the engine.

(2) Ensure that the capability of the installed engine to withstand the ingestion of rain, hail, ice, and birds into the engine inlet is not less than the capability established for the engine itself under §23.903(a)(2).

(e) The installation must comply with—

(1) The instructions provided under the engine type certificate and the propeller type certificate.

(2) The applicable provisions of this subpart.

(f) Each auxiliary power unit installation must meet the applicable portions of this part.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13092, Aug. 13, 1969; Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–29, 49 FR 6846, Feb. 23, 1984; Amdt. 23–34, 52 FR 1832, Jan. 15, 1987; Amdt. 23–34, 52 FR 34745, Sept. 14, 1987; Amdt. 23–43, 58 FR 18970, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996; Amdt. 23–53, 63 FR 14797, Mar. 26, 1998]

23.903 Engines.	23.903 Motores.
<p>(a) Engine type certificate.</p> <p>(1) Each engine must have a type certificate and must meet the applicable requirements of RBAC 34.</p> <p>(2) Each turbine engine and its installation must comply with one of the following:</p> <p>(i) Sections 33.76, 33.77 and 33.78 of the RBHA 33 in effect on December 13, 2000, or as subsequently amended; or</p> <p>(ii) Sections 33.77 and 33.78 of the RBHA 33 in effect on April 30, 1998, or as subsequently amended before December 13, 2000; or</p> <p>(iii) Section 33.77 of the RBHA 33 in effect on October 31, 1974, or as subsequently amended before April 30, 1998, unless that engine's foreign object ingestion service history has</p>	<p>(a) Certificado de tipo do motor</p> <p>(1) Cada motor deve possuir um certificado de tipo e deve satisfazer os requisitos aplicáveis do RBAC 34.</p> <p>(2) Cada motor à turbina e sua instalação deve cumprir com uma das seguintes opções:</p> <p>(i) Seções 33.76, 33.77 e 33.78 do RBHA 33 efetivos em 13 de Dezembro de 2000, ou emendas subsequentes; ou</p> <p>(ii) Seções 33.77 e 33.78 do RBHA 33 efetivos em 30 de Abril de 1998, ou emendas subsequentes antes de 13 de Dezembro de 2000; ou</p> <p>(iii) Seção 33.77 do RBHA 33 efetivos em 31 de Outubro de 1974 ou emendas subsequentes antes de 30 de Abril de 1998, a não ser que a vida em serviço do motor indique que a</p>

<p>resulted in an unsafe condition; or</p> <p>(iv) Be shown to have a foreign object ingestion service history in similar installation locations which has not resulted in any unsafe condition.</p> <p>(b) Turbine engine installations. For turbine engine installations:</p> <p>(1) Design precautions must be taken to minimize the hazards to the airplane in the event of an engine rotor failure or of a fire originating inside the engine which burns through the engine case.</p> <p>(2) The powerplant systems associated with engine control devices, systems, and instrumentation must be designed to give reasonable assurance that those operating limitations that adversely affect turbine rotor structural integrity will not be exceeded in service.</p> <p>(3) For engines embedded in the fuselage behind the cabin, the effects of a fan exiting forward of the inlet case (fan disconnect) must be addressed, the passengers must be protected, and the airplane must be controllable to allow for continued safe flight and landing.</p> <p>(c) Engine isolation. The powerplants must be arranged and isolated from each other to allow operation, in at least one configuration, so that the failure or malfunction of any engine, or the failure or malfunction (including destruction by fire in the engine compartment) of any system that can affect an engine (other than a fuel tank if only one fuel tank is installed), will not:</p> <p>(1) Prevent the continued safe operation of the remaining engines; or</p> <p>(2) Require immediate action by any crewmember for continued safe operation of the remaining engines.</p> <p>(d) Starting and stopping (piston engine).</p>	<p>ingestão de objetos externos resulta em uma condição insegura; ou</p> <p>(iv) Ser demonstrado, através de um histórico em serviço, que ingestão de objetos externos em instalações similares não resulta em alguma condição insegura.</p> <p>(b) Instalações de turbinas. Para instalações de turbinas:</p> <p>(1) Devem ser tomadas precauções no projeto com o objetivo de minimizar os perigos para o avião, causados por uma falha de rotor do motor ou por fogo originado dentro do motor que atravessa a carcaça do motor.</p> <p>(2) Os sistemas do grupo motopropulsor associados com dispositivos, sistemas e instrumentação do controle do motor devem ser projetados para prover uma garantia razoável que as limitações operacionais que afetam negativamente a integridade estrutural do rotor da turbina não sejam excedidas em serviço.</p> <p>(3) Para motores incorporados na fuselagem atrás da cabine, os efeitos de um fan saindo para a frente da carcaça da entrada de ar (desconexão do fan) devem ser tratados, os passageiros devem ser protegidos e o avião deve ser controlável para permitir o voo continuado e o pouso seguros.</p> <p>(c) Separação dos motores. Os grupos motopropulsores devem ser arranjados e separados um do outro para permitir a operação, ao menos em uma configuração, de forma que a falha ou mau funcionamento de qualquer motor, ou a falha ou mau funcionamento (incluindo destruição por fogo no compartimento do motor) de qualquer sistema que possa afetar um motor (exceto um tanque de combustível se houver apenas um tanque de combustível instalado) não irá:</p> <p>(1) Impedir a continuidade da operação segura dos motores remanescentes; ou</p> <p>(2) Requerer ação imediata por qualquer</p>
---	--

<p>(1) The design of the installation must be such that risk of fire or mechanical damage to the engine or airplane, as a result of starting the engine in any conditions in which starting is to be permitted, is reduced to a minimum. Any techniques and associated limitations for engine starting must be established and included in the Airplane Flight Manual, approved manual material, or applicable operating placards. Means must be provided for:</p> <p>(i) Restarting any engine of a multiengine airplane in flight, and</p> <p>(ii) Stopping any engine in flight, after engine failure, if continued engine rotation would cause a hazard to the airplane.</p> <p>(2) In addition, for commuter category airplanes, the following apply:</p> <p>(i) Each component of the stopping system on the engine side of the firewall that might be exposed to fire must be at least fire resistant.</p> <p>(ii) If hydraulic propeller feathering systems are used for this purpose, the feathering lines must be at least fire resistant under the operating conditions that may be expected to exist during feathering.</p> <p>(e) Starting and stopping (turbine engine). Turbine engine installations must comply with the following:</p> <p>(1) The design of the installation must be such that risk of fire or mechanical damage to the engine or the airplane, as a result of starting the engine in any conditions in which starting is to be permitted, is reduced to a minimum. Any techniques and associated limitations must be established and included in the Airplane Flight Manual, approved manual material, or applicable operating placards.</p> <p>(2) There must be means for stopping combustion within any engine and for stopping the rotation of any engine if continued rotation</p>	<p>membro da tripulação para a continuidade da operação segura dos motores remanescentes.</p> <p>(d) Partida e parada (motor a pistão).</p> <p>(1) O projeto da instalação deve ser tal que o risco de fogo ou dano mecânico ao motor ou ao avião, como resultado da partida do motor em qualquer condição em que a partida é permitida, seja reduzido a um mínimo. Quaisquer técnicas e limitações associadas para a partida do motor devem ser estabelecidas e incluídas no Manual de Voo, manual aprovado, ou placares operacionais aplicáveis. Devem ser fornecidos meios para:</p> <p>(i) Partir novamente em voo qualquer motor de um avião com múltiplos motores; e</p> <p>(ii) Parar qualquer motor em voo, após uma falha de motor, se a rotação continuada do motor causar um perigo ao avião.</p> <p>(2) Além disso, para aviões categoria transporte regional, o seguinte se aplica:</p> <p>(i) Cada componente do sistema de parada na parede de fogo do lado do motor que pode ser exposta ao fogo deve ser ao menos resistente a fogo.</p> <p>(ii) Se sistemas hidráulicos para o embandeiramento de hélice forem utilizados para essa finalidade, as linhas de embandeiramento devem ser ao menos resistentes a fogo nas condições de operação que são esperadas durante o embandeiramento.</p> <p>(e) Partida e parada (turbina). Instalações de turbinas devem cumprir com o seguinte:</p> <p>(1) O projeto da instalação deve ser tal que o risco de fogo ou dano mecânico ao motor ou ao avião, como resultado da partida do motor em qualquer condição em que a partida é permitida, seja reduzido a um mínimo. Quaisquer técnicas e limitações associadas para a partida do motor devem ser estabelecidas e incluídas no manual de voo aprovado, material</p>
---	---

would cause a hazard to the airplane. Each component of the engine stopping system located in any fire zone must be fire resistant. If hydraulic propeller feathering systems are used for stopping the engine, the hydraulic feathering lines or hoses must be fire resistant.

(3) It must be possible to restart an engine in flight. Any techniques and associated limitations must be established and included in the Airplane Flight Manual, approved manual material, or applicable operating placards.

(4) It must be demonstrated in flight that when restarting engines following a false start, all fuel or vapor is discharged in such a way that it does not constitute a fire hazard.

(f) Restart envelope. An altitude and airspeed envelope must be established for the airplane for in-flight engine restarting and each installed engine must have a restart capability within that envelope.

(g) Restart capability. For turbine engine powered airplanes, if the minimum windmilling speed of the engines, following the in-flight shutdown of all engines, is insufficient to provide the necessary electrical power for engine ignition, a power source independent of the engine-driven electrical power generating system must be provided to permit in-flight engine ignition for restarting.

de manual aprovado, ou placares operacionais aplicáveis.

(2) Deve haver meios de parar a combustão dentro de qualquer motor e de parar a rotação de qualquer motor se a rotação continuada causar perigo ao avião. Cada componente do sistema de parada do motor localizado em qualquer zona de fogo deve ser resistente a fogo. Se os sistemas hidráulicos para embandeiramento de hélice forem utilizados para parar o motor, as linhas hidráulicas de embandeiramento ou mangueiras devem ser resistentes a fogo.

(3) Deve ser possível partir novamente um motor em voo. Quaisquer técnicas e limitações associadas devem ser estabelecidas e incluídas no manual de Voo, manual aprovado, ou placares operacionais aplicáveis.

(4) Deve ser demonstrado em voo que em uma nova partida do motor, após uma partida falsa, todo combustível ou vapor seja descarregado de forma que não constitua um perigo de fogo.

(f) Envelope de nova partida. Deve-se estabelecer para o avião um envelope de altitude e velocidade para a nova partida do motor em voo e cada motor instalado deve possuir a capacidade de partir novamente dentro desse envelope.

(g) Capacidade de nova partida. Para aviões a turbina, se a mínima velocidade de livre rotação (windmilling) para os motores, após um apagamento em voo de todos os motores, for insuficiente para fornecer a energia elétrica necessária para a ignição do motor, uma fonte de energia independente do sistema de geração de energia elétrica acionado pelo motor deve ser fornecida para permitir a ignição do motor em voo para a nova partida.

[Amdt. 23–14, 38 FR 31822, Nov. 19, 1973]

§ 23.904 Automatic power reserve system.

If installed, an automatic power reserve (APR) system that automatically advances the power or

thrust on the operating engine(s), when any engine fails during takeoff, must comply with appendix H of this part.

[Doc. No. 26344, 58 FR 18970, Apr. 9, 1993]

§ 23.905 Propellers.

- (a) Each propeller must have a type certificate.
- (b) Engine power and propeller shaft rotational speed may not exceed the limits for which the propeller is certificated.
- (c) Each featherable propeller must have a means to unfeather it in flight.
- (d) The propeller blade pitch control system must meet the requirements of §§35.21, 35.23, 35.42 and 35.43 of this chapter.
- (e) All areas of the airplane forward of the pusher propeller that are likely to accumulate and shed ice into the propeller disc during any operating condition must be suitably protected to prevent ice formation, or it must be shown that any ice shed into the propeller disc will not create a hazardous condition.
- (f) Each pusher propeller must be marked so that the disc is conspicuous under normal daylight ground conditions.
- (g) If the engine exhaust gases are discharged into the pusher propeller disc, it must be shown by tests, or analysis supported by tests, that the propeller is capable of continuous safe operation.
- (h) All engine cowling, access doors, and other removable items must be designed to ensure that they will not separate from the airplane and contact the pusher propeller.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–26, 45 FR 60171, Sept. 11, 1980; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–43, 58 FR 18970, Apr. 9, 1993; Amdt. No. 23–59, 73 FR 63345, Oct. 24, 2008]

§ 23.907 Propeller vibration and fatigue.

This section does not apply to fixed-pitch wood propellers of conventional design.

- (a) The applicant must determine the magnitude of the propeller vibration stresses or loads, including any stress peaks and resonant conditions, throughout the operational envelope of the airplane by either:
 - (1) Measurement of stresses or loads through direct testing or analysis based on direct testing of the propeller on the airplane and engine installation for which approval is sought; or
 - (2) Comparison of the propeller to similar propellers installed on similar airplane installations for which these measurements have been made.

(b) The applicant must demonstrate by tests, analysis based on tests, or previous experience on similar designs that the propeller does not experience harmful effects of flutter throughout the operational envelope of the airplane.

(c) The applicant must perform an evaluation of the propeller to show that failure due to fatigue will be avoided throughout the operational life of the propeller using the fatigue and structural data obtained in accordance with part 35 of this chapter and the vibration data obtained from compliance with paragraph (a) of this section. For the purpose of this paragraph, the propeller includes the hub, blades, blade retention component and any other propeller component whose failure due to fatigue could be catastrophic to the airplane. This evaluation must include:

(1) The intended loading spectra including all reasonably foreseeable propeller vibration and cyclic load patterns, identified emergency conditions, allowable overspeeds and overtorques, and the effects of temperatures and humidity expected in service.

(2) The effects of airplane and propeller operating and airworthiness limitations.

[Amdt. No. 23–59, 73 FR 63345, Oct. 24, 2008]

§ 23.909 Turbocharger systems.

(a) Each turbocharger must be approved under the engine type certificate or it must be shown that the turbocharger system, while in its normal engine installation and operating in the engine environment—

(1) Can withstand, without defect, an endurance test of 150 hours that meets the applicable requirements of §33.49 of this subchapter; and

(2) Will have no adverse effect upon the engine.

(b) Control system malfunctions, vibrations, and abnormal speeds and temperatures expected in service may not damage the turbocharger compressor or turbine.

(c) Each turbocharger case must be able to contain fragments of a compressor or turbine that fails at the highest speed that is obtainable with normal speed control devices inoperative.

(d) Each intercooler installation, where provided, must comply with the following—

(1) The mounting provisions of the intercooler must be designed to withstand the loads imposed on the system;

(2) It must be shown that, under the installed vibration environment, the intercooler will not fail in a manner allowing portions of the intercooler to be ingested by the engine; and

(3) Airflow through the intercooler must not discharge directly on any airplane component (e.g., windshield) unless such discharge is shown to cause no hazard to the airplane under all operating conditions.

(e) Engine power, cooling characteristics, operating limits, and procedures affected by the

turbocharger system installations must be evaluated. Turbocharger operating procedures and limitations must be included in the Airplane Flight Manual in accordance with §23.1581.

[Amdt. 23–7, 34 FR 13092, Aug. 13, 1969, as amended by Amdt. 23–43, 58 FR 18970, Apr. 9, 1993]

§ 23.925 Propeller clearance.

Unless smaller clearances are substantiated, propeller clearances, with the airplane at the most adverse combination of weight and center of gravity, and with the propeller in the most adverse pitch position, may not be less than the following:

(a) Ground clearance. There must be a clearance of at least seven inches (for each airplane with nose wheel landing gear) or nine inches (for each airplane with tail wheel landing gear) between each propeller and the ground with the landing gear statically deflected and in the level, normal takeoff, or taxiing attitude, whichever is most critical. In addition, for each airplane with conventional landing gear struts using fluid or mechanical means for absorbing landing shocks, there must be positive clearance between the propeller and the ground in the level takeoff attitude with the critical tire completely deflated and the corresponding landing gear strut bottomed. Positive clearance for airplanes using leaf spring struts is shown with a deflection corresponding to 1.5 g.

(b) Aft-mounted propellers. In addition to the clearances specified in paragraph (a) of this section, an airplane with an aft mounted propeller must be designed such that the propeller will not contact the runway surface when the airplane is in the maximum pitch attitude attainable during normal takeoffs and landings.

(c) Water clearance. There must be a clearance of at least 18 inches between each propeller and the water, unless compliance with §23.239 can be shown with a lesser clearance.

(d) Structural clearance. There must be—

(1) At least one inch radial clearance between the blade tips and the airplane structure, plus any additional radial clearance necessary to prevent harmful vibration;

(2) At least one-half inch longitudinal clearance between the propeller blades or cuffs and stationary parts of the airplane; and

(3) Positive clearance between other rotating parts of the propeller or spinner and stationary parts of the airplane.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18971, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996; Amdt. 23–48, 61 FR 5148, Feb. 9, 1996]

§ 23.929 Engine installation ice protection.

Propellers (except wooden propellers) and other components of complete engine installations must be protected against the accumulation of ice as necessary to enable satisfactory functioning without appreciable loss of thrust when operated in the icing conditions for which certification is requested.

[Amdt. 23–14, 33 FR 31822, Nov. 19, 1973, as amended by Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.933 Reversing systems.

(a) For turbojet and turbofan reversing systems. (1) Each system intended for ground operation only must be designed so that, during any reversal in flight, the engine will produce no more than flight idle thrust. In addition, it must be shown by analysis or test, or both, that—

(i) Each operable reverser can be restored to the forward thrust position; or

(ii) The airplane is capable of continued safe flight and landing under any possible position of the thrust reverser.

(2) Each system intended for in-flight use must be designed so that no unsafe condition will result during normal operation of the system, or from any failure, or likely combination of failures, of the reversing system under any operating condition including ground operation. Failure of structural elements need not be considered if the probability of this type of failure is extremely remote.

(3) Each system must have a means to prevent the engine from producing more than idle thrust when the reversing system malfunctions; except that it may produce any greater thrust that is shown to allow directional control to be maintained, with aerodynamic means alone, under the most critical reversing condition expected in operation.

(b) For propeller reversing systems. (1) Each system must be designed so that no single failure, likely combination of failures or malfunction of the system will result in unwanted reverse thrust under any operating condition. Failure of structural elements need not be considered if the probability of this type of failure is extremely remote.

(2) Compliance with paragraph (b)(1) of this section must be shown by failure analysis, or testing, or both, for propeller systems that allow the propeller blades to move from the flight low-pitch position to a position that is substantially less than the normal flight, low-pitch position. The analysis may include or be supported by the analysis made to show compliance with §35.21 for the type certification of the propeller and associated installation components. Credit will be given for pertinent analysis and testing completed by the engine and propeller manufacturers.

[Doc. No. 26344, 58 FR 18971, Apr. 9, 1993, as amended by Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.934 Turbojet and turbofan engine thrust reverser systems tests.

Thrust reverser systems of turbojet or turbofan engines must meet the requirements of §33.97 of this chapter or it must be demonstrated by tests that engine operation and vibratory levels are not affected.

[Doc. No. 26344, 58 FR 18971, Apr. 9, 1993]

§ 23.937 Turbopropeller-drag limiting systems.

(a) Turbopropeller-powered airplane propeller-drag limiting systems must be designed so that no single failure or malfunction of any of the systems during normal or emergency operation results in propeller drag in excess of that for which the airplane was designed under the structural requirements of this part. Failure of structural elements of the drag limiting systems need not be considered if the probability of this kind of failure is extremely remote.

(b) As used in this section, drag limiting systems include manual or automatic devices that, when actuated after engine power loss, can move the propeller blades toward the feather position to reduce windmilling drag to a safe level.

[Amdt. 23–7, 34 FR 13093, Aug. 13, 1969, as amended by Amdt. 23–43, 58 FR 18971, Apr. 9, 1993]

§ 23.939 Powerplant operating characteristics.

(a) Turbine engine powerplant operating characteristics must be investigated in flight to determine that no adverse characteristics (such as stall, surge, or flameout) are present, to a hazardous degree, during normal and emergency operation within the range of operating limitations of the airplane and of the engine.

(b) Turbocharged reciprocating engine operating characteristics must be investigated in flight to assure that no adverse characteristics, as a result of an inadvertent overboost, surge, flooding, or vapor lock, are present during normal or emergency operation of the engine(s) throughout the range of operating limitations of both airplane and engine.

(c) For turbine engines, the air inlet system must not, as a result of airflow distortion during normal operation, cause vibration harmful to the engine.

[Amdt. 23–7, 34 FR 13093 Aug. 13, 1969, as amended by Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–42, 56 FR 354, Jan. 3, 1991]

§ 23.943 Negative acceleration.

No hazardous malfunction of an engine, an auxiliary power unit approved for use in flight, or any component or system associated with the powerplant or auxiliary power unit may occur when the airplane is operated at the negative accelerations within the flight envelopes prescribed in §23.333. This must be shown for the greatest value and duration of the acceleration expected in service.

[Amdt. 23–18, 42 FR 15041, Mar. 17, 1977, as amended by Amdt. 23–43, 58 FR 18971, Apr. 9, 1993]

Fuel System

§ 23.951 General.

(a) Each fuel system must be constructed and arranged to ensure fuel flow at a rate and pressure established for proper engine and auxiliary power unit functioning under each likely operating condition, including any maneuver for which certification is requested and during which the engine or auxiliary power unit is permitted to be in operation.

(b) Each fuel system must be arranged so that—

(1) No fuel pump can draw fuel from more than one tank at a time; or

(2) There are means to prevent introducing air into the system.

(c) Each fuel system for a turbine engine must be capable of sustained operation throughout its flow and pressure range with fuel initially saturated with water at 80 °F and having 0.75cc of free water per gallon added and cooled to the most critical condition for icing likely to be encountered in operation.

(d) Each fuel system for a turbine engine powered airplane must meet the applicable fuel venting requirements of part 34 of this chapter.

[Amdt. 23–15, 39 FR 35459, Oct. 1, 1974, as amended by Amdt. 23–40, 55 FR 32861, Aug. 10, 1990; Amdt. 23–43, 58 FR 18971, Apr. 9, 1993]

§ 23.953 Fuel system independence.

(a) Each fuel system for a multiengine airplane must be arranged so that, in at least one system configuration, the failure of any one component (other than a fuel tank) will not result in the loss of power of more than one engine or require immediate action by the pilot to prevent the loss of power of more than one engine.

(b) If a single fuel tank (or series of fuel tanks interconnected to function as a single fuel tank) is used on a multiengine airplane, the following must be provided:

(1) Independent tank outlets for each engine, each incorporating a shut-off valve at the tank. This shutoff valve may also serve as the fire wall shutoff valve required if the line between the valve and the engine compartment does not contain more than one quart of fuel (or any greater amount shown to be safe) that can escape into the engine compartment.

(2) At least two vents arranged to minimize the probability of both vents becoming obstructed simultaneously.

(3) Filler caps designed to minimize the probability of incorrect installation or inflight loss.

(4) A fuel system in which those parts of the system from each tank outlet to any engine are independent of each part of the system supplying fuel to any other engine.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13093 Aug. 13, 1969; Amdt. 23–43, 58 FR 18971, Apr. 9, 1993]

§ 23.954 Fuel system lightning protection.

The fuel system must be designed and arranged to prevent the ignition of fuel vapor within the system by—

(a) Direct lightning strikes to areas having a high probability of stroke attachment;

- (b) Swept lightning strokes on areas where swept strokes are highly probable; and
- (c) Corona or streamering at fuel vent outlets.

[Amdt. 23–7, 34 FR 13093, Aug. 13, 1969]

§ 23.955 Fuel flow.

(a) General. The ability of the fuel system to provide fuel at the rates specified in this section and at a pressure sufficient for proper engine operation must be shown in the attitude that is most critical with respect to fuel feed and quantity of unusable fuel. These conditions may be simulated in a suitable mockup. In addition—

- (1) The quantity of fuel in the tank may not exceed the amount established as the unusable fuel supply for that tank under §23.959(a) plus that quantity necessary to show compliance with this section.
 - (2) If there is a fuel flowmeter, it must be blocked during the flow test and the fuel must flow through the meter or its bypass.
 - (3) If there is a flowmeter without a bypass, it must not have any probable failure mode that would restrict fuel flow below the level required for this fuel demonstration.
 - (4) The fuel flow must include that flow necessary for vapor return flow, jet pump drive flow, and for all other purposes for which fuel is used.
- (b) Gravity systems. The fuel flow rate for gravity systems (main and reserve supply) must be 150 percent of the takeoff fuel consumption of the engine.
- (c) Pump systems. The fuel flow rate for each pump system (main and reserve supply) for each reciprocating engine must be 125 percent of the fuel flow required by the engine at the maximum takeoff power approved under this part.
- (1) This flow rate is required for each main pump and each emergency pump, and must be available when the pump is operating as it would during takeoff;
 - (2) For each hand-operated pump, this rate must occur at not more than 60 complete cycles (120 single strokes) per minute.
 - (3) The fuel pressure, with main and emergency pumps operating simultaneously, must not exceed the fuel inlet pressure limits of the engine unless it can be shown that no adverse effect occurs.
- (d) Auxiliary fuel systems and fuel transfer systems. Paragraphs (b), (c), and (f) of this section apply to each auxiliary and transfer system, except that—
- (1) The required fuel flow rate must be established upon the basis of maximum continuous power and engine rotational speed, instead of takeoff power and fuel consumption; and
 - (2) If there is a placard providing operating instructions, a lesser flow rate may be used for

transferring fuel from any auxiliary tank into a larger main tank. This lesser flow rate must be adequate to maintain engine maximum continuous power but the flow rate must not overflow the main tank at lower engine powers.

(e) Multiple fuel tanks. For reciprocating engines that are supplied with fuel from more than one tank, if engine power loss becomes apparent due to fuel depletion from the tank selected, it must be possible after switching to any full tank, in level flight, to obtain 75 percent maximum continuous power on that engine in not more than—

(1) 10 seconds for naturally aspirated single-engine airplanes;

(2) 20 seconds for turbocharged single-engine airplanes, provided that 75 percent maximum continuous naturally aspirated power is regained within 10 seconds; or

(3) 20 seconds for multiengine airplanes.

(f) Turbine engine fuel systems. Each turbine engine fuel system must provide at least 100 percent of the fuel flow required by the engine under each intended operation condition and maneuver. The conditions may be simulated in a suitable mockup. This flow must—

(1) Be shown with the airplane in the most adverse fuel feed condition (with respect to altitudes, attitudes, and other conditions) that is expected in operation; and

(2) For multiengine airplanes, notwithstanding the lower flow rate allowed by paragraph (d) of this section, be automatically uninterrupted with respect to any engine until all the fuel scheduled for use by that engine has been consumed. In addition—

(i) For the purposes of this section, “fuel scheduled for use by that engine” means all fuel in any tank intended for use by a specific engine.

(ii) The fuel system design must clearly indicate the engine for which fuel in any tank is scheduled.

(iii) Compliance with this paragraph must require no pilot action after completion of the engine starting phase of operations.

(3) For single-engine airplanes, require no pilot action after completion of the engine starting phase of operations unless means are provided that unmistakably alert the pilot to take any needed action at least five minutes prior to the needed action; such pilot action must not cause any change in engine operation; and such pilot action must not distract pilot attention from essential flight duties during any phase of operations for which the airplane is approved.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13093, Aug. 13, 1969; Amdt. 23–43, 58 FR 18971, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.957 Flow between interconnected tanks.

(a) It must be impossible, in a gravity feed system with interconnected tank outlets, for enough fuel to flow between the tanks to cause an overflow of fuel from any tank vent under the conditions in §23.959, except that full tanks must be used.

(b) If fuel can be pumped from one tank to another in flight, the fuel tank vents and the fuel transfer system must be designed so that no structural damage to any airplane component can occur because of overfilling of any tank.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18972, Apr. 9, 1993]

§ 23.959 Unusable fuel supply.

(a) The unusable fuel supply for each tank must be established as not less than that quantity at which the first evidence of malfunctioning occurs under the most adverse fuel feed condition occurring under each intended operation and flight maneuver involving that tank. Fuel system component failures need not be considered.

(b) The effect on the usable fuel quantity as a result of a failure of any pump shall be determined.

[Amdt. 23–7, 34 FR 13093, Aug. 13, 1969, as amended by Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.961 Fuel system hot weather operation.

Each fuel system must be free from vapor lock when using fuel at its critical temperature, with respect to vapor formation, when operating the airplane in all critical operating and environmental conditions for which approval is requested. For turbine fuel, the initial temperature must be 110 °F, –0°, +5 °F or the maximum outside air temperature for which approval is requested, whichever is more critical.

[Doc. No. 26344, 58 FR 18972, Apr. 9, 1993; 58 FR 27060, May 6, 1993]

§ 23.963 Fuel tanks: General.

(a) Each fuel tank must be able to withstand, without failure, the vibration, inertia, fluid, and structural loads that it may be subjected to in operation.

(b) Each flexible fuel tank liner must be shown to be suitable for the particular application.

(c) Each integral fuel tank must have adequate facilities for interior inspection and repair.

(d) The total usable capacity of the fuel tanks must be enough for at least one-half hour of operation at maximum continuous power.

(e) Each fuel quantity indicator must be adjusted, as specified in §23.1337(b), to account for the unusable fuel supply determined under §23.959(a).

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt 23–34, 52 FR 1832, Jan. 15, 1987; Amdt. 23–43, 58 FR 18972, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.965 Fuel tank tests.

(a) Each fuel tank must be able to withstand the following pressures without failure or leakage:

(1) For each conventional metal tank and nonmetallic tank with walls not supported by the airplane structure, a pressure of 3.5 p.s.i., or that pressure developed during maximum ultimate acceleration with a full tank, whichever is greater.

(2) For each integral tank, the pressure developed during the maximum limit acceleration of the airplane with a full tank, with simultaneous application of the critical limit structural loads.

(3) For each nonmetallic tank with walls supported by the airplane structure and constructed in an acceptable manner using acceptable basic tank material, and with actual or simulated support conditions, a pressure of 2 p.s.i. for the first tank of a specific design. The supporting structure must be designed for the critical loads occurring in the flight or landing strength conditions combined with the fuel pressure loads resulting from the corresponding accelerations.

(b) Each fuel tank with large, unsupported, or unstiffened flat surfaces, whose failure or deformation could cause fuel leakage, must be able to withstand the following test without leakage, failure, or excessive deformation of the tank walls:

(1) Each complete tank assembly and its support must be vibration tested while mounted to simulate the actual installation.

(2) Except as specified in paragraph (b)(4) of this section, the tank assembly must be vibrated for 25 hours at a total displacement of not less than $1/32$ of an inch (unless another displacement is substantiated) while $2/3$ filled with water or other suitable test fluid.

(3) The test frequency of vibration must be as follows:

(i) If no frequency of vibration resulting from any rpm within the normal operating range of engine or propeller speeds is critical, the test frequency of vibration is:

(A) The number of cycles per minute obtained by multiplying the maximum continuous propeller speed in rpm by 0.9 for propeller-driven airplanes, and

(B) For non-propeller driven airplanes the test frequency of vibration is 2,000 cycles per minute.

(ii) If only one frequency of vibration resulting from any rpm within the normal operating range of engine or propeller speeds is critical, that frequency of vibration must be the test frequency.

(iii) If more than one frequency of vibration resulting from any rpm within the normal operating range of engine or propeller speeds is critical, the most critical of these frequencies must be the test frequency.

(4) Under paragraph (b)(3) (ii) and (iii) of this section, the time of test must be adjusted to accomplish the same number of vibration cycles that would be accomplished in 25 hours at the frequency specified in paragraph (b)(3)(i) of this section.

(5) During the test, the tank assembly must be rocked at a rate of 16 to 20 complete cycles per minute, through an angle of 15° on either side of the horizontal (30° total), about an axis parallel to

the axis of the fuselage, for 25 hours.

(c) Each integral tank using methods of construction and sealing not previously proven to be adequate by test data or service experience must be able to withstand the vibration test specified in paragraphs (b)(1) through (4) of this section.

(d) Each tank with a nonmetallic liner must be subjected to the sloshing test outlined in paragraph (b)(5) of this section, with the fuel at room temperature. In addition, a specimen liner of the same basic construction as that to be used in the airplane must, when installed in a suitable test tank, withstand the sloshing test with fuel at a temperature of 110 °F.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18972, Apr. 9, 1993; Amdt. 23–43, 61 FR 253, Jan. 4, 1996; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.967 Fuel tank installation.

(a) Each fuel tank must be supported so that tank loads are not concentrated. In addition—

(1) There must be pads, if necessary, to prevent chafing between each tank and its supports;

(2) Padding must be nonabsorbent or treated to prevent the absorption of fuel;

(3) If a flexible tank liner is used, it must be supported so that it is not required to withstand fluid loads;

(4) Interior surfaces adjacent to the liner must be smooth and free from projections that could cause wear, unless—

(i) Provisions are made for protection of the liner at those points; or

(ii) The construction of the liner itself provides such protection; and

(5) A positive pressure must be maintained within the vapor space of each bladder cell under any condition of operation, except for a particular condition for which it is shown that a zero or negative pressure will not cause the bladder cell to collapse; and

(6) Syphoning of fuel (other than minor spillage) or collapse of bladder fuel cells may not result from improper securing or loss of the fuel filler cap.

(b) Each tank compartment must be ventilated and drained to prevent the accumulation of flammable fluids or vapors. Each compartment adjacent to a tank that is an integral part of the airplane structure must also be ventilated and drained.

(c) No fuel tank may be on the engine side of the firewall. There must be at least one-half inch of clearance between the fuel tank and the firewall. No part of the engine nacelle skin that lies immediately behind a major air opening from the engine compartment may act as the wall of an integral tank.

(d) Each fuel tank must be isolated from personnel compartments by a fume-proof and fuel-proof

enclosure that is vented and drained to the exterior of the airplane. The required enclosure must sustain any personnel compartment pressurization loads without permanent deformation or failure under the conditions of §§23.365 and 23.843 of this part. A bladder-type fuel cell, if used, must have a retaining shell at least equivalent to a metal fuel tank in structural integrity.

(e) Fuel tanks must be designed, located, and installed so as to retain fuel:

(1) When subjected to the inertia loads resulting from the ultimate static load factors prescribed in §23.561(b)(2) of this part; and

(2) Under conditions likely to occur when the airplane lands on a paved runway at a normal landing speed under each of the following conditions:

(i) The airplane in a normal landing attitude and its landing gear retracted.

(ii) The most critical landing gear leg collapsed and the other landing gear legs extended.

In showing compliance with paragraph (e)(2) of this section, the tearing away of an engine mount must be considered unless all the engines are installed above the wing or on the tail or fuselage of the airplane.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13903, Aug. 13, 1969; Amdt. 23-14, 38 FR 31823, Nov. 19, 1973; Amdt. 23-18, 42 FR 15041, Mar. 17, 1977; Amdt. 23-26, 45 FR 60171, Sept. 11, 1980; Amdt. 23-36, 53 FR 30815, Aug. 15, 1988; Amdt. 23-43, 58 FR 18972, Apr. 9, 1993]

§ 23.969 Fuel tank expansion space.

Each fuel tank must have an expansion space of not less than two percent of the tank capacity, unless the tank vent discharges clear of the airplane (in which case no expansion space is required). It must be impossible to fill the expansion space inadvertently with the airplane in the normal ground attitude.

§ 23.971 Fuel tank sump.

(a) Each fuel tank must have a drainable sump with an effective capacity, in the normal ground and flight attitudes, of 0.25 percent of the tank capacity, or 1/16 gallon, whichever is greater.

(b) Each fuel tank must allow drainage of any hazardous quantity of water from any part of the tank to its sump with the airplane in the normal ground attitude.

(c) Each reciprocating engine fuel system must have a sediment bowl or chamber that is accessible for drainage; has a capacity of 1 ounce for every 20 gallons of fuel tank capacity; and each fuel tank outlet is located so that, in the normal flight attitude, water will drain from all parts of the tank except the sump to the sediment bowl or chamber.

(d) Each sump, sediment bowl, and sediment chamber drain required by paragraphs (a), (b), and (c) of this section must comply with the drain provisions of §23.999(b)(1) and (b)(2).

[Doc. No. 26344, 58 FR 18972, Apr. 9, 1993; 58 FR 27060, May 6, 1993]

§ 23.973 Fuel tank filler connection.

- (a) Each fuel tank filler connection must be marked as prescribed in §23.1557(c).
- (b) Spilled fuel must be prevented from entering the fuel tank compartment or any part of the airplane other than the tank itself.
- (c) Each filler cap must provide a fuel-tight seal for the main filler opening. However, there may be small openings in the fuel tank cap for venting purposes or for the purpose of allowing passage of a fuel gauge through the cap provided such openings comply with the requirements of §23.975(a).
- (d) Each fuel filling point, except pressure fueling connection points, must have a provision for electrically bonding the airplane to ground fueling equipment.
- (e) For airplanes with engines requiring gasoline as the only permissible fuel, the inside diameter of the fuel filler opening must be no larger than 2.36 inches.
- (f) For airplanes with turbine engines, the inside diameter of the fuel filler opening must be no smaller than 2.95 inches.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–43, 58 FR 18972, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.975 Fuel tank vents and carburetor vapor vents.

- (a) Each fuel tank must be vented from the top part of the expansion space. In addition—
 - (1) Each vent outlet must be located and constructed in a manner that minimizes the possibility of its being obstructed by ice or other foreign matter;
 - (2) Each vent must be constructed to prevent siphoning of fuel during normal operation;
 - (3) The venting capacity must allow the rapid relief of excessive differences of pressure between the interior and exterior of the tank;
 - (4) Airspaces of tanks with interconnected outlets must be interconnected;
 - (5) There may be no point in any vent line where moisture can accumulate with the airplane in either the ground or level flight attitudes, unless drainage is provided. Any drain valve installed must be accessible for drainage;
 - (6) No vent may terminate at a point where the discharge of fuel from the vent outlet will constitute a fire hazard or from which fumes may enter personnel compartments; and
 - (7) Vents must be arranged to prevent the loss of fuel, except fuel discharged because of thermal expansion, when the airplane is parked in any direction on a ramp having a one-percent slope.

(b) Each carburetor with vapor elimination connections and each fuel injection engine employing vapor return provisions must have a separate vent line to lead vapors back to the top of one of the fuel tanks. If there is more than one tank and it is necessary to use these tanks in a definite sequence for any reason, the vapor vent line must lead back to the fuel tank to be used first, unless the relative capacities of the tanks are such that return to another tank is preferable.

(c) For acrobatic category airplanes, excessive loss of fuel during acrobatic maneuvers, including short periods of inverted flight, must be prevented. It must be impossible for fuel to siphon from the vent when normal flight has been resumed after any acrobatic maneuver for which certification is requested.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993; Amdt. 23–51, 61 FR 5136, Feb. 9, 1996]

§ 23.977 Fuel tank outlet.

(a) There must be a fuel strainer for the fuel tank outlet or for the booster pump. This strainer must—

(1) For reciprocating engine powered airplanes, have 8 to 16 meshes per inch; and

(2) For turbine engine powered airplanes, prevent the passage of any object that could restrict fuel flow or damage any fuel system component.

(b) The clear area of each fuel tank outlet strainer must be at least five times the area of the outlet line.

(c) The diameter of each strainer must be at least that of the fuel tank outlet.

(d) Each strainer must be accessible for inspection and cleaning.

[Amdt. 23–17, 41 FR 55465, Dec. 20, 1976, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.979 Pressure fueling systems.

For pressure fueling systems, the following apply:

(a) Each pressure fueling system fuel manifold connection must have means to prevent the escape of hazardous quantities of fuel from the system if the fuel entry valve fails.

(b) An automatic shutoff means must be provided to prevent the quantity of fuel in each tank from exceeding the maximum quantity approved for that tank. This means must—

(1) Allow checking for proper shutoff operation before each fueling of the tank; and

(2) For commuter category airplanes, indicate at each fueling station, a failure of the shutoff means to stop the fuel flow at the maximum quantity approved for that tank.

(c) A means must be provided to prevent damage to the fuel system in the event of failure of the automatic shutoff means prescribed in paragraph (b) of this section.

(d) All parts of the fuel system up to the tank which are subjected to fueling pressures must have a proof pressure of 1.33 times, and an ultimate pressure of at least 2.0 times, the surge pressure likely to occur during fueling.

[Amdt. 23–14, 38 FR 31823, Nov. 19, 1973, as amended by Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

Fuel System Components

§ 23.991 Fuel pumps.

(a) Main pumps. For main pumps, the following apply:

(1) For reciprocating engine installations having fuel pumps to supply fuel to the engine, at least one pump for each engine must be directly driven by the engine and must meet §23.955. This pump is a main pump.

(2) For turbine engine installations, each fuel pump required for proper engine operation, or required to meet the fuel system requirements of this subpart (other than those in paragraph (b) of this section), is a main pump. In addition—

(i) There must be at least one main pump for each turbine engine;

(ii) The power supply for the main pump for each engine must be independent of the power supply for each main pump for any other engine; and

(iii) For each main pump, provision must be made to allow the bypass of each positive displacement fuel pump other than a fuel injection pump approved as part of the engine.

(b) Emergency pumps. There must be an emergency pump immediately available to supply fuel to the engine if any main pump (other than a fuel injection pump approved as part of an engine) fails. The power supply for each emergency pump must be independent of the power supply for each corresponding main pump.

(c) Warning means. If both the main pump and emergency pump operate continuously, there must be a means to indicate to the appropriate flight crewmembers a malfunction of either pump.

(d) Operation of any fuel pump may not affect engine operation so as to create a hazard, regardless of the engine power or thrust setting or the functional status of any other fuel pump.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13093, Aug. 13, 1969; Amdt. 23–26, 45 FR 60171, Sept. 11, 1980; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.993 Fuel system lines and fittings.

(a) Each fuel line must be installed and supported to prevent excessive vibration and to withstand

loads due to fuel pressure and accelerated flight conditions.

- (b) Each fuel line connected to components of the airplane between which relative motion could exist must have provisions for flexibility.
- (c) Each flexible connection in fuel lines that may be under pressure and subjected to axial loading must use flexible hose assemblies.
- (d) Each flexible hose must be shown to be suitable for the particular application.
- (e) No flexible hose that might be adversely affected by exposure to high temperatures may be used where excessive temperatures will exist during operation or after engine shutdown.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.994 Fuel system components.

Fuel system components in an engine nacelle or in the fuselage must be protected from damage which could result in spillage of enough fuel to constitute a fire hazard as a result of a wheels-up landing on a paved runway.

[Amdt. 23–29, 49 FR 6847, Feb. 23, 1984]

§ 23.995 Fuel valves and controls.

- (a) There must be a means to allow appropriate flight crew members to rapidly shut off, in flight, the fuel to each engine individually.
- (b) No shutoff valve may be on the engine side of any firewall. In addition, there must be means to—
 - (1) Guard against inadvertent operation of each shutoff valve; and
 - (2) Allow appropriate flight crew members to reopen each valve rapidly after it has been closed.
- (c) Each valve and fuel system control must be supported so that loads resulting from its operation or from accelerated flight conditions are not transmitted to the lines connected to the valve.
- (d) Each valve and fuel system control must be installed so that gravity and vibration will not affect the selected position.
- (e) Each fuel valve handle and its connections to the valve mechanism must have design features that minimize the possibility of incorrect installation.
- (f) Each check valve must be constructed, or otherwise incorporate provisions, to preclude incorrect assembly or connection of the valve.
- (g) Fuel tank selector valves must—

- (1) Require a separate and distinct action to place the selector in the “OFF” position; and
- (2) Have the tank selector positions located in such a manner that it is impossible for the selector to pass through the “OFF” position when changing from one tank to another.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–17, 41 FR 55465, Dec. 20, 1976; Amdt. 23–18, 42 FR 15041, Mar. 17, 1977; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984]

§ 23.997 Fuel strainer or filter.

There must be a fuel strainer or filter between the fuel tank outlet and the inlet of either the fuel metering device or an engine driven positive displacement pump, whichever is nearer the fuel tank outlet. This fuel strainer or filter must—

- (a) Be accessible for draining and cleaning and must incorporate a screen or element which is easily removable;
- (b) Have a sediment trap and drain except that it need not have a drain if the strainer or filter is easily removable for drain purposes;
- (c) Be mounted so that its weight is not supported by the connecting lines or by the inlet or outlet connections of the strainer or filter itself, unless adequate strength margins under all loading conditions are provided in the lines and connections; and
- (d) Have the capacity (with respect to operating limitations established for the engine) to ensure that engine fuel system functioning is not impaired, with the fuel contaminated to a degree (with respect to particle size and density) that is greater than that established for the engine during its type certification.
- (e) In addition, for commuter category airplanes, unless means are provided in the fuel system to prevent the accumulation of ice on the filter, a means must be provided to automatically maintain the fuel flow if ice clogging of the filter occurs.

[Amdt. 23–15, 39 FR 35459, Oct. 1, 1974, as amended by Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–34, 52 FR 1832, Jan. 15, 1987; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.999 Fuel system drains.

- (a) There must be at least one drain to allow safe drainage of the entire fuel system with the airplane in its normal ground attitude.
- (b) Each drain required by paragraph (a) of this section and §23.971 must—
 - (1) Discharge clear of all parts of the airplane;
 - (2) Have a drain valve—
 - (i) That has manual or automatic means for positive locking in the closed position;

- (ii) That is readily accessible;
- (iii) That can be easily opened and closed;
- (iv) That allows the fuel to be caught for examination;
- (v) That can be observed for proper closing; and
- (vi) That is either located or protected to prevent fuel spillage in the event of a landing with landing gear retracted.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55465, Dec. 20, 1976; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.1001 Fuel jettisoning system.

(a) If the design landing weight is less than that permitted under the requirements of §23.473(b), the airplane must have a fuel jettisoning system installed that is able to jettison enough fuel to bring the maximum weight down to the design landing weight. The average rate of fuel jettisoning must be at least 1 percent of the maximum weight per minute, except that the time required to jettison the fuel need not be less than 10 minutes.

(b) Fuel jettisoning must be demonstrated at maximum weight with flaps and landing gear up and in—

(1) A power-off glide at $1.4 V_{S1}$;

(2) A climb, at the speed at which the one-engine-inoperative enroute climb data have been established in accordance with §23.69(b), with the critical engine inoperative and the remaining engines at maximum continuous power; and

(3) Level flight at $1.4 V_{S1}$, if the results of the tests in the conditions specified in paragraphs (b)(1) and (2) of this section show that this condition could be critical.

(c) During the flight tests prescribed in paragraph (b) of this section, it must be shown that—

(1) The fuel jettisoning system and its operation are free from fire hazard;

(2) The fuel discharges clear of any part of the airplane;

(3) Fuel or fumes do not enter any parts of the airplane; and

(4) The jettisoning operation does not adversely affect the controllability of the airplane.

(d) For reciprocating engine powered airplanes, the jettisoning system must be designed so that it is not possible to jettison the fuel in the tanks used for takeoff and landing below the level allowing 45 minutes flight at 75 percent maximum continuous power. However, if there is an auxiliary control independent of the main jettisoning control, the system may be designed to jettison all the fuel.

- (e) For turbine engine powered airplanes, the jettisoning system must be designed so that it is not possible to jettison fuel in the tanks used for takeoff and landing below the level allowing climb from sea level to 10,000 feet and thereafter allowing 45 minutes cruise at a speed for maximum range.
- (f) The fuel jettisoning valve must be designed to allow flight crewmembers to close the valve during any part of the jettisoning operation.
- (g) Unless it is shown that using any means (including flaps, slots, and slats) for changing the airflow across or around the wings does not adversely affect fuel jettisoning, there must be a placard, adjacent to the jettisoning control, to warn flight crewmembers against jettisoning fuel while the means that change the airflow are being used.
- (h) The fuel jettisoning system must be designed so that any reasonably probable single malfunction in the system will not result in a hazardous condition due to unsymmetrical jettisoning of, or inability to jettison, fuel.

[Amdt. 23–7, 34 FR 13094, Aug. 13, 1969, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

Oil System

§ 23.1011 General.

- (a) For oil systems and components that have been approved under the engine airworthiness requirements and where those requirements are equal to or more severe than the corresponding requirements of subpart E of this part, that approval need not be duplicated. Where the requirements of subpart E of this part are more severe, substantiation must be shown to the requirements of subpart E of this part.
- (b) Each engine must have an independent oil system that can supply it with an appropriate quantity of oil at a temperature not above that safe for continuous operation.
- (c) The usable oil tank capacity may not be less than the product of the endurance of the airplane under critical operating conditions and the maximum oil consumption of the engine under the same conditions, plus a suitable margin to ensure adequate circulation and cooling.
- (d) For an oil system without an oil transfer system, only the usable oil tank capacity may be considered. The amount of oil in the engine oil lines, the oil radiator, and the feathering reserve, may not be considered.
- (e) If an oil transfer system is used, and the transfer pump can pump some of the oil in the transfer lines into the main engine oil tanks, the amount of oil in these lines that can be pumped by the transfer pump may be included in the oil capacity.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.1013 Oil tanks.

(a) Installation. Each oil tank must be installed to—

(1) Meet the requirements of §23.967 (a) and (b); and

(2) Withstand any vibration, inertia, and fluid loads expected in operation.

(b) Expansion space. Oil tank expansion space must be provided so that—

(1) Each oil tank used with a reciprocating engine has an expansion space of not less than the greater of 10 percent of the tank capacity or 0.5 gallon, and each oil tank used with a turbine engine has an expansion space of not less than 10 percent of the tank capacity; and

(2) It is impossible to fill the expansion space inadvertently with the airplane in the normal ground attitude.

(c) Filler connection. Each oil tank filler connection must be marked as specified in §23.1557(c). Each recessed oil tank filler connection of an oil tank used with a turbine engine, that can retain any appreciable quantity of oil, must have provisions for fitting a drain.

(d) Vent. Oil tanks must be vented as follows:

(1) Each oil tank must be vented to the engine from the top part of the expansion space so that the vent connection is not covered by oil under any normal flight condition.

(2) Oil tank vents must be arranged so that condensed water vapor that might freeze and obstruct the line cannot accumulate at any point.

(3) For acrobatic category airplanes, there must be means to prevent hazardous loss of oil during acrobatic maneuvers, including short periods of inverted flight.

(e) Outlet. No oil tank outlet may be enclosed by any screen or guard that would reduce the flow of oil below a safe value at any operating temperature. No oil tank outlet diameter may be less than the diameter of the engine oil pump inlet. Each oil tank used with a turbine engine must have means to prevent entrance into the tank itself, or into the tank outlet, of any object that might obstruct the flow of oil through the system. There must be a shutoff valve at the outlet of each oil tank used with a turbine engine, unless the external portion of the oil system (including oil tank supports) is fireproof.

(f) Flexible liners. Each flexible oil tank liner must be of an acceptable kind.

(g) Each oil tank filler cap of an oil tank that is used with an engine must provide an oiltight seal.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–15, 39 FR 35459 Oct. 1, 1974; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1015 Oil tank tests.

Each oil tank must be tested under §23.965, except that—

- (a) The applied pressure must be five p.s.i. for the tank construction instead of the pressures specified in §23.965(a);
- (b) For a tank with a nonmetallic liner the test fluid must be oil rather than fuel as specified in §23.965(d), and the slosh test on a specimen liner must be conducted with the oil at 250 °F.; and
- (c) For pressurized tanks used with a turbine engine, the test pressure may not be less than 5 p.s.i. plus the maximum operating pressure of the tank.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–15, 39 FR 35460, Oct. 1, 1974]

§ 23.1017 Oil lines and fittings.

- (a) Oil lines. Oil lines must meet §23.993 and must accommodate a flow of oil at a rate and pressure adequate for proper engine functioning under any normal operating condition.
- (b) Breather lines. Breather lines must be arranged so that—
- (1) Condensed water vapor or oil that might freeze and obstruct the line cannot accumulate at any point;
 - (2) The breather discharge will not constitute a fire hazard if foaming occurs, or cause emitted oil to strike the pilot's windshield;
 - (3) The breather does not discharge into the engine air induction system; and
 - (4) For acrobatic category airplanes, there is no excessive loss of oil from the breather during acrobatic maneuvers, including short periods of inverted flight.
 - (5) The breather outlet is protected against blockage by ice or foreign matter.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13094, Aug. 13, 1969; Amdt. 23–14, 38 FR 31823, Nov. 19, 1973]

§ 23.1019 Oil strainer or filter.

- (a) Each turbine engine installation must incorporate an oil strainer or filter through which all of the engine oil flows and which meets the following requirements:
- (1) Each oil strainer or filter that has a bypass, must be constructed and installed so that oil will flow at the normal rate through the rest of the system with the strainer or filter completely blocked.
 - (2) The oil strainer or filter must have the capacity (with respect to operating limitations established for the engine) to ensure that engine oil system functioning is not impaired when the oil is contaminated to a degree (with respect to particle size and density) that is greater than that established for the engine for its type certification.
 - (3) The oil strainer or filter, unless it is installed at an oil tank outlet, must incorporate a means to

indicate contamination before it reaches the capacity established in accordance with paragraph (a)(2) of this section.

(4) The bypass of a strainer or filter must be constructed and installed so that the release of collected contaminants is minimized by appropriate location of the bypass to ensure that collected contaminants are not in the bypass flow path.

(5) An oil strainer or filter that has no bypass, except one that is installed at an oil tank outlet, must have a means to connect it to the warning system required in §23.1305(c)(9).

(b) Each oil strainer or filter in a powerplant installation using reciprocating engines must be constructed and installed so that oil will flow at the normal rate through the rest of the system with the strainer or filter element completely blocked.

[Amdt. 23–15, 39 FR 35460, Oct. 1, 1974, as amended by Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.1021 Oil system drains.

A drain (or drains) must be provided to allow safe drainage of the oil system. Each drain must—

- (a) Be accessible;
- (b) Have drain valves, or other closures, employing manual or automatic shut-off means for positive locking in the closed position; and
- (c) Be located or protected to prevent inadvertent operation.

[Amdt. 23–29, 49 FR 6847, Feb. 23, 1984, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.1023 Oil radiators.

Each oil radiator and its supporting structures must be able to withstand the vibration, inertia, and oil pressure loads to which it would be subjected in operation.

§ 23.1027 Propeller feathering system.

- (a) If the propeller feathering system uses engine oil and that oil supply can become depleted due to failure of any part of the oil system, a means must be incorporated to reserve enough oil to operate the feathering system.
- (b) The amount of reserved oil must be enough to accomplish feathering and must be available only to the feathering pump.
- (c) The ability of the system to accomplish feathering with the reserved oil must be shown.
- (d) Provision must be made to prevent sludge or other foreign matter from affecting the safe operation of the propeller feathering system.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

Cooling

§ 23.1041 General.

The powerplant and auxiliary power unit cooling provisions must maintain the temperatures of powerplant components and engine fluids, and auxiliary power unit components and fluids within the limits established for those components and fluids under the most adverse ground, water, and flight operations to the maximum altitude and maximum ambient atmospheric temperature conditions for which approval is requested, and after normal engine and auxiliary power unit shutdown.

[Doc. No. 26344, 58 FR 18973, Apr. 9, 1993, as amended by Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1043 Cooling tests.

(a) General. Compliance with §23.1041 must be shown on the basis of tests, for which the following apply:

- (1) If the tests are conducted under ambient atmospheric temperature conditions deviating from the maximum for which approval is requested, the recorded powerplant temperatures must be corrected under paragraphs (c) and (d) of this section, unless a more rational correction method is applicable.
- (2) No corrected temperature determined under paragraph (a)(1) of this section may exceed established limits.
- (3) The fuel used during the cooling tests must be of the minimum grade approved for the engine.
- (4) For turbocharged engines, each turbocharger must be operated through that part of the climb profile for which operation with the turbocharger is requested.
- (5) For a reciprocating engine, the mixture settings must be the leanest recommended for climb.

(b) Maximum ambient atmospheric temperature. A maximum ambient atmospheric temperature corresponding to sea level conditions of at least 100 degrees F must be established. The assumed temperature lapse rate is 3.6 degrees F per thousand feet of altitude above sea level until a temperature of –69.7 degrees F is reached, above which altitude the temperature is considered constant at –69.7 degrees F. However, for winterization installations, the applicant may select a maximum ambient atmospheric temperature corresponding to sea level conditions of less than 100 degrees F.

(c) Correction factor (except cylinder barrels). Temperatures of engine fluids and powerplant components (except cylinder barrels) for which temperature limits are established, must be corrected by adding to them the difference between the maximum ambient atmospheric temperature for the relevant altitude for which approval has been requested and the temperature of the ambient air at the time of the first occurrence of the maximum fluid or component temperature recorded

during the cooling test.

(d) Correction factor for cylinder barrel temperatures. Cylinder barrel temperatures must be corrected by adding to them 0.7 times the difference between the maximum ambient atmospheric temperature for the relevant altitude for which approval has been requested and the temperature of the ambient air at the time of the first occurrence of the maximum cylinder barrel temperature recorded during the cooling test.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13094, Aug. 13, 1969; Amdt. 23–21, 43 FR 2319, Jan. 16, 1978; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1045 Cooling test procedures for turbine engine powered airplanes.

(a) Compliance with §23.1041 must be shown for all phases of operation. The airplane must be flown in the configurations, at the speeds, and following the procedures recommended in the Airplane Flight Manual for the relevant stage of flight, that correspond to the applicable performance requirements that are critical to cooling.

(b) Temperatures must be stabilized under the conditions from which entry is made into each stage of flight being investigated, unless the entry condition normally is not one during which component and engine fluid temperatures would stabilize (in which case, operation through the full entry condition must be conducted before entry into the stage of flight being investigated in order to allow temperatures to reach their natural levels at the time of entry). The takeoff cooling test must be preceded by a period during which the powerplant component and engine fluid temperatures are stabilized with the engines at ground idle.

(c) Cooling tests for each stage of flight must be continued until—

- (1) The component and engine fluid temperatures stabilize;
- (2) The stage of flight is completed; or
- (3) An operating limitation is reached.

[Amdt. 23–7, 34 FR 13094, Aug. 13, 1969, as amended by Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1047 Cooling test procedures for reciprocating engine powered airplanes.

Compliance with §23.1041 must be shown for the climb (or, for multiengine airplanes with negative one-engine-inoperative rates of climb, the descent) stage of flight. The airplane must be flown in the configurations, at the speeds and following the procedures recommended in the Airplane Flight Manual, that correspond to the applicable performance requirements that are critical to cooling.

[Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

Liquid Cooling

§ 23.1061 Installation.

(a) General. Each liquid-cooled engine must have an independent cooling system (including coolant tank) installed so that—

(1) Each coolant tank is supported so that tank loads are distributed over a large part of the tank surface;

(2) There are pads or other isolation means between the tank and its supports to prevent chafing.

(3) Pads or any other isolation means that is used must be nonabsorbent or must be treated to prevent absorption of flammable fluids; and

(4) No air or vapor can be trapped in any part of the system, except the coolant tank expansion space, during filling or during operation.

(b) Coolant tank. The tank capacity must be at least one gallon, plus 10 percent of the cooling system capacity. In addition—

(1) Each coolant tank must be able to withstand the vibration, inertia, and fluid loads to which it may be subjected in operation;

(2) Each coolant tank must have an expansion space of at least 10 percent of the total cooling system capacity; and

(3) It must be impossible to fill the expansion space inadvertently with the airplane in the normal ground attitude.

(c) Filler connection. Each coolant tank filler connection must be marked as specified in §23.1557(c). In addition—

(1) Spilled coolant must be prevented from entering the coolant tank compartment or any part of the airplane other than the tank itself; and

(2) Each recessed coolant filler connection must have a drain that discharges clear of the entire airplane.

(d) Lines and fittings. Each coolant system line and fitting must meet the requirements of §23.993, except that the inside diameter of the engine coolant inlet and outlet lines may not be less than the diameter of the corresponding engine inlet and outlet connections.

(e) Radiators. Each coolant radiator must be able to withstand any vibration, inertia, and coolant pressure load to which it may normally be subjected. In addition—

(1) Each radiator must be supported to allow expansion due to operating temperatures and prevent the transmittal of harmful vibration to the radiator; and

(2) If flammable coolant is used, the air intake duct to the coolant radiator must be located so that (in case of fire) flames from the nacelle cannot strike the radiator.

(f) Drains. There must be an accessible drain that—

- (1) Drains the entire cooling system (including the coolant tank, radiator, and the engine) when the airplane is in the normal ground altitude;
- (2) Discharges clear of the entire airplane; and
- (3) Has means to positively lock it closed.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18973, Apr. 9, 1993]

§ 23.1063 Coolant tank tests.

Each coolant tank must be tested under §23.965, except that—

- (a) The test required by §23.965(a)(1) must be replaced with a similar test using the sum of the pressure developed during the maximum ultimate acceleration with a full tank or a pressure of 3.5 pounds per square inch, whichever is greater, plus the maximum working pressure of the system; and
- (b) For a tank with a nonmetallic liner the test fluid must be coolant rather than fuel as specified in §23.965(d), and the slosh test on a specimen liner must be conducted with the coolant at operating temperature.

Induction System

§ 23.1091 Air induction system.

- (a) The air induction system for each engine and auxiliary power unit and their accessories must supply the air required by that engine and auxiliary power unit and their accessories under the operating conditions for which certification is requested.
- (b) Each reciprocating engine installation must have at least two separate air intake sources and must meet the following:
 - (1) Primary air intakes may open within the cowling if that part of the cowling is isolated from the engine accessory section by a fire-resistant diaphragm or if there are means to prevent the emergence of backfire flames.
 - (2) Each alternate air intake must be located in a sheltered position and may not open within the cowling if the emergence of backfire flames will result in a hazard.
 - (3) The supplying of air to the engine through the alternate air intake system may not result in a loss of excessive power in addition to the power loss due to the rise in air temperature.
 - (4) Each automatic alternate air door must have an override means accessible to the flight crew.
 - (5) Each automatic alternate air door must have a means to indicate to the flight crew when it is not closed.

(c) For turbine engine powered airplanes—

(1) There must be means to prevent hazardous quantities of fuel leakage or overflow from drains, vents, or other components of flammable fluid systems from entering the engine intake system; and

(2) The airplane must be designed to prevent water or slush on the runway, taxiway, or other airport operating surfaces from being directed into the engine or auxiliary power unit air intake ducts in hazardous quantities. The air intake ducts must be located or protected so as to minimize the hazard of ingestion of foreign matter during takeoff, landing, and taxiing.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13095, Aug. 13, 1969; Amdt. 23–43, 58 FR 18973, Apr. 9, 1993; 58 FR 27060, May 6, 1993; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1093 Induction system icing protection.

(a) Reciprocating engines. Each reciprocating engine air induction system must have means to prevent and eliminate icing. Unless this is done by other means, it must be shown that, in air free of visible moisture at a temperature of 30 °F—

(1) Each airplane with sea level engines using conventional venturi carburetors has a preheater that can provide a heat rise of 90 °F. with the engines at 75 percent of maximum continuous power;

(2) Each airplane with altitude engines using conventional venturi carburetors has a preheater that can provide a heat rise of 120 °F. with the engines at 75 percent of maximum continuous power;

(3) Each airplane with altitude engines using fuel metering device tending to prevent icing has a preheater that, with the engines at 60 percent of maximum continuous power, can provide a heat rise of—

(i) 100 °F.; or

(ii) 40 °F., if a fluid deicing system meeting the requirements of §§23.1095 through 23.1099 is installed;

(4) Each airplane with sea level engine(s) using fuel metering device tending to prevent icing has a sheltered alternate source of air with a preheat of not less than 60 °F with the engines at 75 percent of maximum continuous power;

(5) Each airplane with sea level or altitude engine(s) using fuel injection systems having metering components on which impact ice may accumulate has a preheater capable of providing a heat rise of 75 °F when the engine is operating at 75 percent of its maximum continuous power; and

(6) Each airplane with sea level or altitude engine(s) using fuel injection systems not having fuel metering components projecting into the airstream on which ice may form, and introducing fuel into the air induction system downstream of any components or other obstruction on which ice produced by fuel evaporation may form, has a sheltered alternate source of air with a preheat of not less than 60 °F with the engines at 75 percent of its maximum continuous power.

(b) Turbine engines. (1) Each turbine engine and its air inlet system must operate throughout the flight power range of the engine (including idling), without the accumulation of ice on engine or inlet system components that would adversely affect engine operation or cause a serious loss of power or thrust—

(i) Under the icing conditions specified in appendix C of part 25 of this chapter; and

(ii) In snow, both falling and blowing, within the limitations established for the airplane for such operation.

(2) Each turbine engine must idle for 30 minutes on the ground, with the air bleed available for engine icing protection at its critical condition, without adverse effect, in an atmosphere that is at a temperature between 15° and 30 °F (between -9° and -1 °C) and has a liquid water content not less than 0.3 grams per cubic meter in the form of drops having a mean effective diameter not less than 20 microns, followed by momentary operation at takeoff power or thrust. During the 30 minutes of idle operation, the engine may be run up periodically to a moderate power or thrust setting in a manner acceptable to the Administrator.

(c) Reciprocating engines with Superchargers. For airplanes with reciprocating engines having superchargers to pressurize the air before it enters the fuel metering device, the heat rise in the air caused by that supercharging at any altitude may be utilized in determining compliance with paragraph (a) of this section if the heat rise utilized is that which will be available, automatically, for the applicable altitudes and operating condition because of supercharging.

[Amdt. 23-7, 34 FR 13095, Aug. 13, 1969, as amended by Amdt. 23-15, 39 FR 35460, Oct. 1, 1974; Amdt. 23-17, 41 FR 55465, Dec. 20, 1976; Amdt. 23-18, 42 FR 15041, Mar. 17, 1977; Amdt. 23-29, 49 FR 6847, Feb. 23, 1984; Amdt. 23-43, 58 FR 18973, Apr. 9, 1993; Amdt. 23-51, 61 FR 5137, Feb. 9, 1996]

§ 23.1095 Carburetor deicing fluid flow rate.

(a) If a carburetor deicing fluid system is used, it must be able to simultaneously supply each engine with a rate of fluid flow, expressed in pounds per hour, of not less than 2.5 times the square root of the maximum continuous power of the engine.

(b) The fluid must be introduced into the air induction system—

(1) Close to, and upstream of, the carburetor; and

(2) So that it is equally distributed over the entire cross section of the induction system air passages.

§ 23.1097 Carburetor deicing fluid system capacity.

(a) The capacity of each carburetor deicing fluid system—

(1) May not be less than the greater of—

(i) That required to provide fluid at the rate specified in §23.1095 for a time equal to three percent of the maximum endurance of the airplane; or

(ii) 20 minutes at that flow rate; and

(2) Need not exceed that required for two hours of operation.

(b) If the available preheat exceeds 50 °F. but is less than 100 °F., the capacity of the system may be decreased in proportion to the heat rise available in excess of 50 °F.

§ 23.1099 Carburetor deicing fluid system detail design.

Each carburetor deicing fluid system must meet the applicable requirements for the design of a fuel system, except as specified in §§23.1095 and 23.1097.

§ 23.1101 Induction air preheater design.

Each exhaust-heated, induction air preheater must be designed and constructed to—

(a) Ensure ventilation of the preheater when the induction air preheater is not being used during engine operation;

(b) Allow inspection of the exhaust manifold parts that it surrounds; and

(c) Allow inspection of critical parts of the preheater itself.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18974, Apr. 9, 1993]

§ 23.1103 Induction system ducts.

(a) Each induction system duct must have a drain to prevent the accumulation of fuel or moisture in the normal ground and flight attitudes. No drain may discharge where it will cause a fire hazard.

(b) Each duct connected to components between which relative motion could exist must have means for flexibility.

(c) Each flexible induction system duct must be capable of withstanding the effects of temperature extremes, fuel, oil, water, and solvents to which it is expected to be exposed in service and maintenance without hazardous deterioration or delamination.

(d) For reciprocating engine installations, each induction system duct must be—

(1) Strong enough to prevent induction system failures resulting from normal backfire conditions; and

(2) Fire resistant in any compartment for which a fire extinguishing system is required.

(e) Each inlet system duct for an auxiliary power unit must be—

(1) Fireproof within the auxiliary power unit compartment;

(2) Fireproof for a sufficient distance upstream of the auxiliary power unit compartment to prevent hot gas reverse flow from burning through the duct and entering any other compartment of the airplane in which a hazard would be created by the entry of the hot gases;

(3) Constructed of materials suitable to the environmental conditions expected in service, except in those areas requiring fireproof or fire resistant materials; and

(4) Constructed of materials that will not absorb or trap hazardous quantities of flammable fluids that could be ignited by a surge or reverse-flow condition.

(f) Induction system ducts that supply air to a cabin pressurization system must be suitably constructed of material that will not produce hazardous quantities of toxic gases or isolated to prevent hazardous quantities of toxic gases from entering the cabin during a powerplant fire.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13095, Aug. 13, 1969; Amdt. 23-43, 58 FR 18974, Apr. 9, 1993]

§ 23.1105 Induction system screens.

If induction system screens are used—

(a) Each screen must be upstream of the carburetor or fuel injection system.

(b) No screen may be in any part of the induction system that is the only passage through which air can reach the engine, unless—

(1) The available preheat is at least 100 °F.; and

(2) The screen can be deiced by heated air;

(c) No screen may be deiced by alcohol alone; and

(d) It must be impossible for fuel to strike any screen.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1996, as amended by Amdt. 23-51, 61 FR 5137, Feb. 9, 1996]

§ 23.1107 Induction system filters.

If an air filter is used to protect the engine against foreign material particles in the induction air supply—

(a) Each air filter must be capable of withstanding the effects of temperature extremes, rain, fuel, oil, and solvents to which it is expected to be exposed in service and maintenance; and

(b) Each air filter shall have a design feature to prevent material separated from the filter media from interfering with proper fuel metering operation.

[Doc. No. 26344, 58 FR 18974, Apr. 9, 1993, as amended by Amdt. 23-51, 61 FR 5137, Feb. 9,

1996]

§ 23.1109 Turbocharger bleed air system.

The following applies to turbocharged bleed air systems used for cabin pressurization:

- (a) The cabin air system may not be subject to hazardous contamination following any probable failure of the turbocharger or its lubrication system.
- (b) The turbocharger supply air must be taken from a source where it cannot be contaminated by harmful or hazardous gases or vapors following any probable failure or malfunction of the engine exhaust, hydraulic, fuel, or oil system.

[Amdt. 23–42, 56 FR 354, Jan. 3, 1991]

§ 23.1111 Turbine engine bleed air system.

For turbine engine bleed air systems, the following apply:

- (a) No hazard may result if duct rupture or failure occurs anywhere between the engine port and the airplane unit served by the bleed air.
- (b) The effect on airplane and engine performance of using maximum bleed air must be established.
- (c) Hazardous contamination of cabin air systems may not result from failures of the engine lubricating system.

[Amdt. 23–7, 34 FR 13095, Aug. 13, 1969, as amended by Amdt. 23–17, 41 FR 55465, Dec. 20, 1976]

Exhaust System

§ 23.1121 General.

For powerplant and auxiliary power unit installations, the following apply—

- (a) Each exhaust system must ensure safe disposal of exhaust gases without fire hazard or carbon monoxide contamination in any personnel compartment.
- (b) Each exhaust system part with a surface hot enough to ignite flammable fluids or vapors must be located or shielded so that leakage from any system carrying flammable fluids or vapors will not result in a fire caused by impingement of the fluids or vapors on any part of the exhaust system including shields for the exhaust system.
- (c) Each exhaust system must be separated by fireproof shields from adjacent flammable parts of the airplane that are outside of the engine and auxiliary power unit compartments.
- (d) No exhaust gases may discharge dangerously near any fuel or oil system drain.

- (e) No exhaust gases may be discharged where they will cause a glare seriously affecting pilot vision at night.
- (f) Each exhaust system component must be ventilated to prevent points of excessively high temperature.
- (g) If significant traps exist, each turbine engine and auxiliary power unit exhaust system must have drains discharging clear of the airplane, in any normal ground and flight attitude, to prevent fuel accumulation after the failure of an attempted engine or auxiliary power unit start.
- (h) Each exhaust heat exchanger must incorporate means to prevent blockage of the exhaust port after any internal heat exchanger failure.
- (i) For the purpose of compliance with §23.603, the failure of any part of the exhaust system will be considered to adversely affect safety.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13095, Aug. 13, 1969; Amdt. 23–18, 42 FR 15042, Mar. 17, 1977; Amdt. 23–43, 58 FR 18974, Apr. 9, 1993; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1123 Exhaust system.

- (a) Each exhaust system must be fireproof and corrosion-resistant, and must have means to prevent failure due to expansion by operating temperatures.
- (b) Each exhaust system must be supported to withstand the vibration and inertia loads to which it may be subjected in operation.
- (c) Parts of the system connected to components between which relative motion could exist must have means for flexibility.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18974, Apr. 9, 1993]

§ 23.1125 Exhaust heat exchangers.

For reciprocating engine powered airplanes the following apply:

- (a) Each exhaust heat exchanger must be constructed and installed to withstand the vibration, inertia, and other loads that it may be subjected to in normal operation. In addition—
 - (1) Each exchanger must be suitable for continued operation at high temperatures and resistant to corrosion from exhaust gases;
 - (2) There must be means for inspection of critical parts of each exchanger; and
 - (3) Each exchanger must have cooling provisions wherever it is subject to contact with exhaust gases.

(b) Each heat exchanger used for heating ventilating air must be constructed so that exhaust gases may not enter the ventilating air.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55465, Dec. 20, 1976]

Powerplant Controls and Accessories

§ 23.1141 Powerplant controls: General.

(a) Powerplant controls must be located and arranged under §23.777 and marked under §23.1555(a).

(b) Each flexible control must be shown to be suitable for the particular application.

(c) Each control must be able to maintain any necessary position without—

(1) Constant attention by flight crew members; or

(2) Tendency to creep due to control loads or vibration.

(d) Each control must be able to withstand operating loads without failure or excessive deflection.

(e) For turbine engine powered airplanes, no single failure or malfunction, or probable combination thereof, in any powerplant control system may cause the failure of any powerplant function necessary for safety.

(f) The portion of each powerplant control located in the engine compartment that is required to be operated in the event of fire must be at least fire resistant.

(g) Powerplant valve controls located in the cockpit must have—

(1) For manual valves, positive stops or in the case of fuel valves suitable index provisions, in the open and closed position; and

(2) For power-assisted valves, a means to indicate to the flight crew when the valve—

(i) Is in the fully open or fully closed position; or

(ii) Is moving between the fully open and fully closed position.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13095, Aug. 13, 1969; Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–18, 42 FR 15042, Mar. 17, 1977; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1142 Auxiliary power unit controls.

Means must be provided on the flight deck for the starting, stopping, monitoring, and emergency shutdown of each installed auxiliary power unit.

[Doc. No. 26344, 58 FR 18974, Apr. 9, 1993]

§ 23.1143 Engine controls.

- (a) There must be a separate power or thrust control for each engine and a separate control for each supercharger that requires a control.
- (b) Power, thrust, and supercharger controls must be arranged to allow—
- (1) Separate control of each engine and each supercharger; and
 - (2) Simultaneous control of all engines and all superchargers.
- (c) Each power, thrust, or supercharger control must give a positive and immediate responsive means of controlling its engine or supercharger.
- (d) The power, thrust, or supercharger controls for each engine or supercharger must be independent of those for every other engine or supercharger.
- (e) For each fluid injection (other than fuel) system and its controls not provided and approved as part of the engine, the applicant must show that the flow of the injection fluid is adequately controlled.
- (f) If a power, thrust, or a fuel control (other than a mixture control) incorporates a fuel shutoff feature, the control must have a means to prevent the inadvertent movement of the control into the off position. The means must—
- (1) Have a positive lock or stop at the idle position; and
 - (2) Require a separate and distinct operation to place the control in the shutoff position.
- (g) For reciprocating single-engine airplanes, each power or thrust control must be designed so that if the control separates at the engine fuel metering device, the airplane is capable of continued safe flight and landing.

[Amdt. 23–7, 34 FR 13095, Aug. 13, 1969, as amended by Amdt. 23–17, 41 FR 55465, Dec. 20, 1976; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–43, 58 FR 18974, Apr. 9, 1993; Amdt. 23–51, 61 FR 5137, Feb. 9, 1996]

§ 23.1145 Ignition switches.

- (a) Ignition switches must control and shut off each ignition circuit on each engine.
- (b) There must be means to quickly shut off all ignition on multiengine airplanes by the grouping of switches or by a master ignition control.
- (c) Each group of ignition switches, except ignition switches for turbine engines for which continuous ignition is not required, and each master ignition control must have a means to prevent its inadvertent operation.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–18, 42 FR 15042, Mar. 17, 1977; Amdt. 23–43, 58 FR 18974, Apr. 9, 1993]

§ 23.1147 Mixture controls.

(a) If there are mixture controls, each engine must have a separate control, and each mixture control must have guards or must be shaped or arranged to prevent confusion by feel with other controls.

(1) The controls must be grouped and arranged to allow—

(i) Separate control of each engine; and

(ii) Simultaneous control of all engines.

(2) The controls must require a separate and distinct operation to move the control toward lean or shut-off position.

(b) For reciprocating single-engine airplanes, each manual engine mixture control must be designed so that, if the control separates at the engine fuel metering device, the airplane is capable of continued safe flight and landing.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13096, Aug. 13, 1969; Amdt. 23–33, 51 FR 26657, July 24, 1986; Amdt. 23–43, 58 FR 18974, Apr. 9, 1993]

§ 23.1149 Propeller speed and pitch controls.

(a) If there are propeller speed or pitch controls, they must be grouped and arranged to allow—

(1) Separate control of each propeller; and

(2) Simultaneous control of all propellers.

(b) The controls must allow ready synchronization of all propellers on multiengine airplanes.

§ 23.1153 Propeller feathering controls.

If there are propeller feathering controls installed, it must be possible to feather each propeller separately. Each control must have a means to prevent inadvertent operation.

[Doc. No. 27804, 61 FR 5138, Feb. 9, 1996]

§ 23.1155 Turbine engine reverse thrust and propeller pitch settings below the flight regime.

For turbine engine installations, each control for reverse thrust and for propeller pitch settings below the flight regime must have means to prevent its inadvertent operation. The means must have a positive lock or stop at the flight idle position and must require a separate and distinct operation by the crew to displace the control from the flight regime (forward thrust regime for turbojet powered airplanes).

[Amdt. 23–7, 34 FR 13096, Aug. 13, 1969]

§ 23.1157 Carburetor air temperature controls.

There must be a separate carburetor air temperature control for each engine.

§ 23.1163 Powerplant accessories.

(a) Each engine mounted accessory must—

(1) Be approved for mounting on the engine involved and use the provisions on the engines for mounting; or

(2) Have torque limiting means on all accessory drives in order to prevent the torque limits established for those drives from being exceeded; and

(3) In addition to paragraphs (a)(1) or (a)(2) of this section, be sealed to prevent contamination of the engine oil system and the accessory system.

(b) Electrical equipment subject to arcing or sparking must be installed to minimize the probability of contact with any flammable fluids or vapors that might be present in a free state.

(c) Each generator rated at or more than 6 kilowatts must be designed and installed to minimize the probability of a fire hazard in the event it malfunctions.

(d) If the continued rotation of any accessory remotely driven by the engine is hazardous when malfunctioning occurs, a means to prevent rotation without interfering with the continued operation of the engine must be provided.

(e) Each accessory driven by a gearbox that is not approved as part of the powerplant driving the gearbox must—

(1) Have torque limiting means to prevent the torque limits established for the affected drive from being exceeded;

(2) Use the provisions on the gearbox for mounting; and

(3) Be sealed to prevent contamination of the gearbox oil system and the accessory system.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–34, 52 FR 1832, Jan. 15, 1987; Amdt. 23–42, 56 FR 354, Jan. 3, 1991]

23.1165 Engine ignition systems.

(a) Each battery ignition system must be supplemented by a generator that is automatically available as an alternate source of electrical energy to allow continued engine

23.1165 Sistemas de ignição do motor.

(a) Cada sistema de ignição alimentado por bateria deve ser suplementado por um gerador que está automaticamente disponível como fonte alternativa de energia elétrica para

<p>operation if any battery becomes depleted.</p> <p>(b) The capacity of batteries and generators must be large enough to meet the simultaneous demands of the engine ignition system and the greatest demands of any electrical system components that draw from the same source.</p> <p>(c) The design of the engine ignition system must account for:</p> <p>(1) The condition of an inoperative generator;</p> <p>(2) The condition of a completely depleted battery with the generator running at its normal operating speed; and</p> <p>(3) The condition of a completely depleted battery with the generator operating at idling speed, if there is only one battery.</p> <p>(d) There must be means to warn appropriate crewmembers if malfunctioning of any part of the electrical system is causing the continuous discharge of any battery used for engine ignition.</p> <p>(e) Each turbine engine ignition system must be independent of any electrical circuit that is not used for assisting, controlling, or analyzing the operation of that system.</p> <p>(f) In addition, for commuter category airplanes, each turbine engine ignition system must be an essential electrical load.</p>	<p>permitir a operação continuada do motor se qualquer bateria se descarregar.</p> <p>(b) A capacidade das baterias e dos geradores deve ser grande o suficiente para suprir as demandas simultâneas do sistema de ignição do motor e as maiores demandas de quaisquer componentes do sistema elétrico que são alimentados pela mesma fonte.</p> <p>(c) O projeto do sistema de ignição do motor deve levar em conta:</p> <p>(1) A condição de um gerador inoperante;</p> <p>(2) A condição de uma bateria completamente descarregada com o gerador operando em sua velocidade normal de operação; e</p> <p>(3) A condição de uma bateria completamente descarregada com o gerador operando em velocidade de marcha lenta, se houver apenas uma bateria.</p> <p>(d) Deve haver meios de alertar os membros apropriados da tripulação se o mau funcionamento de qualquer parte do sistema elétrico está causando o descarregamento contínuo de qualquer bateria utilizada para a ignição do motor.</p> <p>(e) Cada sistema de ignição de motores à turbina deve ser independente de qualquer circuito elétrico que não é utilizado para auxiliar, controlar ou analisar a operação daquele sistema.</p> <p>(f) Em adição, para aviões categoria transporte regional, cada sistema de ignição de motores a turbina deve ser uma carga elétrica essencial.</p>
---	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-17, 41 FR 55465 Dec. 20, 1976; Amdt. 23-34, 52 FR 1833, Jan. 15, 1987; Amdt. 23-62, 76 FR 75759, Dec. 2, 2011]

Powerplant Fire Protection

§ 23.1181 Designated fire zones; regions included.

Designated fire zones are—

(a) For reciprocating engines—

(1) The power section;

(2) The accessory section;

(3) Any complete powerplant compartment in which there is no isolation between the power section and the accessory section.

(b) For turbine engines—

(1) The compressor and accessory sections;

(2) The combustor, turbine and tailpipe sections that contain lines or components carrying flammable fluids or gases.

(3) Any complete powerplant compartment in which there is no isolation between compressor, accessory, combustor, turbine, and tailpipe sections.

(c) Any auxiliary power unit compartment; and

(d) Any fuel-burning heater, and other combustion equipment installation described in §23.859.

[Doc. No. 26344, 58 FR 18975, Apr. 9, 1993, as amended by Amdt. 23–51, 61 FR 5138, Feb. 9, 1996]

§ 23.1182 Nacelle areas behind firewalls.

Components, lines, and fittings, except those subject to the provisions of §23.1351(e), located behind the engine-compartment firewall must be constructed of such materials and located at such distances from the firewall that they will not suffer damage sufficient to endanger the airplane if a portion of the engine side of the firewall is subjected to a flame temperature of not less than 2000 °F for 15 minutes.

[Amdt. 23–14, 38 FR 31816, Nov. 19, 1973]

§ 23.1183 Lines, fittings, and components.

(a) Except as provided in paragraph (b) of this section, each component, line, and fitting carrying flammable fluids, gas, or air in any area subject to engine fire conditions must be at least fire resistant, except that flammable fluid tanks and supports which are part of and attached to the engine must be fireproof or be enclosed by a fireproof shield unless damage by fire to any non-fireproof part will not cause leakage or spillage of flammable fluid. Components must be shielded or located so as to safeguard against the ignition of leaking flammable fluid. Flexible hose assemblies (hose and end fittings) must be shown to be suitable for the particular application. An integral oil sump of less than 25–quart capacity on a reciprocating engine need not be fireproof nor be enclosed by a fireproof shield.

(b) Paragraph (a) of this section does not apply to—

(1) Lines, fittings, and components which are already approved as part of a type certificated engine; and

(2) Vent and drain lines, and their fittings, whose failure will not result in, or add to, a fire hazard.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–5, 32 FR 6912, May 5, 1967; Amdt. 23–15, 39 FR 35460, Oct. 1, 1974; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–51, 61 FR 5138, Feb. 9, 1996]

§ 23.1189 Shutoff means.

(a) For each multiengine airplane the following apply:

(1) Each engine installation must have means to shut off or otherwise prevent hazardous quantities of fuel, oil, deicing fluid, and other flammable liquids from flowing into, within, or through any engine compartment, except in lines, fittings, and components forming an integral part of an engine.

(2) The closing of the fuel shutoff valve for any engine may not make any fuel unavailable to the remaining engines that would be available to those engines with that valve open.

(3) Operation of any shutoff means may not interfere with the later emergency operation of other equipment such as propeller feathering devices.

(4) Each shutoff must be outside of the engine compartment unless an equal degree of safety is provided with the shutoff inside the compartment.

(5) Not more than one quart of flammable fluid may escape into the engine compartment after engine shutoff. For those installations where the flammable fluid that escapes after shutdown cannot be limited to one quart, it must be demonstrated that this greater amount can be safely contained or drained overboard.

(6) There must be means to guard against inadvertent operation of each shutoff means, and to make it possible for the crew to reopen the shutoff means in flight after it has been closed.

(b) Turbine engine installations need not have an engine oil system shutoff if—

(1) The oil tank is integral with, or mounted on, the engine; and

(2) All oil system components external to the engine are fireproof or located in areas not subject to engine fire conditions.

(c) Power operated valves must have means to indicate to the flight crew when the valve has reached the selected position and must be designed so that the valve will not move from the selected position under vibration conditions likely to exist at the valve location.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13096, Aug. 13, 1969; Amdt. 23–14, 38 FR 31823, Nov. 19, 1973; Amdt. 23–29, 49 FR 6847, Feb. 23, 1984; Amdt. 23–43, 58 FR 18975, Apr. 9, 1993]

§ 23.1191 Firewalls.

- (a) Each engine, auxiliary power unit, fuel burning heater, and other combustion equipment, must be isolated from the rest of the airplane by firewalls, shrouds, or equivalent means.
- (b) Each firewall or shroud must be constructed so that no hazardous quantity of liquid, gas, or flame can pass from the compartment created by the firewall or shroud to other parts of the airplane.
- (c) Each opening in the firewall or shroud must be sealed with close fitting, fireproof grommets, bushings, or firewall fittings.
- (d) [Reserved]
- (e) Each firewall and shroud must be fireproof and protected against corrosion.
- (f) Compliance with the criteria for fireproof materials or components must be shown as follows:
- (1) The flame to which the materials or components are subjected must be $2,000 \pm 150$ °F.
 - (2) Sheet materials approximately 10 inches square must be subjected to the flame from a suitable burner.
 - (3) The flame must be large enough to maintain the required test temperature over an area approximately five inches square.
- (g) Firewall materials and fittings must resist flame penetration for at least 15 minutes.
- (h) The following materials may be used in firewalls or shrouds without being tested as required by this section:
- (1) Stainless steel sheet, 0.015 inch thick.
 - (2) Mild steel sheet (coated with aluminum or otherwise protected against corrosion) 0.018 inch thick.
 - (3) Terne plate, 0.018 inch thick.
 - (4) Monel metal, 0.018 inch thick.
 - (5) Steel or copper base alloy firewall fittings.
 - (6) Titanium sheet, 0.016 inch thick.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18975, Apr. 9, 1993; 58 FR 27060, May 6, 1993; Amdt. 23–51, 61 FR 5138, Feb. 9, 1996]

§ 23.1192 Engine accessory compartment diaphragm.

For aircooled radial engines, the engine power section and all portions of the exhaust system must be

isolated from the engine accessory compartment by a diaphragm that meets the firewall requirements of §23.1191.

[Amdt. 23–14, 38 FR 31823, Nov. 19, 1973]

<p>23.1193 Cowling and nacelle.</p> <p>(a) Each cowling must be constructed and supported so that it can resist any vibration, inertia, and air loads to which it may be subjected in operation.</p> <p>(b) There must be means for rapid and complete drainage of each part of the cowling in the normal ground and flight attitudes. Drain operation may be shown by test, analysis, or both, to ensure that under normal aerodynamic pressure distribution expected in service each drain will operate as designed. No drain may discharge where it will cause a fire hazard.</p> <p>(c) Cowling must be at least fire resistant.</p> <p>(d) Each part behind an opening in the engine compartment cowling must be at least fire resistant for a distance of at least 24 inches (610 mm) aft of the opening.</p> <p>(e) Each part of the cowling subjected to high temperatures due to its nearness to exhaust system ports or exhaust gas impingement, must be fire proof.</p> <p>(f) Each nacelle of a multiengine airplane with supercharged engines must be designed and constructed so that with the landing gear retracted, a fire in the engine compartment will not burn through a cowling or nacelle and enter a nacelle area other than the engine compartment.</p> <p>(g) In addition, for all airplanes with engine(s) embedded in the fuselage or in pylons on the aft fuselage, the airplane must be designed so that no fire originating in any engine compartment can enter, either through openings or by burn-through, any other region where it would create additional hazards.</p>	<p>23.1193 Capota e nacele.</p> <p>(a) Cada capota deve ser construída e apoiada de forma que possa resistir quaisquer cargas de vibração, inércia, e ar as quais ela possa estar sujeita em operação.</p> <p>(b) Deve haver meio para drenagem rápida e completa de cada parte da capota nas atitudes normais de solo e voo. A operação de drenagem pode ser mostrada por ensaio, análise, ou ambos, para assegurar que sob distribuição de pressão aerodinâmica normal esperada em serviço cada dreno operará conforme projetado. Nenhum dreno pode descarregar onde causará um perigo de incêndio.</p> <p>(c) A capota deve ser ao menos resistente a fogo.</p> <p>(d) Cada parte atrás de uma abertura na capota do compartimento do motor deve ser ao menos resistente a fogo para uma distância de 24 polegadas (610 mm) para trás da abertura.</p> <p>(e) Cada parte da capota sujeita a temperaturas altas devido à proximidade de saídas do sistema de exaustão ou recebendo impacto do gás de exaustão, deve ser a prova de fogo.</p> <p>(f) Cada nacele de um avião multimotor equipado com motores superalimentados deve ser projetado e construído de forma que com o trem de pouso recolhido, um fogo do compartimento do motor não atravesse uma capota ou nacele e entre numa área de nacele que não seja a do compartimento do motor.</p> <p>(g) Além disso, para todos aviões com motor(es) incorporado(s) à fuselagem ou em pilones na fuselagem traseira, o avião deve ser projetado de forma que nenhum fogo originado em qualquer compartimento do motor possa</p>
---	---

	entrar, seja pelas aberturas ou atravessando o revestimento externo, qualquer outra zona onde ele possa criar perigos adicionais.
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-18, 42 FR 15042, Mar. 17, 1977; Amdt. 23-34, 52 FR 1833, Jan. 15, 1987; 58 FR 18975, Apr. 9, 1993; Amdt. 23-62, 76 FR 75759, Dec. 2, 2011]

<p>23.1195 Fire extinguishing systems.</p> <p>(a) For commuter category airplanes, and all airplanes with engine(s) embedded in the fuselage or in pylons on the aft fuselage, fire extinguishing systems must be installed and compliance shown with the following:</p> <p>(1) Except for combustor, turbine, and tailpipe sections of turbine-engine installations that contain lines or components carrying flammable fluids or gases for which a fire originating in these sections is shown to be controllable, a fire extinguisher system must serve each engine compartment;</p> <p>(2) The fire extinguishing system, the quantity of the extinguishing agent, the rate of discharge, and the discharge distribution must be adequate to extinguish fires. An individual “one shot” system may be used, except for engine(s) embedded in the fuselage, where a “two shot” system is required.</p> <p>(3) The fire extinguishing system for a nacelle must be able to simultaneously protect each compartment of the nacelle for which protection is provided.</p> <p>(b) If an auxiliary power unit is installed in any airplane certificated to this RBAC, that auxiliary power unit compartment must be served by a fire extinguishing system meeting the requirements of paragraph (a)(2) of this section.</p>	<p>23.1195 Sistemas de extinção de incêndio.</p> <p>(a) Para aviões da categoria transporte regional e todos aviões com motor(es) incorporado(s) à fuselagem ou em pilones na fuselagem traseira, sistemas devem ser instalados e cumprimento mostrado com o seguinte:</p> <p>(1) À exceção das seções do combustor, da turbina, e do duto de exaustão de instalações de motor à turbina que contenham linhas ou componentes conduzindo fluidos ou gases inflamáveis para as quais um fogo originado nestas seções seja mostrado ser controlável, um sistema de extinção de incêndio deve servir a cada compartimento de motor;</p> <p>(2) O sistema de extinção de incêndio, a quantidade de agente extintor, a taxa de descarga, e a distribuição deve ser adequada para extinguir fogos. Um sistema individual de disparo único pode ser usado, exceto para motor(es) incorporado(s) à fuselagem em que um sistema com dois disparos é requerido.</p> <p>(3) O sistema de extinção de incêndio para uma nacele deve ser capaz de simultaneamente proteger cada compartimento da nacele para o qual a proteção é provida.</p> <p>(b) Se uma unidade auxiliar de potência é instalada em qualquer avião certificado sob este regulamento, aquele compartimento da unidade auxiliar de potência deve ser servido de um sistema de extinção de incêndio que satisfaça os requisitos do parágrafo (a)(2) desta seção.</p>
--	--

[Amdt. 23-34, 52 FR 1833, Jan. 15, 1987, as amended by Amdt. 23-43, 58 FR 18975, Apr. 9, 1993; Amdt. 23-62, 76 FR 75759, Dec. 2, 2011]

<p>23.1197 Fire extinguishing agents.</p> <p>For commuter category airplanes, and all airplanes with engine(s) embedded in the fuselage or in pylons on the aft fuselage the following applies:</p> <p>(a) Fire extinguishing agents must:</p> <p>(1) Be capable of extinguishing flames emanating from any burning of fluids or other combustible materials in the area protected by the fire extinguishing system; and</p> <p>(2) Have thermal stability over the temperature range likely to be experienced in the compartment in which they are stored.</p> <p>(b) If any toxic extinguishing agent is used, provisions must be made to prevent harmful concentrations of fluid or fluid vapors (from leakage during normal operation of the airplane or as a result of discharging the fire extinguisher on the ground or in flight) from entering any personnel compartment, even though a defect may exist in the extinguishing system. This must be shown by test except for built-in carbon dioxide fuselage compartment fire extinguishing systems for which:</p> <p>(1) Five pounds (2,3 kg) or less of carbon dioxide will be discharged, under established fire control procedures, into any fuselage compartment; or</p> <p>(2) Protective breathing equipment is available for each flight crewmember on flight deck duty.</p>	<p>23.1197 Agentes extintores de incêndio.</p> <p>Para aviões da categoria transporte regional e todos aviões com motor(es) incorporado(s) à fuselagem ou em pilones na fuselagem traseira, aplica-se o seguinte:</p> <p>(a) Agentes extintores de incêndio devem:</p> <p>(1) Ser capazes de extinguir chamas oriundas de qualquer queima de fluidos ou outro material combustível na área protegida pelo sistema de extinção de incêndio; e</p> <p>(2) Ter estabilidade térmica na faixa de temperatura esperada que aconteça no compartimento no qual esteja instalado.</p> <p>(b) Se algum agente extintor tóxico é utilizado, deve haver provisões para evitar que concentrações danosas de fluido ou vapores de fluido (provenientes de vazamento durante operação normal do avião ou como resultado da descarga do extintor de incêndio em solo ou em voo) entrem em qualquer compartimento pessoal, mesmo que exista um defeito no sistema de extinção. Isto deve ser mostrado por ensaio à exceção de sistemas de extinção de incêndio de dióxido de carbono embutidos no compartimento da fuselagem para os quais:</p> <p>(1) Cinco libras (2,3 kg) ou menos de dióxido de carbono serão descarregados, sob procedimentos estabelecidos de controle de incêndio, dentro de qualquer compartimento da fuselagem; ou</p> <p>(2) Equipamento de proteção à respiração está disponível para cada membro da tripulação na cabine de comando.</p>
--	---

[Amdt. 23-34, 52 FR 1833, Jan. 15, 1987, as amended by Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

<p>23.1199 Extinguishing agent containers.</p> <p>For commuter category airplanes, and all airplanes with engine(s) embedded in the fuselage or in pylons on the aft fuselage the</p>	<p>23.1199 Recipientes do agente extintor.</p> <p>Para aviões da categoria transporte regional e todos aviões com motor(es) incorporado(s) à fuselagem ou em pilones na fuselagem traseira,</p>
--	--

<p>following applies:</p> <p>(a) Each extinguishing agent container must have a pressure relief to prevent bursting of the container by excessive internal pressures.</p> <p>(b) The discharge end of each discharge line from a pressure relief connection must be located so that discharge of the fire extinguishing agent would not damage the airplane. The line must also be located or protected to prevent clogging caused by ice or other foreign matter.</p> <p>(c) A means must be provided for each fire extinguishing agent container to indicate that the container has discharged or that the charging pressure is below the established minimum necessary for proper functioning.</p> <p>(d) The temperature of each container must be maintained, under intended operating conditions, to prevent the pressure in the container from:</p> <p>(1) Falling below that necessary to provide an adequate rate of discharge; or</p> <p>(2) Rising high enough to cause premature discharge.</p> <p>(e) If a pyrotechnic capsule is used to discharge the extinguishing agent, each container must be installed so that temperature conditions will not cause hazardous deterioration of the pyrotechnic capsule.</p>	<p>aplica-se o seguinte:</p> <p>(a) Cada recipiente do agente extintor deve ter um alívio de pressão para impedir a explosão do recipiente por pressões internas excessivas.</p> <p>(b) A saída de descarga de cada linha de descarga de uma conexão de alívio de pressão deve estar localizada de forma que a descarga do agente extintor de incêndio não cause danos ao avião. A linha também deve ser localizada ou protegida para impedir entupimento causado por gelo ou outro corpo estranho.</p> <p>(c) Um meio deve ser provido para cada recipiente de agente extintor de fogo para indicar que o recipiente foi descarregado ou que a carga de pressão está abaixo do mínimo necessário estabelecido para funcionamento apropriado.</p> <p>(d) A temperatura de cada recipiente deve ser mantida, sob condições operacionais pretendidas, para impedir a pressão no recipiente de:</p> <p>(1) Cair abaixo do necessário para prover uma taxa de descarga adequada; ou</p> <p>(2) Aumentar suficientemente para causar descarga prematura.</p> <p>(e) Se uma cápsula pirotécnica for utilizada para descarregar o agente extintor, cada recipiente deve ser instalado de forma que as condições de temperatura não provoquem deterioração perigosa da cápsula pirotécnica.</p>
--	---

[Amdt. 23-34, 52 FR 1833, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

<p>23.1201 Fire extinguishing systems materials.</p> <p>For commuter category airplanes, and all airplanes with engine(s) embedded in the fuselage or in pylons on the aft fuselage the following applies:</p>	<p>23.1201 Materiais de sistemas de extinção de incêndio.</p> <p>Para aviões da categoria transporte regional e todos aviões com motor(es) incorporado(s) à fuselagem ou em pilones na fuselagem traseira, aplica-se o seguinte:</p>
---	---

(a) No material in any fire extinguishing system may react chemically with any extinguishing agent so as to create a hazard.	(a) Nenhum material em qualquer sistema de extinção pode reagir quimicamente com qualquer agente extintor de forma a criar um perigo.
(b) Each system component in an engine compartment must be fireproof.	(b) Cada componente do sistema em um compartimento de motor deve ser a prova de fogo.

[Amdt. 23-34, 52 FR 1833, Jan. 15, 1987; 52 FR 7262, Mar. 9, 1987; Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

§ 23.1203 Fire detector system.

- (a) There must be means that ensure the prompt detection of a fire in—
 - (1) An engine compartment of—
 - (i) Multiengine turbine powered airplanes;
 - (ii) Multiengine reciprocating engine powered airplanes incorporating turbochargers;
 - (iii) Airplanes with engine(s) located where they are not readily visible from the cockpit; and
 - (iv) All commuter category airplanes.
 - (2) The auxiliary power unit compartment of any airplane incorporating an auxiliary power unit.
- (b) Each fire detector must be constructed and installed to withstand the vibration, inertia, and other loads to which it may be subjected in operation.
- (c) No fire detector may be affected by any oil, water, other fluids, or fumes that might be present.
- (d) There must be means to allow the crew to check, in flight, the functioning of each fire detector electric circuit.
- (e) Wiring and other components of each fire detector system in a designated fire zone must be at least fire resistant.

[Amdt. 23-18, 42 FR 15042, Mar. 17, 1977, as amended by Amdt. 23-34, 52 FR 1833, Jan. 15, 1987; Amdt. 23-43, 58 FR 18975, Apr. 9, 1993; Amdt. 23-51, 61 FR 5138, Feb. 9, 1996]

Subpart F—Equipment

General

23.1301 Function and installation.	23.1301 Função e instalação.
Each item of installed equipment must:	Cada item do equipamento instalado deve:

<p>(a) Be of a kind and design appropriate to its intended function.</p> <p>(b) Be labeled as to its identification, function, or operating limitations, or any applicable combination of these factors; and</p> <p>(c) Be installed according to limitations specified for that equipment.</p>	<p>(a) Ser de um tipo e projeto apropriado para a função pretendida;</p> <p>(b) Ser rotulado com a sua identificação, função ou limitações, ou qualquer combinação aplicável desses fatores; e</p> <p>(c) Ser instalado de acordo com as limitações especificadas para aquele equipamento.</p>
---	--

[Amdt. 23-20, 42 FR 36968, July 18, 1977, as amended by Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

<p>23.1303 Flight and navigation instruments.</p> <p>The following are the minimum required flight and navigation instruments:</p> <p>(a) An airspeed indicator.</p> <p>(b) An altimeter.</p> <p>(c) A magnetic direction indicator.</p> <p>(d) For reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight and turbine engine powered airplanes, a free air temperature indicator or an air-temperature indicator which provides indications that are convertible to free-air.</p> <p>(e) A speed warning device for:</p> <p>(1) Turbine engine powered airplanes; and</p> <p>(2) Other airplanes for which V_{MO}/M_{MO} and V_D/M_D are established under paragraphs 23.335(b)(4) and 23.1505(c) if V_{MO}/M_{MO} is greater than 0,8 V_D/M_D.</p> <p>The speed warning device must give effective aural warning (differing distinctively from aural warnings used for other purposes) to the pilots whenever the speed exceeds V_{MO} plus 6 knots or $M_{MO}+0.01$. The upper limit of the production tolerance for the warning device may not exceed the prescribed warning speed. The lower limit of the warning device must be</p>	<p>23.1303 Instrumentos de voo e de navegação.</p> <p>Os seguintes instrumentos de voo e de navegação são os mínimos exigidos:</p> <p>(a) Um indicador de velocidade no ar.</p> <p>(b) Um altímetro.</p> <p>(c) Um indicador de direção magnética.</p> <p>(d) Para aviões com motores alternativo com mais de 6.000 lb (2.722 kg) de peso máximo e aviões com motores à turbina, um indicador de temperatura do ar externo ou um indicador de temperatura do ar que forneça indicações que sejam conversíveis para o ar externo.</p> <p>(e) Um alarme de velocidade para:</p> <p>(1) Aviões com motor a turbina; e</p> <p>(2) Outros aviões em que V_{MO}/M_{MO} e V_D/M_D são determinados pelos parágrafos 23.335(b)(4) e 23.1505(c) se V_{MO}/M_{MO} for maior que 0,8 V_D/M_D.</p> <p>O dispositivo de alarme de velocidade deve fornecer alarme sonoro efetivo (diferindo claramente de alarmes sonoros utilizados para outros propósitos) para os pilotos sempre que a velocidade exceder V_{MO} mais 6 nós ou $M_{MO} +0,01$. O limite superior da tolerância de produção para o dispositivo de alarme não poderá exceder a velocidade de alarme</p>
--	--

<p>set to minimize nuisance warning;</p> <p>(f) When an attitude display is installed, the instrument design must not provide any means, accessible to the flightcrew, of adjusting the relative positions of the attitude reference symbol and the horizon line beyond that necessary for parallax correction.</p> <p>(g) In addition, for commuter category airplanes:</p> <p>(1) If airspeed limitations vary with altitude, the airspeed indicator must have a maximum allowable airspeed indicator showing the variation of V_{MO} with altitude.</p> <p>(2) The altimeter must be a sensitive type.</p> <p>(3) Having a passenger seating configuration of 10 or more, excluding the pilot's seats and that are approved for IFR operations, a third attitude instrument must be provided that:</p> <p>(i) Is powered from a source independent of the electrical generating system;</p> <p>(ii) Continues reliable operation for a minimum of 30 minutes after total failure of the electrical generating system;</p> <p>(iii) Operates independently of any other attitude indicating system;</p> <p>(iv) Is operative without selection after total failure of the electrical generating system;</p> <p>(v) Is located on the instrument panel in a position acceptable to the Administrator that will make it plainly visible to and usable by any pilot at the pilot's station; and</p> <p>(vi) Is appropriately lighted during all phases of operation.</p>	<p>determinada. O limite inferior do dispositivo de alarme deve ser ajustado para minimizar alarme importuno.</p> <p>(f) Quando um indicador de atitude for instalado, o projeto do instrumento não poderá proporcionar nenhum modo, acessível à tripulação de voo, de ajuste das posições relativas do símbolo de referência de atitude e da linha do horizonte além do que for necessário para correção de paralaxe.</p> <p>(g) Além disso, para aviões categoria transporte regional:</p> <p>(1) Se as limitações de velocidade variam com a altitude, o indicador de velocidade no ar deve ter um indicador de velocidade máxima permitida mostrando a variação de V_{MO} com a altitude.</p> <p>(2) O altímetro deve ser de precisão.</p> <p>(3) Tendo uma configuração para 10 ou mais assentos de passageiros, excluindo os assentos dos pilotos e que sejam aprovados para operações IFR, um terceiro instrumento de atitude será necessário e deverá:</p> <p>(i) Ser alimentado por uma fonte independente do sistema de geração elétrica;</p> <p>(ii) Continuar em operação confiável por um mínimo de 30 minutos após perda total do sistema de geração elétrica;</p> <p>(iii) Operar independentemente de qualquer outro sistema de indicação de atitude;</p> <p>(iv) Estar operante, sem precisar ser selecionado, após perda total do sistema de geração elétrica;</p> <p>(v) Estar localizado no painel de instrumentos em uma posição aceitável pela autoridade de aviação civil e que seja claramente visível e utilizável por qualquer piloto em seu posto normal de trabalho; e</p>
--	---

	(vi) Ser iluminado apropriadamente durante todas as fases de operação.
--	--

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-17, 41 FR 55465, Dec. 20, 1976; Amdt. 23-43, 58 FR 18975, Apr. 9, 1993; Amdt. 23-49, 61 FR 5168, Feb. 9, 1996; Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

§ 23.1305 Powerplant instruments.

The following are required powerplant instruments:

- (a) For all airplanes. (1) A fuel quantity indicator for each fuel tank, installed in accordance with §23.1337(b).
- (2) An oil pressure indicator for each engine.
- (3) An oil temperature indicator for each engine.
- (4) An oil quantity measuring device for each oil tank which meets the requirements of §23.1337(d).
- (5) A fire warning means for those airplanes required to comply with §23.1203.
- (b) For reciprocating engine-powered airplanes. In addition to the powerplant instruments required by paragraph (a) of this section, the following powerplant instruments are required:
 - (1) An induction system air temperature indicator for each engine equipped with a preheater and having induction air temperature limitations that can be exceeded with preheat.
 - (2) A tachometer indicator for each engine.
 - (3) A cylinder head temperature indicator for—
 - (i) Each air-cooled engine with cowl flaps;
 - (ii) [Reserved]
 - (iii) Each commuter category airplane.
 - (4) For each pump-fed engine, a means:
 - (i) That continuously indicates, to the pilot, the fuel pressure or fuel flow; or
 - (ii) That continuously monitors the fuel system and warns the pilot of any fuel flow trend that could lead to engine failure.
 - (5) A manifold pressure indicator for each altitude engine and for each engine with a controllable propeller.

(6) For each turbocharger installation:

(i) If limitations are established for either carburetor (or manifold) air inlet temperature or exhaust gas or turbocharger turbine inlet temperature, indicators must be furnished for each temperature for which the limitation is established unless it is shown that the limitation will not be exceeded in all intended operations.

(ii) If its oil system is separate from the engine oil system, oil pressure and oil temperature indicators must be provided.

(7) A coolant temperature indicator for each liquid-cooled engine.

(c) For turbine engine-powered airplanes. In addition to the powerplant instruments required by paragraph (a) of this section, the following powerplant instruments are required:

(1) A gas temperature indicator for each engine.

(2) A fuel flowmeter indicator for each engine.

(3) A fuel low pressure warning means for each engine.

(4) A fuel low level warning means for any fuel tank that should not be depleted of fuel in normal operations.

(5) A tachometer indicator (to indicate the speed of the rotors with established limiting speeds) for each engine.

(6) An oil low pressure warning means for each engine.

(7) An indicating means to indicate the functioning of the powerplant ice protection system for each engine.

(8) For each engine, an indicating means for the fuel strainer or filter required by §23.997 to indicate the occurrence of contamination of the strainer or filter before it reaches the capacity established in accordance with §23.997(d).

(9) For each engine, a warning means for the oil strainer or filter required by §23.1019, if it has no bypass, to warn the pilot of the occurrence of contamination of the strainer or filter screen before it reaches the capacity established in accordance with §23.1019(a)(5).

(10) An indicating means to indicate the functioning of any heater used to prevent ice clogging of fuel system components.

(d) For turbojet/turbofan engine-powered airplanes. In addition to the powerplant instruments required by paragraphs (a) and (c) of this section, the following powerplant instruments are required:

(1) For each engine, an indicator to indicate thrust or to indicate a parameter that can be related to thrust, including a free air temperature indicator if needed for this purpose.

(2) For each engine, a position indicating means to indicate to the flight crew when the thrust reverser, if installed, is in the reverse thrust position.

(e) For turbopropeller-powered airplanes. In addition to the powerplant instruments required by paragraphs (a) and (c) of this section, the following powerplant instruments are required:

(1) A torque indicator for each engine.

(2) A position indicating means to indicate to the flight crew when the propeller blade angle is below the flight low pitch position, for each propeller, unless it can be shown that such occurrence is highly improbable.

[Doc. No. 26344, 58 FR 18975, Apr. 9, 1993; 58 FR 27060, May 6, 1993; Amdt. 23–51, 61 FR 5138, Feb. 9, 1996; Amdt. 23–52, 61 FR 13644, Mar. 27, 1996]

<p>23.1306 Electrical and electronic system lightning protection.</p> <p>(a) Each electrical and electronic system that performs a function, for which failure would prevent the continued safe flight and landing of the airplane, must be designed and installed so that</p> <p>(1) The function is not adversely affected during and after the time the airplane is exposed to lightning; and</p> <p>(2) The system automatically recovers normal operation of that function in a timely manner after the airplane is exposed to lightning.</p> <p>(b) For airplanes approved for instrument flight rules operation, each electrical and electronic system that performs a function, for which failure would reduce the capability of the airplane or the ability of the flightcrew to respond to an adverse operating condition, must be designed and installed so that the function recovers normal operation in a timely manner after the airplane is exposed to lightning.</p>	<p>23.1306 Proteção contra efeitos de descargas atmosféricas para sistemas elétricos e eletrônicos.</p> <p>(a) Cada sistema elétrico e eletrônico que desempenhe uma função cuja falha impediria a continuação segura do voo e pouso do avião deve ser projetado e instalado de modo que:</p> <p>(1) A função não seja afetada adversamente durante e após o período em que o avião é exposto à descarga atmosférica; e</p> <p>(2) O sistema automaticamente recupere a operação normal daquela função em tempo adequado após o avião ser exposto à descarga atmosférica.</p> <p>(b) Para aviões aprovados para operação de acordo com as regras de voo por instrumentos, cada sistema elétrico e eletrônico que desempenhe uma função cuja falha reduziria a capacidade do avião ou a habilidade da tripulação de voo de reagir a uma condição adversa de operação deve ser projetado e instalado de modo que a função recupere sua operação normal em tempo adequado após o avião ser exposto à descarga atmosférica.</p>
--	--

[Doc. No. FAA–2010–0224; 76 FR 33135, June 8, 2011]

§ 23.1307 Miscellaneous equipment.

The equipment necessary for an airplane to operate at the maximum operating altitude and in the

kinds of operation and meteorological conditions for which certification is requested and is approved in accordance with §23.1559 must be included in the type design.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–23, 43 FR 50593, Oct. 30, 1978; Amdt. 23–43, 58 FR 18976, Apr. 9, 1993; Amdt. 23–49, 61 FR 5168, Feb. 9, 1996]

§ 23.1308 High-intensity Radiated Fields (HIRF) Protection.

(a) Except as provided in paragraph (d) of this section, each electrical and electronic system that performs a function whose failure would prevent the continued safe flight and landing of the airplane must be designed and installed so that—

(1) The function is not adversely affected during and after the time the airplane is exposed to HIRF environment I, as described in appendix J to this part;

(2) The system automatically recovers normal operation of that function, in a timely manner, after the airplane is exposed to HIRF environment I, as described in appendix J to this part, unless the system's recovery conflicts with other operational or functional requirements of the system; and

(3) The system is not adversely affected during and after the time the airplane is exposed to HIRF environment II, as described in appendix J to this part.

(b) Each electrical and electronic system that performs a function whose failure would significantly reduce the capability of the airplane or the ability of the flightcrew to respond to an adverse operating condition must be designed and installed so the system is not adversely affected when the equipment providing the function is exposed to equipment HIRF test level 1 or 2, as described in appendix J to this part.

(c) Each electrical and electronic system that performs a function whose failure would reduce the capability of the airplane or the ability of the flightcrew to respond to an adverse operating condition must be designed and installed so the system is not adversely affected when the equipment providing the function is exposed to equipment HIRF test level 3, as described in appendix J to this part.

(d) Before December 1, 2012, an electrical or electronic system that performs a function whose failure would prevent the continued safe flight and landing of an airplane may be designed and installed without meeting the provisions of paragraph (a) provided—

(1) The system has previously been shown to comply with special conditions for HIRF, prescribed under §21.16, issued before December 1, 2007;

(2) The HIRF immunity characteristics of the system have not changed since compliance with the special conditions was demonstrated; and

(3) The data used to demonstrate compliance with the special conditions is provided.

[Doc. No. FAA–2006–23657, 72 FR 44024, Aug. 6, 2007]

23.1309 Equipment, systems, and installations.	23.1309 Equipamentos, sistemas e instalações.
<p>The requirements of this section, except as identified in paragraphs (a) through (d), are applicable, in addition to specific design requirements of RBAC 23, to any equipment or system as installed in the airplane. This section is a regulation of general requirements and does not supersede any requirements contained in another section of RBAC 23.</p>	<p>Os requisitos desta seção, exceto conforme identificado nos parágrafos de (a) a (d), são aplicáveis, adicionalmente a requisitos específicos de projeto do RBAC 23, a qualquer equipamento ou sistema instalado no avião. Esta seção é um regulamento de requisitos gerais e não substitui qualquer requisito presente em outra seção do RBAC 23.</p>
<p>(a) The airplane equipment and systems must be designed and installed so that:</p>	<p>(a) Os equipamentos e sistemas do avião devem ser projetados e instalados de modo que:</p>
<p>(1) Those required for type certification or by operating rules perform as intended under the airplane operating and environmental conditions, including the indirect effects of lightning strikes.</p>	<p>(1) Aqueles requeridos para a certificação de tipo ou por regras operacionais funcionem conforme pretendido sob as condições operacionais e ambientais do avião, incluindo os efeitos indiretos de impactos por raios.</p>
<p>(2) Any equipment and system does not adversely affect the safety of the airplane or its occupants, or the proper functioning of those covered by paragraph (a)(1) of this section.</p>	<p>(2) Qualquer equipamento e sistema não afete adversamente a segurança operacional do avião ou de seus ocupantes, ou o funcionamento adequado daqueles cobertos pelo parágrafo (a)(1) desta seção.</p>
<p>(b) Minor, major, hazardous, or catastrophic failure condition(s), which occur during Type Inspection Authorization or ANAC flight-certification testing, must have root cause analysis and corrective action.</p>	<p>(b) Condições de falha minor, major, hazardous ou catastróficas que ocorram durante a Autorização de Inspeção de Tipo ou ensaio de certificação em voo da ANAC devem ser submetidas a análise de causa raiz e possuir ação corretiva.</p>
<p>(c) The airplane systems and associated components considered separately and in relation to other systems, must be designed and installed so that:</p>	<p>(c) Os sistemas do avião e componentes associados, considerados separadamente ou em relação a outros sistemas, devem ser projetados e instalados de modo que:</p>
<p>(1) Each catastrophic failure condition is extremely improbable and does not result from a single failure;</p>	<p>(1) Cada condição de falha catastrófica seja extremamente improvável e não seja resultante de uma falha simples;</p>
<p>(2) Each hazardous failure condition is extremely remote; and</p>	<p>(2) Cada condição de falha hazardous seja extremamente remota; e</p>
<p>(3) Each major failure condition is remote.</p>	<p>(3) Cada condição de falha major seja remota.</p>
<p>(d) Information concerning an unsafe system operating condition must be provided in a timely manner to the crew to enable them to</p>	<p>(d) Informações referentes a condições</p>

take appropriate corrective action. An appropriate alert must be provided if immediate pilot awareness and immediate or subsequent corrective action is required. Systems and controls, including indications and annunciations, must be designed to minimize crew errors which could create additional hazards.

inseguras de operação dos sistemas devem ser fornecidas em tempo hábil à tripulação de modo a lhes permitir tomar as ações corretivas adequadas. Deve ser fornecido um alerta apropriado caso sejam necessários o reconhecimento imediato e a ação corretiva imediata ou subsequente. Sistemas e comandos, inclusive indicações e anúncios, devem ser projetados de modo a minimizar erros da tripulação que possam gerar perigos adicionais.

[Doc. No. FAA-2009-0738, 76 FR 75760, Dec. 2, 2011]

23.1310 Power source capacity and distribution.

(a) Each installation whose functioning is required for type certification or under operating rules and that requires a power supply is an "essential load" on the power supply. The power sources and the system must be able to supply the following power loads in probable operating combinations and for probable durations:

(1) Loads connected to the system with the system functioning normally.

(2) Essential loads, after failure of any one prime mover, power converter, or energy storage device.

(3) Essential loads after failure of--

(i) Any one engine on two-engine airplanes; and

(ii) Any two engines on airplanes with three or more engines.

(4) Essential loads for which an alternate source of power is required, after any failure or malfunction in any one power supply system, distribution system, or other utilization system.

(b) In determining compliance with paragraphs (a)(2) and (3) of this section, the power loads may be assumed to be reduced under a monitoring procedure consistent with safety in

23.1310 Capacidade das fontes de energia e do sistema de distribuição.

(a) Cada instalação cujo funcionamento é requerido para certificação de tipo ou por regras de operação e que requeira um fornecimento de energia é uma "carga essencial" do fornecimento de energia. As fontes de energia e o sistema devem ser capazes de fornecer as seguintes cargas nas combinações operacionais prováveis e pelas durações prováveis:

(1) Cargas conectadas ao sistema com o sistema funcionando normalmente.

(2) Cargas essenciais, após a falha de qualquer fonte primária, conversor de energia ou equipamento de acúmulo de energia.

(3) Cargas essenciais após a falha de:

(i) Qualquer motor em aviões com dois motores; e

(ii) Quaisquer dois motores em aviões com três ou mais motores.

(4) Cargas essenciais para as quais uma fonte de energia alternativa é requerida, após qualquer falha ou mau funcionamento em qualquer sistema de alimentação de energia, sistema de distribuição, ou outro sistema de utilização.

(b) Na determinação de cumprimento com os

the kinds of operation authorized. Loads not required in controlled flight need not be considered for the two-engine-inoperative condition on airplanes with three or more engines.

parágrafos (a)(2) e (3) desta seção, as cargas podem ser aceitas de serem reduzidas em um procedimento de monitoramento consistente com a segurança nos tipos de operação autorizada. Cargas não requeridas em voo controlado não precisam ser consideradas para a condição de dois motores inoperantes em aviões com três ou mais motores.

[Doc. No. FAA-2009-0738, 76 FR 75760, Dec. 2, 2011]

Instruments: Installation

23.1311 Electronic display instrument systems.

(a) Electronic display indicators, including those with features that make isolation and independence between powerplant instrument systems impractical, must:

(1) Meet the arrangement and visibility requirements of section 23.1321 of this RBAC.

(2) Be easily legible under all lighting conditions encountered in the cockpit, including direct sunlight, considering the expected electronic display brightness level at the end of an electronic display indicator's useful life. Specific limitations on display system useful life must be contained in the Instructions for Continued Airworthiness required by section 23.1529 of this RBAC.

(3) Not inhibit the primary display of attitude, airspeed, altitude, or powerplant parameters needed by any pilot to set power within established limitations, in any normal mode of operation.

(4) Not inhibit the primary display of engine parameters needed by any pilot to properly set or monitor powerplant limitations during the engine starting mode of operation.

(5) For certification for Instrument Flight Rules (IFR) operations, have an independent magnetic direction indicator and either an independent secondary mechanical altimeter, airspeed indicator, and attitude instrument or an

23.1311 Sistemas de instrumentos com display eletrônico.

(a) Indicadores em display eletrônico, incluindo aqueles com aspectos que fazem isolamento e independência entre instrumentos do grupo motopropulsor impraticáveis, devem:

(1) Atender aos requisitos de arranjo e visibilidade da seção 23.1321 deste RBAC.

(2) Ser facilmente legível sob todas as condições de iluminação encontradas na cabine de comando, incluindo raios solares diretos, considerando o nível de brilho esperado para o display eletrônico no final de sua vida útil. Limitações específicas na vida útil do display eletrônico devem estar contidas nas instruções de aeronavegabilidade continuada requeridas pela seção 23.1529 deste RBAC.

(3) Não inibir a indicação primária de atitude, velocidade no ar, altitude ou parâmetros do grupo motopropulsor necessária a qualquer piloto para ajustar a potência dentro das limitações estabelecidas, em qualquer modo normal de operação.

(4) Não inibir a indicação primária de parâmetros de motor necessária a qualquer piloto para ajustar ou monitorar adequadamente limitações do grupo motopropulsor durante o modo de operação de partida do motor.

(5) Para certificação para operações seguindo Regras do Voo por Instrumentos (IFR), ter um indicador de direção magnética independente e

electronic display parameters for the altitude, airspeed, and attitude that are independent from the airplane's primary electrical power system. These secondary instruments may be installed in panel positions that are displaced from the primary positions specified by paragraph 23.1321(d) of this RBAC, but must be located where they meet the pilot's visibility requirements of paragraph 23.1321(a) of this RBAC.

(6) Incorporate sensory cues that provide a quick glance sense of rate and, where appropriate, trend information to the parameter being displayed to the pilot.

(7) Incorporate equivalent visual displays of the instrument markings required by section 23.1541 through 23.1553 of this RBAC, or visual displays that alert the pilot to abnormal operational values or approaches to established limitation values, for each parameter required to be displayed by this part.

(b) The electronic display indicators, including their systems and installations, and considering other airplane systems, must be designed so that one display of information essential for continued safe flight and landing will be available within one second to the crew by a single pilot action or by automatic means for continued safe operation, after any single failure or probable combination of failures.

(c) As used in this section, "instrument" includes devices that are physically contained in one unit, and devices that are composed of two or more physically separate units or components connected together (such as a remote indicating gyroscopic direction indicator that includes a magnetic sensing element, a gyroscopic unit, an amplifier, and an indicator connected together). As used in this section, "primary" display refers to the display of a parameter that is located in the instrument panel such that the pilot looks at it first when wanting to view that parameter.

ou um altímetro, um indicador de velocidade no ar e um instrumento de atitude mecânicos secundários independentes ou um display eletrônico para os parâmetros de altitude, velocidade no ar e atitude que sejam independentes do sistema de energia elétrica primário do avião. Esses instrumentos secundários podem ser instalados em posições no painel que sejam deslocadas das posições primárias especificadas pelo parágrafo 23.1321(d) deste RBAC, mas devem estar localizados onde cumpram com os requisitos de visibilidade dos pilotos do parágrafo 23.1321(a) deste RBAC.

(6) Incorporar estímulos sensoriais que forneçam uma sensação de relance de taxa e, onde apropriado, informação de tendência para o parâmetro que estiverem sendo apresentados ao piloto.

(7) Incorporar indicações visuais das marcações dos instrumentos, requeridos pelas seções 23.1541 à 23.1553 deste RBAC, ou indicações visuais que alertem o piloto para valores operacionais anormais ou aproximações aos valores de limitação estabelecidos para cada parâmetro requerido para ser exibido por este regulamento.

(b) Os indicadores em display eletrônico, incluindo seus sistemas e instalações, e considerando outros sistemas do avião, devem ser projetados de forma que uma exibição de informação essencial para a continuação segura do voo e pouso estará disponível dentro de um segundo para a tripulação por uma única ação do piloto ou por meio automático para operação segura continuada, após qualquer falha simples ou combinação provável de falhas.

(c) Como usado nessa seção, "instrumento" inclui dispositivos que estão fisicamente contidos em uma unidade e dispositivos que são compostos de duas ou mais unidades separadas fisicamente ou componentes conectados juntos (tal como um indicador de direção giroscópios remotos, que inclui

	elemento sensor magnético, uma unidade giroscópica, um amplificador e um indicador conectados juntos). Como usado nessa seção, indicação “primária” se refere à indicação de parâmetro que está localizado no painel de instrumentos de forma que o piloto olhe para ele primeiro quando quiser visualizar este parâmetro.
--	--

[Doc. No. 27806, 61 FR 5168, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75760, Dec. 2, 2011]

§ 23.1321 Arrangement and visibility.

(a) Each flight, navigation, and powerplant instrument for use by any required pilot during takeoff, initial climb, final approach, and landing must be located so that any pilot seated at the controls can monitor the airplane's flight path and these instruments with minimum head and eye movement. The powerplant instruments for these flight conditions are those needed to set power within powerplant limitations.

(b) For each multiengine airplane, identical powerplant instruments must be located so as to prevent confusion as to which engine each instrument relates.

(c) Instrument panel vibration may not damage, or impair the accuracy of, any instrument.

(d) For each airplane, the flight instruments required by §23.1303, and, as applicable, by the operating rules of this chapter, must be grouped on the instrument panel and centered as nearly as practicable about the vertical plane of each required pilot's forward vision. In addition:

(1) The instrument that most effectively indicates the attitude must be on the panel in the top center position;

(2) The instrument that most effectively indicates airspeed must be adjacent to and directly to the left of the instrument in the top center position;

(3) The instrument that most effectively indicates altitude must be adjacent to and directly to the right of the instrument in the top center position;

(4) The instrument that most effectively indicates direction of flight, other than the magnetic direction indicator required by §23.1303(c), must be adjacent to and directly below the instrument in the top center position; and

(5) Electronic display indicators may be used for compliance with paragraphs (d)(1) through (d)(4) of this section when such displays comply with requirements in §23.1311.

(e) If a visual indicator is provided to indicate malfunction of an instrument, it must be effective under all probable cockpit lighting conditions.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-14, 38 FR 31824, Nov. 19,

1973; Amdt. 23–20, 42 FR 36968, July 18, 1977; Amdt. 23–41, 55 FR 43310, Oct. 26, 1990; 55 FR 46888, Nov. 7, 1990; Amdt. 23–49, 61 FR 5168, Feb. 9, 1996]

§ 23.1322 Warning, caution, and advisory lights.

If warning, caution, or advisory lights are installed in the cockpit, they must, unless otherwise approved by the Administrator, be—

- (a) Red, for warning lights (lights indicating a hazard which may require immediate corrective action);
- (b) Amber, for caution lights (lights indicating the possible need for future corrective action);
- (c) Green, for safe operation lights; and
- (d) Any other color, including white, for lights not described in paragraphs (a) through (c) of this section, provided the color differs sufficiently from the colors prescribed in paragraphs (a) through (c) of this section to avoid possible confusion.
- (e) Effective under all probable cockpit lighting conditions.

[Amdt. 23–17, 41 FR 55465, Dec. 20, 1976, as amended by Amdt. 23–43, 58 FR 18976, Apr. 9, 1993]

23.1323 Airspeed indicating system.	23.1323 Airspeed indicating system.
<p>(a) Each airspeed indicating instrument must be calibrated to indicate true airspeed (at sea level with a standard atmosphere) with a minimum practicable instrument calibration error when the corresponding pitot and static pressures are applied.</p> <p>(b) Each airspeed system must be calibrated in flight to determine the system error. The system error, including position error, but excluding the airspeed indicator instrument calibration error, may not exceed three percent of the calibrated airspeed or five knots (9,25 km/h), whichever is greater, throughout the following speed ranges:</p> <p>(1) 1,3 V_{S1} to V_{MO}/M_{MO} or V_{NE}, whichever is appropriate with flaps retracted.</p> <p>(2) 1.3 V_{S1} to V_{FE} with flaps extended.</p> <p>(c) The design and installation of each airspeed indicating system must provide positive</p>	<p>(a) Cada instrumento de indicação de velocidade no ar deve ser calibrado de modo a indicar a velocidade verdadeira (ao nível do mar, em atmosfera padrão) com o mínimo erro de calibração atingível quando forem aplicadas as pressões correspondentes no(s) tubo(s) de pitot e tomada(s) de pressão estática.</p> <p>(b) Cada sistema de velocidade no ar deve ser calibrado em voo de modo que seja determinado o erro do sistema. O erro do sistema, incluindo o erro de posição, porém desconsiderando o erro de calibração do instrumento de indicação de velocidade no ar, não pode exceder 3% da velocidade calibrada ou 5 kt (9,25 km/h), o que for maior, ao longo das seguintes faixas de velocidades:</p> <p>(1) De 1,3 vezes a V_{S1} até a V_{MO}/M_{MO} ou V_{NE}, a que for apropriada, com flapes recolhidos.</p> <p>(2) De 1,3 vezes a V_{S1} até a V_{FE} com flapes</p>

<p>drainage of moisture from the pitot static plumbing.</p> <p>(d) If certification for instrument flight rules or flight in icing conditions is requested, each airspeed system must have a heated pitot tube or an equivalent means of preventing malfunction due to icing.</p> <p>(e) In addition, for normal, utility, and acrobatic category multiengine jets of more than 6.000 pounds (2.722 kg) maximum weight and commuter category airplanes, each system must be calibrated to determine the system error during the accelerate-takeoff ground run. The ground run calibration must be determined:</p> <p>(1) From 0,8 of the minimum value of V_1 to the maximum value of V_2, considering the approved ranges of altitude and weight; and</p> <p>(2) The ground run calibration must be determined assuming an engine failure at the minimum value of V_1.</p> <p>(f) For commuter category airplanes, where duplicate airspeed indicators are required, their respective pitot tubes must be far enough apart to avoid damage to both tubes in a collision with a bird.</p>	<p>estendidos.</p> <p>(c) O projeto e a instalação de cada sistema de indicação de velocidade no ar devem permitir a drenagem eficaz da umidade da tubulação do sistema pitot/estático.</p> <p>(d) Caso seja solicitada certificação para voo IFR ou voo em condições de formação de gelo, cada sistema de velocidade no ar deve ter um tubo de pitot aquecido ou uma forma equivalente de evitar o mau funcionamento decorrente da formação de gelo.</p> <p>(e) Adicionalmente, para aviões a jato multimotores de mais de 6.000 libras (2.722 kg) de peso máximo, das categorias normal, utilidade e acrobática e aviões da categoria transporte regional, cada sistema deve ser calibrado de modo a determinar o erro do sistema durante a corrida de decolagem acelerada em solo. A calibração para corrida em solo deve ser determinada:</p> <p>(1) De 0,8 vezes o valor mínimo de V_1 até o valor máximo de V_2, considerando os valores aprovados para altitude e peso; e</p> <p>(2) A calibração para corrida em solo deve ser obtida assumindo uma falha de motor no valor mínimo de V_1.</p> <p>(f) Para aviões da categoria transporte regional, onde for requerida a duplicação do indicador de velocidade no ar, os respectivos tubos de pitot devem estar distantes um do outro o suficiente para evitar danos a ambos os tubos quando da colisão com um pássaro.</p>
--	--

[Amdt. 23-20, 42 FR 36968, July 18, 1977, as amended by Amdt. 23-34, 52 FR 1834, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23-42, 56 FR 354, Jan. 3, 1991; Amdt. 23-49, 61 FR 5168, Feb. 9, 1996; Amdt. 23-62, 76 FR 75761, Dec. 2, 2011]

§ 23.1325 Static pressure system.

(a) Each instrument provided with static pressure case connections must be so vented that the influence of airplane speed, the opening and closing of windows, airflow variations, moisture, or other foreign matter will least affect the accuracy of the instruments except as noted in paragraph (b)(3) of this section.

(b) If a static pressure system is necessary for the functioning of instruments, systems, or devices, it must comply with the provisions of paragraphs (b)(1) through (3) of this section.

(1) The design and installation of a static pressure system must be such that—

(i) Positive drainage of moisture is provided;

(ii) Chafing of the tubing, and excessive distortion or restriction at bends in the tubing, is avoided; and

(iii) The materials used are durable, suitable for the purpose intended, and protected against corrosion.

(2) A proof test must be conducted to demonstrate the integrity of the static pressure system in the following manner:

(i) Unpressurized airplanes. Evacuate the static pressure system to a pressure differential of approximately 1 inch of mercury or to a reading on the altimeter, 1,000 feet above the aircraft elevation at the time of the test. Without additional pumping for a period of 1 minute, the loss of indicated altitude must not exceed 100 feet on the altimeter.

(ii) Pressurized airplanes. Evacuate the static pressure system until a pressure differential equivalent to the maximum cabin pressure differential for which the airplane is type certificated is achieved. Without additional pumping for a period of 1 minute, the loss of indicated altitude must not exceed 2 percent of the equivalent altitude of the maximum cabin differential pressure or 100 feet, whichever is greater.

(3) If a static pressure system is provided for any instrument, device, or system required by the operating rules of this chapter, each static pressure port must be designed or located in such a manner that the correlation between air pressure in the static pressure system and true ambient atmospheric static pressure is not altered when the airplane encounters icing conditions. An antiicing means or an alternate source of static pressure may be used in showing compliance with this requirement. If the reading of the altimeter, when on the alternate static pressure system differs from the reading of the altimeter when on the primary static system by more than 50 feet, a correction card must be provided for the alternate static system.

(c) Except as provided in paragraph (d) of this section, if the static pressure system incorporates both a primary and an alternate static pressure source, the means for selecting one or the other source must be designed so that—

(1) When either source is selected, the other is blocked off; and

(2) Both sources cannot be blocked off simultaneously.

(d) For unpressurized airplanes, paragraph (c)(1) of this section does not apply if it can be demonstrated that the static pressure system calibration, when either static pressure source is selected, is not changed by the other static pressure source being open or blocked.

(e) Each static pressure system must be calibrated in flight to determine the system error. The

system error, in indicated pressure altitude, at sea-level, with a standard atmosphere, excluding instrument calibration error, may not exceed ± 30 feet per 100 knot speed for the appropriate configuration in the speed range between $1.3 V_{S0}$ with flaps extended, and $1.8 V_{S1}$ with flaps retracted. However, the error need not be less than 30 feet.

(f) [Reserved]

(g) For airplanes prohibited from flight in instrument meteorological or icing conditions, in accordance with §23.1559(b) of this part, paragraph (b)(3) of this section does not apply.

[Amdt. 23–1, 30 FR 8261, June 29, 1965, as amended by Amdt. 23–6, 32 FR 7586, May 24, 1967; 32 FR 13505, Sept. 27, 1967; 32 FR 13714, Sept. 30, 1967; Amdt. 23–20, 42 FR 36968, July 18, 1977; Amdt. 23–34, 52 FR 1834, Jan. 15, 1987; Amdt. 23–42, 56 FR 354, Jan. 3, 1991; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996; Amdt. 23–50, 61 FR 5192, Feb. 9, 1996]

§ 23.1326 Pitot heat indication systems.

If a flight instrument pitot heating system is installed to meet the requirements specified in §23.1323(d), an indication system must be provided to indicate to the flight crew when that pitot heating system is not operating. The indication system must comply with the following requirements:

(a) The indication provided must incorporate an amber light that is in clear view of a flightcrew member.

(b) The indication provided must be designed to alert the flight crew if either of the following conditions exist:

(1) The pitot heating system is switched “off.”

(2) The pitot heating system is switched “on” and any pitot tube heating element is inoperative.

[Doc. No. 27806, 61 FR 5169, Feb. 9, 1996]

§ 23.1327 Magnetic direction indicator.

(a) Except as provided in paragraph (b) of this section—

(1) Each magnetic direction indicator must be installed so that its accuracy is not excessively affected by the airplane's vibration or magnetic fields; and

(2) The compensated installation may not have a deviation in level flight, greater than ten degrees on any heading.

(b) A magnetic nonstabilized direction indicator may deviate more than ten degrees due to the operation of electrically powered systems such as electrically heated windshields if either a magnetic stabilized direction indicator, which does not have a deviation in level flight greater than ten degrees on any heading, or a gyroscopic direction indicator, is installed. Deviations of a magnetic nonstabilized direction indicator of more than 10 degrees must be placarded in accordance

with §23.1547(e).

[Amdt. 23–20, 42 FR 36969, July 18, 1977]

§ 23.1329 Automatic pilot system.

If an automatic pilot system is installed, it must meet the following:

(a) Each system must be designed so that the automatic pilot can—

(1) Be quickly and positively disengaged by the pilots to prevent it from interfering with their control of the airplane; or

(2) Be sufficiently overpowered by one pilot to let him control the airplane.

(b) If the provisions of paragraph (a)(1) of this section are applied, the quick release (emergency) control must be located on the control wheel (both control wheels if the airplane can be operated from either pilot seat) on the side opposite the throttles, or on the stick control, (both stick controls, if the airplane can be operated from either pilot seat) such that it can be operated without moving the hand from its normal position on the control.

(c) Unless there is automatic synchronization, each system must have a means to readily indicate to the pilot the alignment of the actuating device in relation to the control system it operates.

(d) Each manually operated control for the system operation must be readily accessible to the pilot. Each control must operate in the same plane and sense of motion as specified in §23.779 for cockpit controls. The direction of motion must be plainly indicated on or near each control.

(e) Each system must be designed and adjusted so that, within the range of adjustment available to the pilot, it cannot produce hazardous loads on the airplane or create hazardous deviations in the flight path, under any flight condition appropriate to its use, either during normal operation or in the event of a malfunction, assuming that corrective action begins within a reasonable period of time.

(f) Each system must be designed so that a single malfunction will not produce a hardover signal in more than one control axis. If the automatic pilot integrates signals from auxiliary controls or furnishes signals for operation of other equipment, positive interlocks and sequencing of engagement to prevent improper operation are required.

(g) There must be protection against adverse interaction of integrated components, resulting from a malfunction.

(h) If the automatic pilot system can be coupled to airborne navigation equipment, means must be provided to indicate to the flight crew the current mode of operation. Selector switch position is not acceptable as a means of indication.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–23, 43 FR 50593, Oct. 30, 1978; Amdt. 23–43, 58 FR 18976, Apr. 9, 1993; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

23.1331 Instruments using a power source.

For each instrument that uses a power source, the following apply:

(a) Each instrument must have an integral visual power annunciator or separate power indicator to indicate when power is not adequate to sustain proper instrument performance. If a separate indicator is used, it must be located so that the pilot using the instruments can monitor the indicator with minimum head and eye movement. The power must be sensed at or near the point where it enters the instrument. For electric and vacuum/pressure instruments, the power is considered to be adequate when the voltage or the vacuum/pressure, respectively, is within approved limits.

(b) The installation and power supply systems must be designed so that:

(1) The failure of one instrument will not interfere with the proper supply of energy to the remaining instrument; and

(2) The failure of the energy supply from one source will not interfere with the proper supply of energy from any other source.

(c) For certification for Instrument Flight Rules (IFR) operations and for the heading, altitude, airspeed, and attitude, there must be at least:

(1) Two independent sources of power (not driven by the same engine on multiengine airplanes), and a manual or an automatic means to select each power source; or

(2) A separate display of parameters for heading, altitude, airspeed, and attitude that has a power source independent from the airplane's primary electrical power system.

23.1331 Instrumentos utilizando uma fonte de energia.

Para cada instrumento que use uma fonte de energia, o seguinte se aplica:

(a) Cada instrumento deve ter um anunciador visual de energia integrado ou indicador de energia para indicar quando a energia não é adequada para manter o desempenho adequado do instrumento. Se um indicador separado é usado, deve ser localizado de maneira que o piloto usando os instrumentos possa monitorar o indicador com mínimo de movimento de cabeça e olhos. A energia deve ser medida no ou próximo ao ponto em que ela entra no instrumento. Para instrumentos elétricos e de pressão/vácuo, a energia é considerada adequada quando a tensão ou vácuo/pressão, respectivamente, está dentro dos limites aprovados.

(b) A instalação e os sistemas de fornecimento de energia devem ser projetados para que:

(1) A falha de um instrumento não interferirá no adequado fornecimento de energia ao instrumento remanescente; e

(2) A falha de fornecimento de energia de uma fonte não interferirá no adequado fornecimento de energia de qualquer outra fonte.

(c) Para certificação para operação de acordo com as regras de voo por instrumentos e para a proa, altitude, velocidade do ar e atitude, deve haver ao menos:

(1) Duas fontes independentes de energia (não movidas pelo mesmo motor em aviões multimotores) e um meio manual ou automático de selecionar cada fonte de energia; ou

(2) Um display de parâmetros separado para proa, altitude, velocidade do ar e atitude que tenha uma fonte de energia independente do sistema de energia elétrica primário do avião.

[Doc. No. 26344, 58 FR 18976, Apr. 9, 1993, as amended by Amdt. 23-62, 76 FR 75761, Dec. 2, 2011]

§ 23.1335 Flight director systems.

If a flight director system is installed, means must be provided to indicate to the flight crew its current mode of operation. Selector switch position is not acceptable as a means of indication.

[Amdt. 23-20, 42 FR 36969, July 18, 1977]

§ 23.1337 Powerplant instruments installation.

(a) Instruments and instrument lines. (1) Each powerplant and auxiliary power unit instrument line must meet the requirements of §23.993.

(2) Each line carrying flammable fluids under pressure must—

(i) Have restricting orifices or other safety devices at the source of pressure to prevent the escape of excessive fluid if the line fails; and

(ii) Be installed and located so that the escape of fluids would not create a hazard.

(3) Each powerplant and auxiliary power unit instrument that utilizes flammable fluids must be installed and located so that the escape of fluid would not create a hazard.

(b) Fuel quantity indication. There must be a means to indicate to the flightcrew members the quantity of usable fuel in each tank during flight. An indicator calibrated in appropriate units and clearly marked to indicate those units must be used. In addition:

(1) Each fuel quantity indicator must be calibrated to read “zero” during level flight when the quantity of fuel remaining in the tank is equal to the unusable fuel supply determined under §23.959(a);

(2) Each exposed sight gauge used as a fuel quantity indicator must be protected against damage;

(3) Each sight gauge that forms a trap in which water can collect and freeze must have means to allow drainage on the ground;

(4) There must be a means to indicate the amount of usable fuel in each tank when the airplane is on the ground (such as by a stick gauge);

(5) Tanks with interconnected outlets and airspaces may be considered as one tank and need not have separate indicators; and

(6) No fuel quantity indicator is required for an auxiliary tank that is used only to transfer fuel to other tanks if the relative size of the tank, the rate of fuel transfer, and operating instructions are adequate to—

- (i) Guard against overflow; and
- (ii) Give the flight crewmembers prompt warning if transfer is not proceeding as planned.
- (c) Fuel flowmeter system. If a fuel flowmeter system is installed, each metering component must have a means to by-pass the fuel supply if malfunctioning of that component severely restricts fuel flow.
- (d) Oil quantity indicator. There must be a means to indicate the quantity of oil in each tank—
 - (1) On the ground (such as by a stick gauge); and
 - (2) In flight, to the flight crew members, if there is an oil transfer system or a reserve oil supply system.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13096, Aug. 13, 1969; Amdt. 23–18, 42 FR 15042, Mar. 17, 1977; Amdt. 23–43, 58 FR 18976, Apr. 9, 1993; Amdt. 23–51, 61 FR 5138, Feb. 9, 1996; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

Electrical Systems and Equipment

§ 23.1351 General.

- (a) Electrical system capacity. Each electrical system must be adequate for the intended use. In addition—
 - (1) Electric power sources, their transmission cables, and their associated control and protective devices, must be able to furnish the required power at the proper voltage to each load circuit essential for safe operation; and
 - (2) Compliance with paragraph (a)(1) of this section must be shown as follows—
 - (i) For normal, utility, and acrobatic category airplanes, by an electrical load analysis or by electrical measurements that account for the electrical loads applied to the electrical system in probable combinations and for probable durations; and
 - (ii) For commuter category airplanes, by an electrical load analysis that accounts for the electrical loads applied to the electrical system in probable combinations and for probable durations.
- (b) Function. For each electrical system, the following apply:
 - (1) Each system, when installed, must be—
 - (i) Free from hazards in itself, in its method of operation, and in its effects on other parts of the airplane;
 - (ii) Protected from fuel, oil, water, other detrimental substances, and mechanical damage; and
 - (iii) So designed that the risk of electrical shock to crew, passengers, and ground personnel is

reduced to a minimum.

(2) Electric power sources must function properly when connected in combination or independently.

(3) No failure or malfunction of any electric power source may impair the ability of any remaining source to supply load circuits essential for safe operation.

(4) In addition, for commuter category airplanes, the following apply:

(i) Each system must be designed so that essential load circuits can be supplied in the event of reasonably probable faults or open circuits including faults in heavy current carrying cables;

(ii) A means must be accessible in flight to the flight crewmembers for the individual and collective disconnection of the electrical power sources from the system;

(iii) The system must be designed so that voltage and frequency, if applicable, at the terminals of all essential load equipment can be maintained within the limits for which the equipment is designed during any probable operating conditions;

(iv) If two independent sources of electrical power for particular equipment or systems are required, their electrical energy supply must be ensured by means such as duplicate electrical equipment, throwover switching, or multichannel or loop circuits separately routed; and

(v) For the purpose of complying with paragraph (b)(5) of this section, the distribution system includes the distribution busses, their associated feeders, and each control and protective device.

(c) Generating system. There must be at least one generator/alternator if the electrical system supplies power to load circuits essential for safe operation. In addition—

(1) Each generator/alternator must be able to deliver its continuous rated power, or such power as is limited by its regulation system.

(2) Generator/alternator voltage control equipment must be able to dependably regulate the generator/alternator output within rated limits.

(3) Automatic means must be provided to prevent damage to any generator/alternator and adverse effects on the airplane electrical system due to reverse current. A means must also be provided to disconnect each generator/alternator from the battery and other generators/alternators.

(4) There must be a means to give immediate warning to the flight crew of a failure of any generator/alternator.

(5) Each generator/alternator must have an overvoltage control designed and installed to prevent damage to the electrical system, or to equipment supplied by the electrical system that could result if that generator/alternator were to develop an overvoltage condition.

(d) Instruments. A means must exist to indicate to appropriate flight crewmembers the electric power system quantities essential for safe operation.

(1) For normal, utility, and acrobatic category airplanes with direct current systems, an ammeter that can be switched into each generator feeder may be used and, if only one generator exists, the ammeter may be in the battery feeder.

(2) For commuter category airplanes, the essential electric power system quantities include the voltage and current supplied by each generator.

(e) Fire resistance. Electrical equipment must be so designed and installed that in the event of a fire in the engine compartment, during which the surface of the firewall adjacent to the fire is heated to 2,000 °F for 5 minutes or to a lesser temperature substantiated by the applicant, the equipment essential to continued safe operation and located behind the firewall will function satisfactorily and will not create an additional fire hazard.

(f) External power. If provisions are made for connecting external power to the airplane, and that external power can be electrically connected to equipment other than that used for engine starting, means must be provided to ensure that no external power supply having a reverse polarity, or a reverse phase sequence, can supply power to the airplane's electrical system. The external power connection must be located so that its use will not result in a hazard to the airplane or ground personnel.

(g) It must be shown by analysis, tests, or both, that the airplane can be operated safely in VFR conditions, for a period of not less than five minutes, with the normal electrical power (electrical power sources excluding the battery and any other standby electrical sources) inoperative, with critical type fuel (from the standpoint of flameout and restart capability), and with the airplane initially at the maximum certificated altitude. Parts of the electrical system may remain on if—

(1) A single malfunction, including a wire bundle or junction box fire, cannot result in loss of the part turned off and the part turned on; and

(2) The parts turned on are electrically and mechanically isolated from the parts turned off.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13096, Aug. 13, 1969; Amdt. 23–14, 38 FR 31824, Nov. 19, 1973; Amdt. 23–17, 41 FR 55465, Dec. 20, 1976; Amdt. 23–20, 42 FR 36969, July 18, 1977; Amdt. 23–34, 52 FR 1834, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23–43, 58 FR 18976, Apr. 9, 1993; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

<p>23.1353 Storage battery design and installation.</p> <p>(a) Each storage battery must be designed and installed as prescribed in this section.</p> <p>(b) Safe cell temperatures and pressures must be maintained during any probable charging and discharging condition. No uncontrolled increase in cell temperature may result when the battery is recharged (after previous complete discharge):</p>	<p>23.1353 Projeto e instalação de baterias recarregáveis.</p> <p>(a) Cada bateria recarregável deve ser projetada e instalada como determinado nesta seção.</p> <p>(b) Temperaturas e pressões seguras das células devem ser mantidas durante qualquer condição provável de carregamento ou descarregamento. Nenhum acréscimo descontrolado na temperatura da célula é admissível quando a bateria é recarregada (após uma prévia</p>
--	---

<p>(1) At maximum regulated voltage or power;</p> <p>(2) During a flight of maximum duration; and</p> <p>(3) Under the most adverse cooling condition likely to occur in service.</p> <p>(c) Compliance with paragraph (b) of this section must be shown by tests unless experience with similar batteries and installations has shown that maintaining safe cell temperatures and pressures presents no problem.</p> <p>(d) No explosive or toxic gases emitted by any battery in normal operation, or as the result of any probable malfunction in the charging system or battery installation, may accumulate in hazardous quantities within the airplane.</p> <p>(e) No corrosive fluids or gases that may escape from the battery may damage surrounding structures or adjacent essential equipment.</p> <p>(f) Each nickel cadmium battery installation capable of being used to start an engine or auxiliary power unit must have provisions to prevent any hazardous effect on structure or essential systems that may be caused by the maximum amount of heat the battery can generate during a short circuit of the battery or of its individual cells.</p> <p>(g) Nickel cadmium battery installations capable of being used to start an engine or auxiliary power unit must have:</p> <p>(1) A system to control the charging rate of the battery automatically so as to prevent battery overheating;</p> <p>(2) A battery temperature sensing and over-temperature warning system with a means for disconnecting the battery from its charging source in the event of an over-temperature condition; or</p> <p>(3) A battery failure sensing and warning</p>	<p>descarga completa):</p> <p>(1) Na máxima tensão regulada ou potência;</p> <p>(2) Durante um voo de máxima duração; e</p> <p>(3) Sob a condição mais adversa de refrigeração provável de ocorrer em serviço.</p> <p>(c) Cumprimento com o parágrafo (b) desta seção deve ser demonstrado por ensaios a menos que experiência com baterias e instalações similares tenha demonstrado que não apresentam problemas em manter temperaturas e pressões seguras da célula.</p> <p>(d) Nenhum gás explosivo ou tóxico emitido por qualquer bateria em operação normal, ou como resultado de qualquer provável mau funcionamento no sistema de carregamento ou instalação da bateria, pode acumular em quantidades perigosas dentro do avião.</p> <p>(e) Nenhum fluido ou gás que possa escapar da bateria pode danificar estruturas ao seu redor ou equipamento essencial adjacente.</p> <p>(f) Cada instalação de bateria de níquel cádmio capaz de ser utilizado para partir um motor ou unidade auxiliar de potência deve ter provisões para evitar qualquer efeito hazardous na estrutura ou sistemas essenciais que possa ser causado pela máxima quantidade de calor que a bateria pode gerar durante um curto circuito da bateria ou de suas células individuais.</p> <p>(g) Instalações de baterias de níquel cádmio capazes de serem usadas para partir um motor ou unidade auxiliar de potência devem ter:</p> <p>(1) Um sistema para controlar automaticamente o regime de carregamento da bateria para evitar sobreaquecimento da bateria;</p> <p>(2) Um sistema de sensoriamento de temperatura e alarme de sobre temperatura com um meio para desconexão da bateria de sua fonte de carregamento no evento de uma</p>
---	---

<p>system with a means for disconnecting the battery from its charging source in the event of battery failure.</p> <p>(h)(1) In the event of a complete loss of the primary electrical power generating system, the battery must be capable of providing electrical power to those loads that are essential to continued safe flight and landing for:</p> <p>(i) At least 30 minutes for airplanes that are certificated with a maximum altitude of 25.000 feet or less; and</p> <p>(ii) At least 60 minutes for airplanes that are certificated with a maximum altitude over 25.000 feet.</p> <p>(2) The time period includes the time to recognize the loss of generated power and to take appropriate load shedding action.</p>	<p>condição de sobre temperatura; ou</p> <p>(3) Um sistema de sensoriamento e alarme de falha da bateria com um meio de desconectar a bateria de sua fonte de carregamento no evento de falha da bateria.</p> <p>(h) (1) No evento de uma perda total do sistema de primário de geração de energia elétrica, a bateria deve ser capaz de fornecer energia elétrica para aquelas cargas que são essenciais para a continuação segura do voo e pouso por:</p> <p>(i) ao menos 30 minutos para aviões que são certificados com altitude máxima de 25.000 pés ou menos; e</p> <p>(ii) ao menos 60 minutos para aviões que são certificados com uma altitude máxima acima de 25.000 pés.</p> <p>(2) O período de tempo inclui o tempo para reconhecer a perda da energia gerada e tomar ações adequadas de corte de carga.</p>
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-20, 42 FR 36969, July 18, 1977; Amdt. 23-21, 43 FR 2319, Jan. 16, 1978; Amdt. 23-49, 61 FR 5169, Feb. 9, 1996; Amdt. 23-62, 76 FR 75761, Dec. 2, 2011]

§ 23.1357 Circuit protective devices.

(a) Protective devices, such as fuses or circuit breakers, must be installed in all electrical circuits other than—

(1) Main circuits of starter motors used during starting only; and

(2) Circuits in which no hazard is presented by their omission.

(b) A protective device for a circuit essential to flight safety may not be used to protect any other circuit.

(c) Each resettable circuit protective device (“trip free” device in which the tripping mechanism cannot be overridden by the operating control) must be designed so that—

(1) A manual operation is required to restore service after tripping; and

(2) If an overload or circuit fault exists, the device will open the circuit regardless of the position of the operating control.

(d) If the ability to reset a circuit breaker or replace a fuse is essential to safety in flight, that circuit breaker or fuse must be so located and identified that it can be readily reset or replaced in flight.

(e) For fuses identified as replaceable in flight—

(1) There must be one spare of each rating or 50 percent spare fuses of each rating, whichever is greater; and

(2) The spare fuse(s) must be readily accessible to any required pilot.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–20, 42 FR 36969, July 18, 1977]; Amdt. 23–43, 58 FR 18976, Apr. 9, 1993

§ 23.1359 Electrical system fire protection.

(a) Each component of the electrical system must meet the applicable fire protection requirements of §§23.863 and 23.1182.

(b) Electrical cables, terminals, and equipment in designated fire zones that are used during emergency procedures must be fire-resistant.

(c) Insulation on electrical wire and electrical cable must be self-extinguishing when tested at an angle of 60 degrees in accordance with the applicable portions of appendix F of this part, or other approved equivalent methods. The average burn length must not exceed 3 inches (76 mm) and the average flame time after removal of the flame source must not exceed 30 seconds. Drippings from the test specimen must not continue to flame for more than an average of 3 seconds after falling.

[Doc. No. 27806, 61 FR 5169, Feb. 9, 1996]

§ 23.1361 Master switch arrangement.

(a) There must be a master switch arrangement to allow ready disconnection of each electric power source from power distribution systems, except as provided in paragraph (b) of this section. The point of disconnection must be adjacent to the sources controlled by the switch arrangement. If separate switches are incorporated into the master switch arrangement, a means must be provided for the switch arrangement to be operated by one hand with a single movement.

(b) Load circuits may be connected so that they remain energized when the master switch is open, if the circuits are isolated, or physically shielded, to prevent their igniting flammable fluids or vapors that might be liberated by the leakage or rupture of any flammable fluid system; and

(1) The circuits are required for continued operation of the engine; or

(2) The circuits are protected by circuit protective devices with a rating of five amperes or less adjacent to the electric power source.

(3) In addition, two or more circuits installed in accordance with the requirements of paragraph (b)(2) of this section must not be used to supply a load of more than five amperes.

(c) The master switch or its controls must be so installed that the switch is easily discernible and accessible to a crewmember.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–20, 42 FR 36969, July 18, 1977; Amdt. 23–43, 58 FR 18977, Apr. 9, 1993; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

§ 23.1365 Electric cables and equipment.

(a) Each electric connecting cable must be of adequate capacity.

(b) Any equipment that is associated with any electrical cable installation and that would overheat in the event of circuit overload or fault must be flame resistant. That equipment and the electrical cables must not emit dangerous quantities of toxic fumes.

(c) Main power cables (including generator cables) in the fuselage must be designed to allow a reasonable degree of deformation and stretching without failure and must—

(1) Be separated from flammable fluid lines; or

(2) Be shrouded by means of electrically insulated flexible conduit, or equivalent, which is in addition to the normal cable insulation.

(d) Means of identification must be provided for electrical cables, terminals, and connectors.

(e) Electrical cables must be installed such that the risk of mechanical damage and/or damage caused by fluids vapors, or sources of heat, is minimized.

(f) Where a cable cannot be protected by a circuit protection device or other overload protection, it must not cause a fire hazard under fault conditions.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–14, 38 FR 31824, Nov. 19, 1973; Amdt. 23–43, 58 FR 18977, Apr. 9, 1993; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

§ 23.1367 Switches.

Each switch must be—

(a) Able to carry its rated current;

(b) Constructed with enough distance or insulating material between current carrying parts and the housing so that vibration in flight will not cause shorting;

(c) Accessible to appropriate flight crewmembers; and

(d) Labeled as to operation and the circuit controlled.

Lights

§ 23.1381 Instrument lights.

The instrument lights must—

- (a) Make each instrument and control easily readable and discernible;
- (b) Be installed so that their direct rays, and rays reflected from the windshield or other surface, are shielded from the pilot's eyes; and
- (c) Have enough distance or insulating material between current carrying parts and the housing so that vibration in flight will not cause shorting.

A cabin dome light is not an instrument light.

§ 23.1383 Taxi and landing lights.

Each taxi and landing light must be designed and installed so that:

- (a) No dangerous glare is visible to the pilots.
- (b) The pilot is not seriously affected by halation.
- (c) It provides enough light for night operations.
- (d) It does not cause a fire hazard in any configuration.

[Doc. No. 27806, 61 FR 5169, Feb. 9, 1996]

§ 23.1385 Position light system installation.

- (a) General. Each part of each position light system must meet the applicable requirements of this section and each system as a whole must meet the requirements of §§23.1387 through 23.1397.
- (b) Left and right position lights. Left and right position lights must consist of a red and a green light spaced laterally as far apart as practicable and installed on the airplane such that, with the airplane in the normal flying position, the red light is on the left side and the green light is on the right side.
- (c) Rear position light. The rear position light must be a white light mounted as far aft as practicable on the tail or on each wing tip.
- (d) Light covers and color filters. Each light cover or color filter must be at least flame resistant and may not change color or shape or lose any appreciable light transmission during normal use.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–17, 41 FR 55465, Dec. 20, 1976; Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1387 Position light system dihedral angles.

(a) Except as provided in paragraph (e) of this section, each position light must, as installed, show unbroken light within the dihedral angles described in this section.

(b) Dihedral angle L (left) is formed by two intersecting vertical planes, the first parallel to the longitudinal axis of the airplane, and the other at 110 degrees to the left of the first, as viewed when looking forward along the longitudinal axis.

(c) Dihedral angle R (right) is formed by two intersecting vertical planes, the first parallel to the longitudinal axis of the airplane, and the other at 110 degrees to the right of the first, as viewed when looking forward along the longitudinal axis.

(d) Dihedral angle A (aft) is formed by two intersecting vertical planes making angles of 70 degrees to the right and to the left, respectively, to a vertical plane passing through the longitudinal axis, as viewed when looking aft along the longitudinal axis.

(e) If the rear position light, when mounted as far aft as practicable in accordance with §23.1385(c), cannot show unbroken light within dihedral angle A (as defined in paragraph (d) of this section), a solid angle or angles of obstructed visibility totaling not more than 0.04 steradians is allowable within that dihedral angle, if such solid angle is within a cone whose apex is at the rear position light and whose elements make an angle of 30° with a vertical line passing through the rear position light.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–12, 36 FR 21278, Nov. 5, 1971; Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1389 Position light distribution and intensities.

(a) General. The intensities prescribed in this section must be provided by new equipment with each light cover and color filter in place. Intensities must be determined with the light source operating at a steady value equal to the average luminous output of the source at the normal operating voltage of the airplane. The light distribution and intensity of each position light must meet the requirements of paragraph (b) of this section.

(b) Position lights. The light distribution and intensities of position lights must be expressed in terms of minimum intensities in the horizontal plane, minimum intensities in any vertical plane, and maximum intensities in overlapping beams, within dihedral angles L, R, and A, and must meet the following requirements:

(1) Intensities in the horizontal plane. Each intensity in the horizontal plane (the plane containing the longitudinal axis of the airplane and perpendicular to the plane of symmetry of the airplane) must equal or exceed the values in §23.1391.

(2) Intensities in any vertical plane. Each intensity in any vertical plane (the plane perpendicular to the horizontal plane) must equal or exceed the appropriate value in §23.1393, where I is the minimum intensity prescribed in §23.1391 for the corresponding angles in the horizontal plane.

(3) Intensities in overlaps between adjacent signals. No intensity in any overlap between adjacent signals may exceed the values in §23.1395, except that higher intensities in overlaps may be used with main beam intensities substantially greater than the minima specified in §§23.1391 and

23.1393, if the overlap intensities in relation to the main beam intensities do not adversely affect signal clarity. When the peak intensity of the left and right position lights is more than 100 candles, the maximum overlap intensities between them may exceed the values in §23.1395 if the overlap intensity in Area A is not more than 10 percent of peak position light intensity and the overlap intensity in Area B is not more than 2.5 percent of peak position light intensity.

(c) Rear position light installation. A single rear position light may be installed in a position displaced laterally from the plane of symmetry of an airplane if—

- (1) The axis of the maximum cone of illumination is parallel to the flight path in level flight; and
- (2) There is no obstruction aft of the light and between planes 70 degrees to the right and left of the axis of maximum illumination.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1391 Minimum intensities in the horizontal plane of position lights.

Each position light intensity must equal or exceed the applicable values in the following table:

Dihedral angle (light included)	Angle from right or left of longitudinal axis, measured from dead ahead	Intensity (candles)
L and R (red and green)	0° to 10°	40
	10° to 20°	30
	20° to 110°	5
A (rear white)	110° to 180°	20

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1393 Minimum intensities in any vertical plane of position lights.

Each position light intensity must equal or exceed the applicable values in the following table:

Angle above or below the horizontal plane	Intensity, I
0°	1.00
0° to 5°	0.90
5° to 10°	0.80
10° to 15°	0.70
15° to 20°	0.50
20° to 30°	0.30

30° to 40°	0.10
40° to 90°	0.05

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1395 Maximum intensities in overlapping beams of position lights.

No position light intensity may exceed the applicable values in the following equal or exceed the applicable values in §23.1389(b)(3):

Overlaps	Maximum intensity	
	Area A (candles)	Area B (candles)
Green in dihedral angle L	10	1
Red in dihedral angle R	10	1
Green in dihedral angle A	5	1
Red in dihedral angle A	5	1
Rear white in dihedral angle L	5	1
Rear white in dihedral angle R	5	1

Where—

(a) Area A includes all directions in the adjacent dihedral angle that pass through the light source and intersect the common boundary plane at more than 10 degrees but less than 20 degrees; and

(b) Area B includes all directions in the adjacent dihedral angle that pass through the light source and intersect the common boundary plane at more than 20 degrees.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–43, 58 FR 18977, Apr. 9, 1993]

§ 23.1397 Color specifications.

Each position light color must have the applicable International Commission on Illumination chromaticity coordinates as follows:

(a) Aviation red—

y is not greater than 0.335; and

z is not greater than 0.002.

(b) Aviation green—

x is not greater than $0.440 - 0.320 y$;

x is not greater than $y - 0.170$; and

y is not less than $0.390 - 0.170 x$.

(c) Aviation white—

x is not less than 0.300 and not greater than 0.540;

y is not less than $x - 0.040$ or $y_0 - 0.010$, whichever is the smaller; and

y is not greater than $x + 0.020$ nor $0.636 - 0.400 x$;

Where y_0 is the y coordinate of the Planckian radiator for the value of x considered.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, amended by Amdt. 23-11, 36 FR 12971, July 10, 1971]

§ 23.1399 Riding light.

(a) Each riding (anchor) light required for a seaplane or amphibian, must be installed so that it can—

(1) Show a white light for at least two miles at night under clear atmospheric conditions; and

(2) Show the maximum unbroken light practicable when the airplane is moored or drifting on the water.

(b) Externally hung lights may be used.

§ 23.1401 Anticollision light system.

(a) General. The airplane must have an anticollision light system that:

(1) Consists of one or more approved anticollision lights located so that their light will not impair the flight crewmembers' vision or detract from the conspicuity of the position lights; and

(2) Meets the requirements of paragraphs (b) through (f) of this section.

(b) Field of coverage. The system must consist of enough lights to illuminate the vital areas around the airplane, considering the physical configuration and flight characteristics of the airplane. The field of coverage must extend in each direction within at least 75 degrees above and 75 degrees below the horizontal plane of the airplane, except that there may be solid angles of obstructed visibility totaling not more than 0.5 steradians.

(c) Flashing characteristics. The arrangement of the system, that is, the number of light sources, beam width, speed of rotation, and other characteristics, must give an effective flash frequency of not less than 40, nor more than 100, cycles per minute. The effective flash frequency is the

frequency at which the airplane's complete anticollision light system is observed from a distance, and applies to each sector of light including any overlaps that exist when the system consists of more than one light source. In overlaps, flash frequencies may exceed 100, but not 180, cycles per minute.

(d) Color. Each anticollision light must be either aviation red or aviation white and must meet the applicable requirements of §23.1397.

(e) Light intensity. The minimum light intensities in any vertical plane, measured with the red filter (if used) and expressed in terms of “effective” intensities, must meet the requirements of paragraph (f) of this section. The following relation must be assumed:

$$I_e = \frac{\int_{t_1}^{t_2} I(t) dt}{0.2 + (t_2 - t_1)}$$

where:

I_e = effective intensity (candles).

$I(t)$ = instantaneous intensity as a function of time.

$t_2 - t_1$ = flash time interval (seconds).

Normally, the maximum value of effective intensity is obtained when t_2 and t_1 are chosen so that the effective intensity is equal to the instantaneous intensity at t_2 and t_1 .

(f) Minimum effective intensities for anticollision lights. Each anticollision light effective intensity must equal or exceed the applicable values in the following table.

Angle above or below the horizontal plane	Effective intensity (candles)
0° to 5°	400
5° to 10°	240
10° to 20°	80
20° to 30°	40
30° to 75°	20

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–11, 36 FR 12972, July 10, 1971; Amdt. 23–20, 42 FR 36969, July 18, 1977; Amdt. 23–49, 61 FR 5169, Feb. 9, 1996]

Safety Equipment

§ 23.1411 General.

(a) Required safety equipment to be used by the flight crew in an emergency, such as automatic

liferaft releases, must be readily accessible.

(b) Stowage provisions for required safety equipment must be furnished and must—

(1) Be arranged so that the equipment is directly accessible and its location is obvious; and

(2) Protect the safety equipment from damage caused by being subjected to the inertia loads resulting from the ultimate static load factors specified in §23.561(b)(3) of this part.

[Amdt. 23–17, 41 FR 55465, Dec. 20, 1976, as amended by Amdt. 23–36, 53 FR 30815, Aug. 15, 1988]

§ 23.1415 Ditching equipment.

(a) Emergency flotation and signaling equipment required by any operating rule in this chapter must be installed so that it is readily available to the crew and passengers.

(b) Each raft and each life preserver must be approved.

(c) Each raft released automatically or by the pilot must be attached to the airplane by a line to keep it alongside the airplane. This line must be weak enough to break before submerging the empty raft to which it is attached.

(d) Each signaling device required by any operating rule in this chapter, must be accessible, function satisfactorily, and must be free of any hazard in its operation.

§ 23.1416 Pneumatic de-icer boot system.

If certification with ice protection provisions is desired and a pneumatic de-icer boot system is installed—

(a) The system must meet the requirements specified in §23.1419.

(b) The system and its components must be designed to perform their intended function under any normal system operating temperature or pressure, and

(c) Means to indicate to the flight crew that the pneumatic de-icer boot system is receiving adequate pressure and is functioning normally must be provided.

[Amdt. 23–23, 43 FR 50593, Oct. 30, 1978]

§ 23.1419 Ice protection.

If certification with ice protection provisions is desired, compliance with the requirements of this section and other applicable sections of this part must be shown:

(a) An analysis must be performed to establish, on the basis of the airplane's operational needs, the adequacy of the ice protection system for the various components of the airplane. In addition, tests of the ice protection system must be conducted to demonstrate that the airplane is capable of

operating safely in continuous maximum and intermittent maximum icing conditions, as described in appendix C of part 25 of this chapter. As used in this section, “Capable of operating safely,” means that airplane performance, controllability, maneuverability, and stability must not be less than that required in part 23, subpart B.

(b) Except as provided by paragraph (c) of this section, in addition to the analysis and physical evaluation prescribed in paragraph (a) of this section, the effectiveness of the ice protection system and its components must be shown by flight tests of the airplane or its components in measured natural atmospheric icing conditions and by one or more of the following tests, as found necessary to determine the adequacy of the ice protection system—

(1) Laboratory dry air or simulated icing tests, or a combination of both, of the components or models of the components.

(2) Flight dry air tests of the ice protection system as a whole, or its individual components.

(3) Flight test of the airplane or its components in measured simulated icing conditions.

(c) If certification with ice protection has been accomplished on prior type certificated airplanes whose designs include components that are thermodynamically and aerodynamically equivalent to those used on a new airplane design, certification of these equivalent components may be accomplished by reference to previously accomplished tests, required in §23.1419 (a) and (b), provided that the applicant accounts for any differences in installation of these components.

(d) A means must be identified or provided for determining the formation of ice on the critical parts of the airplane. Adequate lighting must be provided for the use of this means during night operation. Also, when monitoring of the external surfaces of the airplane by the flight crew is required for operation of the ice protection equipment, external lighting must be provided that is adequate to enable the monitoring to be done at night. Any illumination that is used must be of a type that will not cause glare or reflection that would handicap crewmembers in the performance of their duties. The Airplane Flight Manual or other approved manual material must describe the means of determining ice formation and must contain information for the safe operation of the airplane in icing conditions.

[Doc. No. 26344, 58 FR 18977, Apr. 9, 1993]

Miscellaneous Equipment

<p>23.1431 Electronic equipment.</p> <p>(a) In showing compliance with paragraphs 23.1309(a), (b), and (c) of this RBAC with respect to radio and electronic equipment and their installations, critical environmental conditions must be considered.</p> <p>(b) Radio and electronic equipment, controls, and wiring must be installed so that operation of any unit or system of units will not adversely affect the simultaneous operation of any other</p>	<p>23.1431 Equipamentos eletrônicos.</p> <p>(a) Para demonstração de cumprimento com os parágrafos 23.1309(a), (b) e (c) deste RBAC com relação a rádios e equipamentos eletrônicos e suas instalações, devem ser consideradas as condições ambientais críticas.</p> <p>(b) Os rádios e equipamentos eletrônicos, controles e cablagem devem ser instalados de forma que o funcionamento de qualquer unidade ou sistema de unidades não afete</p>
---	--

<p>radio or electronic unit, or system of units, required by this RBAC.</p> <p>(c) For those airplanes required to have more than one flightcrew member, or whose operation will require more than one flightcrew member, the cockpit must be evaluated to determine if the flightcrew members, when seated at their duty station, can converse without difficulty under the actual cockpit noise conditions when the airplane is being operated. If the airplane design includes provision for the use of communication headsets, the evaluation must also consider conditions where headsets are being used. If the evaluation shows conditions under which it will be difficult to converse, an intercommunication system must be provided.</p> <p>(d) If installed communication equipment includes transmitter “off-on” switching, that switching means must be designed to return from the “transmit” to the “off” position when it is released and ensure that the transmitter will return to the off (non transmitting) state.</p> <p>(e) If provisions for the use of communication headsets are provided, it must be demonstrated that the flightcrew members will receive all aural warnings under the actual cockpit noise conditions when the airplane is being operated when any headset is being used.</p>	<p>adversamente o funcionamento simultâneo de qualquer outro rádio ou unidade eletrônica, ou sistema de unidades, exigidos pelos RBAC.</p> <p>(c) Para os aviões que exijam mais de um tripulante de voo, ou que sua operação requeira mais de um tripulante de voo, a cabine de comando deve ser avaliada para determinar se os membros da tripulação de voo, quando sentados em seus postos de trabalho, podem conversar sem dificuldade nas condições reais de ruído da cabine de comando quando o avião estiver em operação. Se o projeto do avião incluir provisões para o uso de fones de ouvido para comunicação, a avaliação também deve considerar condições onde os fones de ouvido estejam em uso. Se a avaliação mostrar condições nas quais será difícil conversar, será exigido um sistema de intercomunicação.</p> <p>(d) Se o equipamento de comunicação instalado incluir um transmissor com chaveamento “desliga-liga”, este modo de chaveamento deve ser projetado para retornar da posição “transmissão” para a posição “desligada” quando for solto e assegurar que o transmissor retornará para o estado desligado (não transmitindo).</p> <p>(e) Se forem fornecidas provisões para o uso de fones de ouvido para comunicação, deve-se demonstrar que os membros da tripulação de voo receberão todos os alarmes sonoros nas condições reais de ruído da cabine de comando quando o avião estiver em operação e qualquer fone de ouvido estiver em uso.</p>
---	--

[Doc. No. 26344, 58 FR 18977, Apr. 9, 1993, as amended by Amdt. 23-49, 61 FR 5169, Feb. 9, 1996; Amdt. 23-62, 76 FR 75761, Dec. 2, 2011]

§ 23.1435 Hydraulic systems.

(a) Design. Each hydraulic system must be designed as follows:

(1) Each hydraulic system and its elements must withstand, without yielding, the structural loads expected in addition to hydraulic loads.

(2) A means to indicate the pressure in each hydraulic system which supplies two or more primary functions must be provided to the flight crew.

(3) There must be means to ensure that the pressure, including transient (surge) pressure, in any part of the system will not exceed the safe limit above design operating pressure and to prevent excessive pressure resulting from fluid volumetric changes in all lines which are likely to remain closed long enough for such changes to occur.

(4) The minimum design burst pressure must be 2.5 times the operating pressure.

(b) Tests. Each system must be substantiated by proof pressure tests. When proof tested, no part of any system may fail, malfunction, or experience a permanent set. The proof load of each system must be at least 1.5 times the maximum operating pressure of that system.

(c) Accumulators. A hydraulic accumulator or reservoir may be installed on the engine side of any firewall if—

(1) It is an integral part of an engine or propeller system, or

(2) The reservoir is nonpressurized and the total capacity of all such nonpressurized reservoirs is one quart or less.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13096, Aug. 13, 1969; Amdt. 23–14, 38 FR 31824, Nov. 19, 1973; Amdt. 23–43, 58 FR 18977, Apr. 9, 1993; Amdt. 23–49, 61 FR 5170, Feb. 9, 1996]

§ 23.1437 Accessories for multiengine airplanes.

For multiengine airplanes, engine-driven accessories essential to safe operation must be distributed among two or more engines so that the failure of any one engine will not impair safe operation through the malfunctioning of these accessories.

§ 23.1438 Pressurization and pneumatic systems.

(a) Pressurization system elements must be burst pressure tested to 2.0 times, and proof pressure tested to 1.5 times, the maximum normal operating pressure.

(b) Pneumatic system elements must be burst pressure tested to 3.0 times, and proof pressure tested to 1.5 times, the maximum normal operating pressure.

(c) An analysis, or a combination of analysis and test, may be substituted for any test required by paragraph (a) or (b) of this section if the Administrator finds it equivalent to the required test.

[Amdt. 23–20, 42 FR 36969, July 18, 1977]

§ 23.1441 Oxygen equipment and supply.

(a) If certification with supplemental oxygen equipment is requested, or the airplane is approved for operations at or above altitudes where oxygen is required to be used by the operating rules, oxygen equipment must be provided that meets the requirements of this section and §§23.1443 through 23.1449. Portable oxygen equipment may be used to meet the requirements of this part if the portable equipment is shown to comply with the applicable requirements, is identified in the

airplane type design, and its stowage provisions are found to be in compliance with the requirements of §23.561.

(b) The oxygen system must be free from hazards in itself, in its method of operation, and its effect upon other components.

(c) There must be a means to allow the crew to readily determine, during the flight, the quantity of oxygen available in each source of supply.

(d) Each required flight crewmember must be provided with—

(1) Demand oxygen equipment if the airplane is to be certificated for operation above 25,000 feet.

(2) Pressure demand oxygen equipment if the airplane is to be certificated for operation above 40,000 feet.

(e) There must be a means, readily available to the crew in flight, to turn on and to shut off the oxygen supply at the high pressure source. This shutoff requirement does not apply to chemical oxygen generators.

[Amdt. 23–9, 35 FR 6386, Apr. 21, 1970, as amended by Amdt. 23–43, 58 FR 18978, Apr. 9, 1993]

<p>23.1443 Minimum mass flow of supplemental oxygen.</p> <p>(a) If the airplane is to be certified above 41.000 feet (12.497 meters), a continuous flow oxygen system must be provided for each passenger.</p> <p>(b) If continuous flow oxygen equipment is installed, an applicant must show compliance with the requirements of either paragraphs (b)(1) and (b)(2) or paragraph (b)(3) of this section:</p> <p>(1) For each passenger, the minimum mass flow of supplemental oxygen required at various cabin pressure altitudes may not be less than the flow required to maintain, during inspiration and while using the oxygen equipment (including masks) provided, the following mean tracheal oxygen partial pressures:</p> <p>(i) At cabin pressure altitudes above 10.000 feet (3.048 meters) up to and including 18.500 feet (5.639 meters), a mean tracheal oxygen partial pressure of 100 mm Hg when breathing</p>	<p>23.1443 Fluxo mássico mínimo de oxigênio suplementar.</p> <p>(a) Se o avião for ser certificado para operações acima de 41.000 pés (12.497 metros), deve ser providenciado para cada passageiro um sistema de fluxo contínuo de oxigênio.</p> <p>(b) Se estiver instalado um equipamento de fluxo contínuo de oxigênio, o requerente deve demonstrar cumprimento com os requisitos de ambos os parágrafos (b)(1) e (b)(2) ou o parágrafo (b)(3) desta seção:</p> <p>(1) Para cada passageiro, o fluxo mínimo de massa de oxigênio suplementar necessário em várias altitudes de pressão de cabine não pode ser menor do que o fluxo necessário para manter, durante a inspiração e com o uso do equipamento de oxigênio fornecido (incluindo máscaras), as seguintes pressões parciais médias de oxigênio traqueal:</p> <p>(i) Para altitudes de pressão de cabine acima de 10.000 pés (3.048 metros) até 18.500 pés (5.639 metros) inclusive, uma pressão parcial</p>
---	--

15 liters per minute, Body Temperature, Pressure, Saturated (BTPS) and with a tidal volume of 700 cc with a constant time interval between respirations;

(ii) At cabin pressure altitudes above 18.500 feet (5.639 meters) up to and including 40.000 feet (12.192 meters), a mean tracheal oxygen partial pressure of 83,8 mm Hg when breathing 30 liters per minute, BTPS, and with a tidal volume of 1.100 cc with a constant time interval between respirations.

(2) For each flight crewmember, the minimum mass flow may not be less than the flow required to maintain, during inspiration, a mean tracheal oxygen partial pressure of 149 mm Hg when breathing 15 liters per minute, BTPS, and with a maximum tidal volume of 700 cc with a constant time interval between respirations;

(3) The minimum mass flow of supplemental oxygen supplied for each user must be at a rate not less than that shown in the following figure for each altitude up to and including the maximum operating altitude of the airplane.

Cabin Pressure Altitude Thousands of Feet.

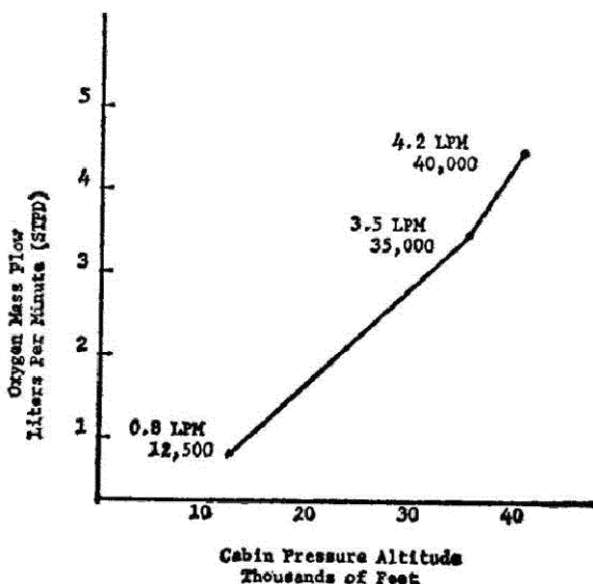


FIGURE 1--Cabin Pressure Altitude

(c) If demand equipment is installed for use by flight crewmembers, the minimum mass flow

média de oxigênio traqueal de 100 mmHg quando respirando 15 litros por minuto, à Temperatura-Pressão Corporal Saturada (Body Temperature, Pressure, Saturated - BTPS) e com um volume corrente de 700 cc., com um intervalo de tempo constante entre as respirações;

(ii) Para altitudes de pressão de cabine acima de 18.500 pés (5.639 metros) até 40.000 pés (12.192 metros) inclusive, uma pressão parcial média de oxigênio traqueal de 83,8 mmHg quando respirando 30 litros por minuto, BTPS, e com um volume corrente de 1.100 cc., com um intervalo de tempo constante entre as respirações.

(2) Para cada membro da tripulação de voo, o fluxo mássico mínimo não pode ser menor do que o fluxo necessário para manter, durante a inspiração, uma pressão parcial média de oxigênio traqueal de 149 milímetros Hg quando respirando 15 litros por minuto, BTPS, e com um volume corrente máximo de 700 cc. com um intervalo de tempo constante entre as respirações;

(3) O fluxo mássico mínimo de oxigênio suplementar fornecido para cada usuário deve estar a uma taxa não inferior àquela apresentada na figura a seguir, para cada altitude até, e inclusive, a altitude máxima de operação do avião.

of supplemental oxygen required for each flight crewmember may not be less than the flow required to maintain, during inspiration, a mean tracheal oxygen partial pressure of 122 mm Hg up to and including a cabin pressure altitude of 35.000 feet (10.668 meters), and 95 percent oxygen between cabin pressure altitudes of 35.000 and 40.000 feet (10.668 and 12.192 meters), when breathing 20 liters per minute BTPS. In addition, there must be means to allow the flight crew to use undiluted oxygen at their discretion.

(d) If first-aid oxygen equipment is installed, the minimum mass flow of oxygen to each user may not be less than 4 liters per minute, STPD. However, there may be a means to decrease this flow to not less than 2 liters per minute, STPD, at any cabin altitude. The quantity of oxygen required is based upon an average flow rate of 3 liters per minute per person for whom first-aid oxygen is required.

(e) As used in this section:

(1) BTPS means Body Temperature, and Pressure, Saturated (which is 37 °C, and the ambient pressure to which the body is exposed, minus 47 mm Hg, which is the tracheal pressure displaced by water vapor pressure when the breathed air becomes saturated with water vapor at 37 °C);

(2) STPD means Standard, Temperature, and Pressure, Dry (which is 0 °C at 760 mm Hg with no water vapor).

Cabin Pressure Altitude Thousands of Feet.

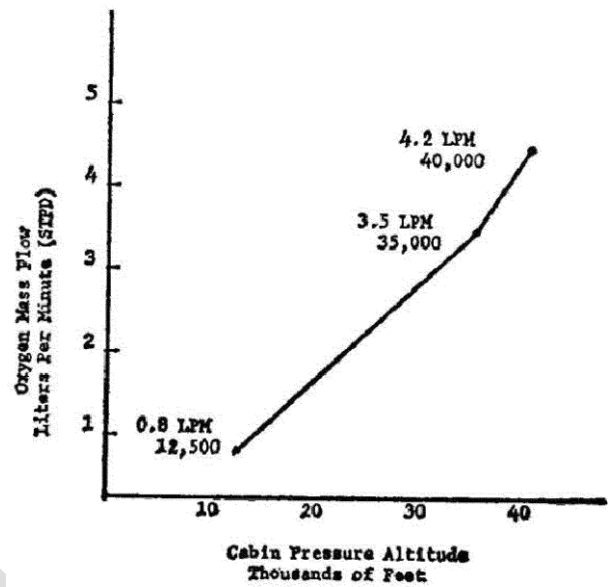


FIGURE 1--Cabin Pressure Altitude

(c) Se equipamento de demanda estiver instalado para uso de tripulantes de voo, o fluxo mássico mínimo de oxigênio suplementar necessário para cada tripulante de voo não pode ser menor que o fluxo necessário para manter, durante a inspiração, uma pressão parcial média de oxigênio traqueal de 122 mmHg até e inclusive a uma altitude de pressão de cabine de 35.000 pés (10.668 metros), e 95 por cento de oxigênio entre altitudes pressão de cabine de 35.000 e 40.000 pés (10.668 e 12.192 metros), quando respirando 20 litros por minuto BTPS. Além disso, deve haver meios para permitir que a tripulação use oxigênio puro a seu critério.

(d) Se equipamento de oxigênio para primeiros socorros estiver instalado, o fluxo mássico mínimo de oxigênio para cada usuário não pode ser inferior a 4 litros por minuto, STPD. No entanto, pode haver um meio de diminuir esse fluxo para um mínimo de 2 litros por minuto, STPD, em qualquer altitude de cabine. O oxigênio necessário é baseado em uma vazão média de 3 litros por minuto por pessoa que requeira oxigênio de primeiros socorros.

(e) Como usados nesta seção:

	<p>(1) BTPS significa Temperatura e Pressão Corporal Saturada (<i>Body Temperature, and Pressure, Saturated</i>) que é igual a 37 ° C e a pressão ambiente a qual o corpo é exposto menos 47 mmHg, que é a pressão traqueal deslocada pela pressão de vapor de água quando o ar respirado se torna saturado com vapor de água a 37 ° C;</p> <p>(2) STPD significa Pressão e Temperatura Padrão Seca (<i>Standard Temperature and Pressure, Dry</i>), que é de 0°C a 760 mmHg sem vapor de água.</p>
--	---

[Doc. No. FAA-2009-0738, 76 FR 75761, Dec. 2, 2011]

<p>23.1445 Oxygen distribution system.</p> <p>(a) Except for flexible lines from oxygen outlets to the dispensing units, or where shown to be otherwise suitable to the installation, nonmetallic tubing must not be used for any oxygen line that is normally pressurized during flight.</p> <p>(b) Nonmetallic oxygen distribution lines must not be routed where they may be subjected to elevated temperatures, electrical arcing, and released flammable fluids that might result from any probable failure.</p> <p>(c) If the flight crew and passengers share a common source of oxygen, a means to separately reserve the minimum supply required by the flight crew must be provided.</p>	<p>23.1445 Sistemas de distribuição de oxigênio.</p> <p>(a) Exceto para linhas flexíveis conectando as tomadas de oxigênio com as máscaras, ou onde foi demonstrada adequação à instalação, tubos não-metálicos não podem ser utilizados para qualquer linha de oxigênio que seja normalmente pressurizada durante o voo.</p> <p>(b) Linhas de distribuição de oxigênio não metálicas não podem passar em locais sujeitos a temperaturas elevadas, arcos elétricos e líquidos inflamáveis que possam ser liberados em qualquer falha provável.</p> <p>(c) Se a tripulação e os passageiros compartilharem a mesma fonte de oxigênio, devem ser providenciados meios para reservar separadamente o suprimento mínimo necessário para a tripulação de voo.</p>
---	---

[Doc. No. 26344, 58 FR 18978, Apr. 9, 1993, as amended by Amdt. 23-62, 76 FR 75762, Dec. 2, 2011]

<p>23.1447 Equipment standards for oxygen dispensing units.</p> <p>If oxygen dispensing units are installed, the following apply:</p> <p>(a) There must be an individual dispensing unit for each occupant for whom supplemental</p>	<p>23.1447 Requisitos de equipamentos para unidades de distribuição de oxigênio.</p> <p>Se houverem máscaras de oxigênio instaladas, o seguinte se aplica:</p> <p>(a) Deve haver uma máscara individual para cada ocupante para quem o oxigênio</p>
---	--

<p>oxygen is to be supplied. Each dispensing unit must:</p> <p>(1) Provide for effective utilization of the oxygen being delivered to the unit;</p> <p>(2) Be capable of being readily placed into position on the face of the user;</p> <p>(3) Be equipped with a suitable means to retain the unit in position on the face;</p> <p>(4) If radio equipment is installed, the flightcrew oxygen dispensing units must be designed to allow the use of that equipment and to allow communication with any other required crew member while at their assigned duty station.</p> <p>(b) If certification for operation up to and including 18,000 feet (5.486 meters) (MSL) is requested, each oxygen dispensing unit must:</p> <p>(1) Cover the nose and mouth of the user; or</p> <p>(2) Be a nasal cannula, in which case one oxygen dispensing unit covering both the nose and mouth of the user must be available. In addition, each nasal cannula or its connecting tubing must have permanently affixed:</p> <p>(i) A visible warning against smoking while in use;</p> <p>(ii) An illustration of the correct method of donning; and</p> <p>(iii) A visible warning against use with nasal obstructions or head colds with resultant nasal congestion.</p> <p>(c) If certification for operation above 18.000 feet (5.486 meters) (MSL) is requested, each oxygen dispensing unit must cover the nose and mouth of the user.</p> <p>(d) For a pressurized airplane designed to operate at flight altitudes above 25.000 feet (7.620 meters) (MSL), the dispensing units</p>	<p>suplementar será fornecido. Cada máscara deve:</p> <p>(1) Prover utilização eficaz do oxigênio que está sendo entregue à máscara;</p> <p>(2) Ser capaz de ser facilmente colocada em posição sobre o rosto do usuário;</p> <p>(3) Estar equipada com meios adequados para manter a máscara em posição sobre o rosto;</p> <p>(4) Se houver equipamento de rádio instalado, as máscaras de oxigênio dos tripulantes devem ser projetadas para permitir o uso desse equipamento e para permitir a comunicação com qualquer outro membro da tripulação exigida enquanto no seu posto de serviço.</p> <p>(b) Se é solicitada certificação para operação até e inclusive a 18.000 pés (5.486 metros) (MSL), cada máscara de oxigênio deve:</p> <p>(1) Cobrir o nariz e a boca do usuário; ou</p> <p>(2) Ser uma cânula nasal, neste caso deve estar disponível uma máscara de oxigênio que cubra o nariz e boca do usuário. Além disso, cada cânula nasal ou seus tubos de ligação devem ter permanentemente afixados:</p> <p>(i) Uma advertência visível contra fumar durante a utilização;</p> <p>(ii) Uma ilustração do método correto de colocar; e</p> <p>(iii) um aviso visível contra o uso com obstrução nasal ou resfriados com congestão nasal resultante.</p> <p>(c) Se for solicitada certificação para operação acima de 18.000 pés (5.486 metros) (MSL), cada máscara de oxigênio deve cobrir o nariz e a boca do usuário.</p> <p>(d) Para um avião pressurizado projetado para operar em altitudes de voo acima de 25.000 pés (7.620 metros) (MSL), as máscaras devem</p>
--	---

<p>must meet the following:</p> <p>(1) The dispensing units for passengers must be connected to an oxygen supply terminal and be immediately available to each occupant wherever seated;</p> <p>(2) The dispensing units for crewmembers must be automatically presented to each crewmember before the cabin pressure altitude exceeds 15.000 feet (4.572 meters), or the units must be of the quick-donning type, connected to an oxygen supply terminal that is immediately available to crewmembers at their duty station.</p> <p>(e) If certification for operation above 30.000 feet (9.144 meters) is requested, the dispensing units for passengers must be automatically presented to each occupant before the cabin pressure altitude exceeds 15.000 feet (4.572 meters).</p> <p>(f) If an automatic dispensing unit (hose and mask, or other unit) system is installed, the crew must be provided with a manual means to make the dispensing units immediately available in the event of failure of the automatic system.</p> <p>(g) If the airplane is to be certified for operation above 41.000 feet (12.497 meters), a quickdonning oxygen mask system, with a pressure demand, mask mounted regulator must be provided for the flight crew. This dispensing unit must be immediately available to the flight crew when seated at their station and installed so that it:</p> <p>(1) Can be placed on the face from its ready position, properly secured, sealed, and supplying oxygen upon demand, with one hand, within five seconds and without disturbing eyeglasses or causing delay in proceeding with emergency duties; and</p> <p>(2) Allows, while in place, the performance of normal communication functions.</p>	<p>satisfazer o seguinte:</p> <p>(1) As máscaras para os passageiros devem ser conectadas a um terminal de fornecimento de oxigênio e estar imediatamente disponíveis para cada ocupante sentado;</p> <p>(2) As máscaras para tripulantes devem ser automaticamente disponibilizadas a cada membro da tripulação antes que a altitude pressão de cabine ultrapasse 15000 pés (4.572 metros), ou as máscaras devem ser de colocação rápida, conectadas a um terminal de fornecimento de oxigênio imediatamente disponível para os membros da tripulação em suas estações de trabalho.</p> <p>(e) Se for solicitada certificação para operar acima de 30.000 pés (9.144 metros), as máscaras para passageiros devem ser disponibilizadas automaticamente a cada ocupante antes que a altitude de pressão de cabine exceda 15.000 pés (4.572 metros).</p> <p>(f) Se uma unidade automática de suprimento (mangueira e máscara, ou outra unidade) estiver instalada, deverá haver uma forma manual e imediata para a tripulação disponibilizar as unidades de suprimento, no caso de falha do sistema automático.</p> <p>(g) Se o avião for para ser certificado para operação acima de 41.000 pés (12.497 metros), deve ser providenciado para a tripulação de voo máscara de oxigênio de colocação rápida e com regulador por demanda pressurizada. Esta unidade de fornecimento deve estar disponível imediatamente para a tripulação de voo quando sentada na sua estação de trabalho e instalada de modo que:</p> <p>(1) Possa ser posicionada sobre a face, a partir de sua posição de instalação, adequadamente suportada, selada e fornecendo oxigênio sob demanda, com uma mão dentro de cinco segundos, e sem interferir com óculos ou causar atraso na execução de atividades de emergência; e</p>
--	---

	(2) Permita, quando colocada, o desempenho de funções de comunicação normais.
--	---

[Amdt. 23-9, 35 FR 6387, Apr. 21, 1970, as amended by Amdt. 23-20, 42 FR 36969, July 18, 1977; Amdt. 23-30, 49 FR 7340, Feb. 28, 1984; Amdt. 23-43, 58 FR 18978, Apr. 9, 1993; Amdt. 23-49, 61 FR 5170, Feb. 9, 1996; Amdt. 23-62, 76 FR 75762, Dec. 2, 2011]

§ 23.1449 Means for determining use of oxygen.

There must be a means to allow the crew to determine whether oxygen is being delivered to the dispensing equipment.

[Amdt. 23-9, 35 FR 6387, Apr. 21, 1970]

§ 23.1450 Chemical oxygen generators.

(a) For the purpose of this section, a chemical oxygen generator is defined as a device which produces oxygen by chemical reaction.

(b) Each chemical oxygen generator must be designed and installed in accordance with the following requirements:

(1) Surface temperature developed by the generator during operation may not create a hazard to the airplane or to its occupants.

(2) Means must be provided to relieve any internal pressure that may be hazardous.

(c) In addition to meeting the requirements in paragraph (b) of this section, each portable chemical oxygen generator that is capable of sustained operation by successive replacement of a generator element must be placarded to show—

(1) The rate of oxygen flow, in liters per minute;

(2) The duration of oxygen flow, in minutes, for the replaceable generator element; and

(3) A warning that the replaceable generator element may be hot, unless the element construction is such that the surface temperature cannot exceed 100 °F.

[Amdt. 23-20, 42 FR 36969, July 18, 1977]

§ 23.1451 Fire protection for oxygen equipment.

Oxygen equipment and lines must:

(a) Not be installed in any designed fire zones.

(b) Be protected from heat that may be generated in, or escape from, any designated fire zone.

(c) Be installed so that escaping oxygen cannot come in contact with and cause ignition of grease,

fluid, or vapor accumulations that are present in normal operation or that may result from the failure or malfunction of any other system.

[Doc. No. 27806, 61 FR 5170, Feb. 9, 1996]

§ 23.1453 Protection of oxygen equipment from rupture.

(a) Each element of the oxygen system must have sufficient strength to withstand the maximum pressure and temperature, in combination with any externally applied loads arising from consideration of limit structural loads, that may be acting on that part of the system.

(b) Oxygen pressure sources and the lines between the source and the shutoff means must be:

(1) Protected from unsafe temperatures; and

(2) Located where the probability and hazard of rupture in a crash landing are minimized.

[Doc. No. 27806, 61 FR 5170, Feb. 9, 1996]

§ 23.1457 Cockpit voice recorders.

(a) Each cockpit voice recorder required by the operating rules of this chapter must be approved and must be installed so that it will record the following:

(1) Voice communications transmitted from or received in the airplane by radio.

(2) Voice communications of flight crewmembers on the flight deck.

(3) Voice communications of flight crewmembers on the flight deck, using the airplane's interphone system.

(4) Voice or audio signals identifying navigation or approach aids introduced into a headset or speaker.

(5) Voice communications of flight crewmembers using the passenger loudspeaker system, if there is such a system and if the fourth channel is available in accordance with the requirements of paragraph (c)(4)(ii) of this section.

(6) If datalink communication equipment is installed, all datalink communications, using an approved data message set. Datalink messages must be recorded as the output signal from the communications unit that translates the signal into usable data.

(b) The recording requirements of paragraph (a)(2) of this section must be met by installing a cockpit-mounted area microphone, located in the best position for recording voice communications originating at the first and second pilot stations and voice communications of other crewmembers on the flight deck when directed to those stations. The microphone must be so located and, if necessary, the preamplifiers and filters of the recorder must be so adjusted or supplemented, so that the intelligibility of the recorded communications is as high as practicable when recorded under flight cockpit noise conditions and played back. Repeated aural or visual playback of the record

may be used in evaluating intelligibility.

(c) Each cockpit voice recorder must be installed so that the part of the communication or audio signals specified in paragraph (a) of this section obtained from each of the following sources is recorded on a separate channel:

(1) For the first channel, from each boom, mask, or handheld microphone, headset, or speaker used at the first pilot station.

(2) For the second channel from each boom, mask, or handheld microphone, headset, or speaker used at the second pilot station.

(3) For the third channel—from the cockpit-mounted area microphone.

(4) For the fourth channel from:

(i) Each boom, mask, or handheld microphone, headset, or speaker used at the station for the third and fourth crewmembers.

(ii) If the stations specified in paragraph (c)(4)(i) of this section are not required or if the signal at such a station is picked up by another channel, each microphone on the flight deck that is used with the passenger loudspeaker system, if its signals are not picked up by another channel.

(5) And that as far as is practicable all sounds received by the microphone listed in paragraphs (c)(1), (2), and (4) of this section must be recorded without interruption irrespective of the position of the interphone-transmitter key switch. The design shall ensure that sidetone for the flight crew is produced only when the interphone, public address system, or radio transmitters are in use.

(d) Each cockpit voice recorder must be installed so that:

(1) It receives its electrical power from the bus that provides the maximum reliability for operation of the cockpit voice recorder without jeopardizing service to essential or emergency loads. The cockpit voice recorder must remain powered for as long as possible without jeopardizing emergency operation of the airplane;

(2) There is an automatic means to simultaneously stop the recorder and prevent each erasure feature from functioning, within 10 minutes after crash impact; and

(3) There is an aural or visual means for preflight checking of the recorder for proper operation;

(4) Any single electrical failure external to the recorder does not disable both the cockpit voice recorder and the flight data recorder;

(5) It has an independent power source—

(i) That provides 10 ± 1 minutes of electrical power to operate both the cockpit voice recorder and cockpit-mounted area microphone;

(ii) That is located as close as practicable to the cockpit voice recorder; and

(iii) To which the cockpit voice recorder and cockpit-mounted area microphone are switched automatically in the event that all other power to the cockpit voice recorder is interrupted either by normal shutdown or by any other loss of power to the electrical power bus; and

(6) It is in a separate container from the flight data recorder when both are required. If used to comply with only the cockpit voice recorder requirements, a combination unit may be installed.

(e) The recorder container must be located and mounted to minimize the probability of rupture of the container as a result of crash impact and consequent heat damage to the recorder from fire.

(1) Except as provided in paragraph (e)(2) of this section, the recorder container must be located as far aft as practicable, but need not be outside of the pressurized compartment, and may not be located where aft-mounted engines may crush the container during impact.

(2) If two separate combination digital flight data recorder and cockpit voice recorder units are installed instead of one cockpit voice recorder and one digital flight data recorder, the combination unit that is installed to comply with the cockpit voice recorder requirements may be located near the cockpit.

(f) If the cockpit voice recorder has a bulk erasure device, the installation must be designed to minimize the probability of inadvertent operation and actuation of the device during crash impact.

(g) Each recorder container must:

(1) Be either bright orange or bright yellow;

(2) Have reflective tape affixed to its external surface to facilitate its location under water; and

(3) Have an underwater locating device, when required by the operating rules of this chapter, on or adjacent to the container which is secured in such manner that they are not likely to be separated during crash impact.

[Amdt. 23–35, 53 FR 26142, July 11, 1988, as amended by Amdt. No. 23–58, 73 FR 12562, Mar. 7, 2008]

§ 23.1459 Flight data recorders.

(a) Each flight recorder required by the operating rules of this chapter must be installed so that:

(1) It is supplied with airspeed, altitude, and directional data obtained from sources that meet the accuracy requirements of §§23.1323, 23.1325, and 23.1327, as appropriate;

(2) The vertical acceleration sensor is rigidly attached, and located longitudinally either within the approved center of gravity limits of the airplane, or at a distance forward or aft of these limits that does not exceed 25 percent of the airplane's mean aerodynamic chord;

(3) It receives its electrical power from the bus that provides the maximum reliability for operation of the flight data recorder without jeopardizing service to essential or emergency loads. The flight data recorder must remain powered for as long as possible without jeopardizing emergency

operation of the airplane;

(4) There is an aural or visual means for preflight checking of the recorder for proper recording of data in the storage medium;

(5) Except for recorders powered solely by the engine-driven electrical generator system, there is an automatic means to simultaneously stop a recorder that has a data erasure feature and prevent each erasure feature from functioning, within 10 minutes after crash impact;

(6) Any single electrical failure external to the recorder does not disable both the cockpit voice recorder and the flight data recorder; and

(7) It is in a separate container from the cockpit voice recorder when both are required. If used to comply with only the flight data recorder requirements, a combination unit may be installed. If a combination unit is installed as a cockpit voice recorder to comply with §23.1457(e)(2), a combination unit must be used to comply with this flight data recorder requirement.

(b) Each nonejectable record container must be located and mounted so as to minimize the probability of container rupture resulting from crash impact and subsequent damage to the record from fire. In meeting this requirement the record container must be located as far aft as practicable, but need not be aft of the pressurized compartment, and may not be where aft-mounted engines may crush the container upon impact.

(c) A correlation must be established between the flight recorder readings of airspeed, altitude, and heading and the corresponding readings (taking into account correction factors) of the first pilot's instruments. The correlation must cover the airspeed range over which the airplane is to be operated, the range of altitude to which the airplane is limited, and 360 degrees of heading. Correlation may be established on the ground as appropriate.

(d) Each recorder container must:

(1) Be either bright orange or bright yellow;

(2) Have reflective tape affixed to its external surface to facilitate its location under water; and

(3) Have an underwater locating device, when required by the operating rules of this chapter, on or adjacent to the container which is secured in such a manner that they are not likely to be separated during crash impact.

(e) Any novel or unique design or operational characteristics of the aircraft shall be evaluated to determine if any dedicated parameters must be recorded on flight recorders in addition to or in place of existing requirements.

[Amdt. 23–35, 53 FR 26143, July 11, 1988, as amended by Amdt. No. 23–58, 73 FR 12562, Mar. 7, 2008]

§ 23.1461 Equipment containing high energy rotors.

(a) Equipment, such as Auxiliary Power Units (APU) and constant speed drive units, containing

high energy rotors must meet paragraphs (b), (c), or (d) of this section.

(b) High energy rotors contained in equipment must be able to withstand damage caused by malfunctions, vibration, abnormal speeds, and abnormal temperatures. In addition—

(1) Auxiliary rotor cases must be able to contain damage caused by the failure of high energy rotor blades; and

(2) Equipment control devices, systems, and instrumentation must reasonably ensure that no operating limitations affecting the integrity of high energy rotors will be exceeded in service.

(c) It must be shown by test that equipment containing high energy rotors can contain any failure of a high energy rotor that occurs at the highest speed obtainable with the normal speed control devices inoperative.

(d) Equipment containing high energy rotors must be located where rotor failure will neither endanger the occupants nor adversely affect continued safe flight.

[Amdt. 23–20, 42 FR 36969, July 18, 1977, as amended by Amdt. 23–49, 61 FR 5170, Feb. 9, 1996]

Subpart G—Operating Limitations and Information

§ 23.1501 General.

(a) Each operating limitation specified in §§23.1505 through 23.1527 and other limitations and information necessary for safe operation must be established.

(b) The operating limitations and other information necessary for safe operation must be made available to the crewmembers as prescribed in §§23.1541 through 23.1589.

[Amdt. 23–21, 43 FR 2319, Jan. 16, 1978]

<p>23.1505 Airspeed limitations.</p> <p>(a) The never-exceed speed V_{NE} must be established so that it is:</p> <p>(1) Not less than 0,9 times the minimum value of V_D allowed under section 23.335; and</p> <p>(2) Not more than the lesser of:</p> <p>(i) 0,9 V_D established under section 23.335; or</p> <p>(ii) 0,9 times the maximum speed shown under section 23.251.</p> <p>(b) The maximum structural cruising speed</p>	<p>23.1505 Limitações de velocidade.</p> <p>(a) Deve ser estabelecida a velocidade nunca a ser excedida V_{NE} de modo que ela seja:</p> <p>(1) Não inferior a 0,9 vezes o valor mínimo da V_D permitida nos termos da seção 23.335, e</p> <p>(2) Não mais do que o menor entre:</p> <p>(i) 0,9 V_D estabelecida nos termos da seção 23.335, ou</p> <p>(ii) 0,9 vezes a velocidade máxima indicada na seção 23.251.</p>
---	---

<p>V_{NO} must be established so that it is:</p> <p>(1) Not less than the minimum value of V_C allowed under section 23.335; and</p> <p>(2) Not more than the lesser of:</p> <p>(i) V_C established under section 23.335; or</p> <p>(ii) $0,89 V_{NE}$ established under paragraph (a) of this section.</p> <p>(c)(1) Paragraphs (a) and (b) of this section do not apply to turbine airplanes or to airplanes for which a design diving speed V_D/M_D is established under paragraph 23.335(b)(4). For those airplanes, a maximum operating limit speed (V_{MO}/M_{MO} airspeed or Mach number, whichever is critical at a particular altitude) must be established as a speed that may not be deliberately exceeded in any regime of flight (climb, cruise, or descent) unless a higher speed is authorized for flight test or pilot training operations.</p> <p>(2) V_{MO}/M_{MO} must be established so that it is not greater than the design cruising speed V_C/M_C and so that it is sufficiently below V_D/M_D, or V_{DF}/M_{DF} for jets, and the maximum speed shown under section 23.251 to make it highly improbable that the latter speeds will be inadvertently exceeded in operations.</p> <p>(3) The speed margin between V_{MO}/M_{MO} and V_D/M_D, or V_{DF}/M_{DF} for jets, may not be less than that determined under paragraph 23.335(b), or the speed margin found necessary in the flight tests conducted under section 23.253.</p>	<p>(b) Deve ser estabelecida a velocidade máxima estrutural de cruzeiro V_{NO} de modo que seja:</p> <p>(1) Não inferior ao valor mínimo da V_C permitida nos termos da seção 23.335, e</p> <p>(2) Não mais do que o menor entre:</p> <p>(i) V_C estabelecida nos termos da seção 23.335, ou</p> <p>(ii) $0,89 V_{NE}$ estabelecida no parágrafo (a) desta seção.</p> <p>(c)(1) Os parágrafos (a) e (b) desta seção não se aplicam a aviões impulsionados por motor a turbina ou a aviões para os quais uma velocidade máxima de mergulho de projeto V_D/M_D seja estabelecida nos termos do parágrafo 23.335(b)(4). Para estes aviões, uma velocidade limite máxima em operação (V_{MO}/M_{MO} velocidade ou o número MACH, o que for crítico a uma altitude particular) deve ser estabelecida como uma velocidade que não pode ser deliberadamente excedida em qualquer regime de voo (subida, cruzeiro, ou descida), a menos que uma velocidade maior seja autorizada para ensaios em voo ou operações de treinamento de pilotos.</p> <p>(2) Deve ser estabelecida a V_{MO}/M_{MO} de modo que esta não seja maior do que a velocidade de cruzeiro de projeto V_C/M_C e que seja suficientemente inferior a V_D/M_D, ou V_{DF}/M_{DF} para jatos, e a velocidade máxima indicada nos termos da seção 23.251 de forma a tornar altamente improvável que estas últimas velocidades sejam inadvertidamente excedidas em operação.</p> <p>(3) A margem de velocidade entre V_{MO}/M_{MO} e V_D/M_D, ou V_{DF}/M_{DF} para jatos não pode ser inferior àquela determinada nos termos do parágrafo 23.335(b) ou à margem de velocidade considerada necessária nos ensaios em voo realizados nos termos da seção 23.253.</p>
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13096, Aug. 13, 1969; Amdt. 23-62, 76 FR 75762, Dec. 2, 2011]

§ 23.1507 Operating maneuvering speed.

The maximum operating maneuvering speed, V_O , must be established as an operating limitation. V_O is a selected speed that is not greater than $V_S\sqrt{n}$ established in §23.335(c).

[Doc. No. 26269, 58 FR 42165, Aug. 6, 1993]

§ 23.1511 Flap extended speed.

(a) The flap extended speed V_{FE} must be established so that it is—

(1) Not less than the minimum value of V_F allowed in §23.345(b); and

(2) Not more than V_F established under §23.345(a), (c), and (d).

(b) Additional combinations of flap setting, airspeed, and engine power may be established if the structure has been proven for the corresponding design conditions.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–50, 61 FR 5192, Feb. 9, 1996]

§ 23.1513 Minimum control speed.

The minimum control speed V_{MC} , determined under §23.149, must be established as an operating limitation.

§ 23.1519 Weight and center of gravity.

The weight and center of gravity limitations determined under §23.23 must be established as operating limitations.

§ 23.1521 Powerplant limitations.

(a) General. The powerplant limitations prescribed in this section must be established so that they do not exceed the corresponding limits for which the engines or propellers are type certificated. In addition, other powerplant limitations used in determining compliance with this part must be established.

(b) Takeoff operation. The powerplant takeoff operation must be limited by—

(1) The maximum rotational speed (rpm);

(2) The maximum allowable manifold pressure (for reciprocating engines);

(3) The maximum allowable gas temperature (for turbine engines);

(4) The time limit for the use of the power or thrust corresponding to the limitations established in paragraphs (b)(1) through (3) of this section; and

- (5) The maximum allowable cylinder head (as applicable), liquid coolant and oil temperatures.
- (c) Continuous operation. The continuous operation must be limited by—
- (1) The maximum rotational speed;
 - (2) The maximum allowable manifold pressure (for reciprocating engines);
 - (3) The maximum allowable gas temperature (for turbine engines); and
 - (4) The maximum allowable cylinder head, oil, and liquid coolant temperatures.
- (d) Fuel grade or designation. The minimum fuel grade (for reciprocating engines), or fuel designation (for turbine engines), must be established so that it is not less than that required for the operation of the engines within the limitations in paragraphs (b) and (c) of this section.
- (e) Ambient temperature. For all airplanes except reciprocating engine-powered airplanes of 6,000 pounds or less maximum weight, ambient temperature limitations (including limitations for winterization installations if applicable) must be established as the maximum ambient atmospheric temperature at which compliance with the cooling provisions of §§23.1041 through 23.1047 is shown.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–21, 43 FR 2319, Jan. 16, 1978; Amdt. 23–45, 58 FR 42165, Aug. 6, 1993; Amdt. 23–50, 61 FR 5192, Feb. 9, 1996]

§ 23.1522 Auxiliary power unit limitations.

If an auxiliary power unit is installed, the limitations established for the auxiliary power must be specified in the operating limitations for the airplane.

[Doc. No. 26269, 58 FR 42166, Aug. 6, 1993]

§ 23.1523 Minimum flight crew.

The minimum flight crew must be established so that it is sufficient for safe operation considering—

- (a) The workload on individual crewmembers and, in addition for commuter category airplanes, each crewmember workload determination must consider the following:
- (1) Flight path control,
 - (2) Collision avoidance,
 - (3) Navigation,
 - (4) Communications,

- (5) Operation and monitoring of all essential airplane systems,
- (6) Command decisions, and
- (7) The accessibility and ease of operation of necessary controls by the appropriate crewmember during all normal and emergency operations when at the crewmember flight station;
- (b) The accessibility and ease of operation of necessary controls by the appropriate crewmember; and
- (c) The kinds of operation authorized under §23.1525.

[Amdt. 23–21, 43 FR 2319, Jan. 16, 1978, as amended by Amdt. 23–34, 52 FR 1834, Jan. 15, 1987]

§ 23.1524 Maximum passenger seating configuration.

The maximum passenger seating configuration must be established.

[Amdt. 23–10, 36 FR 2864, Feb. 11, 1971]

§ 23.1525 Kinds of operation.

The kinds of operation authorized (e.g. VFR, IFR, day or night) and the meteorological conditions (e.g. icing) to which the operation of the airplane is limited or from which it is prohibited, must be established appropriate to the installed equipment.

[Doc. No. 26269, 58 FR 42166, Aug. 6, 1993]

<p>23.1527 Maximum operating altitude.</p> <p>(a) The maximum altitude up to which operation is allowed, as limited by flight, structural, powerplant, functional or equipment characteristics, must be established.</p> <p>(b) A maximum operating altitude limitation of not more than 25.000 feet (7.620 m) must be established for pressurized airplanes unless compliance with paragraph 23.775(d) is shown.</p>	<p>23.1527 Altitude máxima de operação.</p> <p>(a) A altitude máxima até a qual a operação é permitida, limitada por características de voo, estruturais, grupo motopropulsor, funcionais ou de equipamentos, deve ser estabelecida.</p> <p>(b) Uma limitação de altitude máxima de operação de não mais que 25.000 pés (7.620 m) deve ser estabelecida para aeronaves pressurizadas, a menos que o cumprimento com o parágrafo 23.775(d) seja demonstrado.</p>
--	--

[Doc. No. 26269, 58 FR 42166, Aug. 6, 1993]

§ 23.1529 Instructions for Continued Airworthiness.

The applicant must prepare Instructions for Continued Airworthiness in accordance with appendix G to this part that are acceptable to the Administrator. The instructions may be incomplete at type certification if a program exists to ensure their completion prior to delivery of the first airplane or issuance of a standard certificate of airworthiness, whichever occurs later.

[Amdt. 23–26, 45 FR 60171, Sept. 11, 1980]

Markings And Placards

§ 23.1541 General.

(a) The airplane must contain—

(1) The markings and placards specified in §§23.1545 through 23.1567; and

(2) Any additional information, instrument markings, and placards required for the safe operation if it has unusual design, operating, or handling characteristics.

(b) Each marking and placard prescribed in paragraph (a) of this section—

(1) Must be displayed in a conspicuous place; and

(2) May not be easily erased, disfigured, or obscured.

(c) For airplanes which are to be certificated in more than one category—

(1) The applicant must select one category upon which the placards and markings are to be based; and

(2) The placards and marking information for all categories in which the airplane is to be certificated must be furnished in the Airplane Flight Manual.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–21, 43 FR 2319, Jan. 16, 1978]

§ 23.1543 Instrument markings: General.

For each instrument—

(a) When markings are on the cover glass of the instrument, there must be means to maintain the correct alignment of the glass cover with the face of the dial; and

(b) Each arc and line must be wide enough and located to be clearly visible to the pilot.

(c) All related instruments must be calibrated in compatible units.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23–50, 61 FR 5192, Feb. 9, 1996]

<p>23.1545 Airspeed indicator.</p> <p>(a) Each airspeed indicator must be marked as specified in paragraph (b) of this section, with the marks located at the corresponding</p>	<p>23.1545 Indicador de velocidade no ar.</p> <p>(a) Cada indicador de velocidade no ar deve estar marcado como especificado no parágrafo (b) desta seção, com as marcações localizadas</p>
--	--

<p>indicated airspeeds.</p> <p>(b) The following markings must be made:</p> <p>(1) For the never-exceed speed V_{NE}, a radial red line.</p> <p>(2) For the caution range, a yellow arc extending from the red line specified in paragraph (b)(1) of this section to the upper limit of the green arc specified in paragraph (b)(3) of this section.</p> <p>(3) For the normal operating range, a green arc with the lower limit at V_{S1} with maximum weight and with landing gear and wing flaps retracted, and the upper limit at the maximum structural cruising speed V_{NO} established under paragraph 23.1505(b).</p> <p>(4) For the flap operating range, a white arc with the lower limit at V_{S0} at the maximum weight, and the upper limit at the flap-extended speed V_{FE} established under section 23.1511.</p> <p>(5) For reciprocating multiengine-powered airplanes of 6.000 pounds (2.722 kg) or less maximum weight, for the speed at which compliance has been shown with paragraph 23.69(b) relating to rate of climb at maximum weight and at sea level, a blue radial line.</p> <p>(6) For reciprocating multiengine-powered airplanes of 6.000 pounds (2.722 kg) or less maximum weight, for the maximum value of minimum control speed, V_{MC}, (one-engine-inoperative) determined under paragraph 23.149(b), a red radial line.</p> <p>(c) If V_{NE} or V_{NO} vary with altitude, there must be means to indicate to the pilot the appropriate limitations throughout the operating altitude range.</p> <p>(d) Paragraphs (b)(1) through (b)(3) and paragraph (c) of this section do not apply to airplanes for which a maximum operating speed V_{MO}/M_{MO} is established under paragraph</p>	<p>nas velocidades indicadas correspondentes.</p> <p>(b) As seguintes marcações devem ser feitas:</p> <p>(1) Para a velocidade nunca exceder (V_{NE}), uma linha radial vermelha.</p> <p>(2) Para o intervalo de advertência, um arco amarelo a partir da linha vermelha especificada no parágrafo (b)(1) desta seção até o limite superior do arco verde especificado no parágrafo (b)(3) desta seção.</p> <p>(3) Para o intervalo de operação normal, um arco verde com o limite inferior na V_{S1} com peso máximo e trem de pouso e flapes das asas retraídos, e com o limite superior na velocidade máxima estrutural de cruzeiro V_{NO} estabelecida segundo o parágrafo 23.1505(b).</p> <p>(4) Para o intervalo de operação do flap, um arco branco com o limite inferior na V_{S0} no peso máximo, e o limite superior na velocidade de flapes estendidos V_{FE} estabelecida na seção 23.1511.</p> <p>(5) Para aviões de motor convencional multimotoras de 6.000 libras (2.722 kg) ou menos de peso máximo, uma linha radial azul para a velocidade na qual o cumprimento com o parágrafo 23.69(b) foi demonstrado para a razão de subida no peso máximo e ao nível do mar.</p> <p>(6) Para aviões multimotores de motor convencional de 6.000 libras (2.722 kg) ou menos de peso máximo, uma linha radial vermelha para o valor máximo da velocidade mínima de controle, V_{MC}, (um motor inoperante) determinada de acordo com o parágrafo 23.149(b).</p> <p>(c) Se a V_{NE} ou a V_{NO} variam com a altitude, deve haver um meio de indicar para o piloto as limitações apropriadas ao longo do envelope de altitude de operação.</p> <p>(d) Os parágrafos (b)(1) a (b)(3) e o parágrafo (c) desta seção não se aplicam a aviões para as</p>
--	---

<p>23.1505(c). For those airplanes, there must either be a maximum allowable airspeed indication showing the variation of V_{MO}/M_{MO} with altitude or compressibility limitations (as appropriate), or a radial red line marking for V_{MO}/M_{MO} must be made at lowest value of V_{MO}/M_{MO} established for any altitude up to the maximum operating altitude for the airplane.</p>	<p>quais a velocidade máxima de operação V_{MO}/M_{MO} é estabelecida de acordo com o parágrafo 23.1505(c). Para esses aviões, deve existir uma indicação de velocidade máxima do ar permitida mostrando a variação de V_{MO}/M_{MO} com a altitude ou limitações de compressibilidade (conforme apropriado), ou uma marcação com linha radial vermelha para V_{MO}/M_{MO} deve ser feita no menor valor de V_{MO}/M_{MO} estabelecido para todas as altitudes até a altitude máxima de operação do avião.</p>
--	--

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-3, 30 FR 14240, Nov. 13, 1965; Amdt. 23-7, 34 FR 13097, Aug. 13, 1969; Amdt. 23-23, 43 FR 50593, Oct. 30, 1978; Amdt. 23-50, 61 FR 5193, Feb. 9, 1996; Amdt. 23-62, 76 FR 75762, Dec. 2, 2011]

§ 23.1547 Magnetic direction indicator.

- (a) A placard meeting the requirements of this section must be installed on or near the magnetic direction indicator.
- (b) The placard must show the calibration of the instrument in level flight with the engines operating.
- (c) The placard must state whether the calibration was made with radio receivers on or off.
- (d) Each calibration reading must be in terms of magnetic headings in not more than 30 degree increments.
- (e) If a magnetic nonstabilized direction indicator can have a deviation of more than 10 degrees caused by the operation of electrical equipment, the placard must state which electrical loads, or combination of loads, would cause a deviation of more than 10 degrees when turned on.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-20, 42 FR 36969, July 18, 1977]

§ 23.1549 Powerplant and auxiliary power unit instruments.

For each required powerplant and auxiliary power unit instrument, as appropriate to the type of instruments—

- (a) Each maximum and, if applicable, minimum safe operating limit must be marked with a red radial or a red line;
- (b) Each normal operating range must be marked with a green arc or green line, not extending beyond the maximum and minimum safe limits;
- (c) Each takeoff and precautionary range must be marked with a yellow arc or a yellow line; and

(d) Each engine, auxiliary power unit, or propeller range that is restricted because of excessive vibration stresses must be marked with red arcs or red lines.

[Amdt. 23–12, 41 FR 55466, Dec. 20, 1976, as amended by Amdt. 23–28, 47 FR 13315, Mar. 29, 1982; Amdt. 23–45, 58 FR 42166, Aug. 6, 1993]

§ 23.1551 Oil quantity indicator.

Each oil quantity indicator must be marked in sufficient increments to indicate readily and accurately the quantity of oil.

§ 23.1553 Fuel quantity indicator.

A red radial line must be marked on each indicator at the calibrated zero reading, as specified in §23.1337(b)(1).

[Doc. No. 27807, 61 FR 5193, Feb. 9, 1996]

<p>23.1555 Control markings.</p> <p>(a) Each cockpit control, other than primary flight controls and simple push button type starter switches, must be plainly marked as to its function and method of operation.</p> <p>(b) Each secondary control must be suitably marked.</p> <p>(c) For powerplant fuel controls:</p> <p>(1) Each fuel tank selector control must be marked to indicate the position corresponding to each tank and to each existing cross feed position;</p> <p>(2) If safe operation requires the use of any tanks in a specific sequence, that sequence must be marked on or near the selector for those tanks;</p> <p>(3) The conditions under which the full amount of usable fuel in any restricted usage fuel tank can safely be used must be stated on a placard adjacent to the selector valve for that tank; and</p> <p>(4) Each valve control for any engine of a multiengine airplane must be marked to indicate the position corresponding to each</p>	<p>23.1555 Marcas de comando.</p> <p>(a) Cada comando da cabine de voo, diferente dos comandos primários de voo e dos interruptores de partida do tipo simples de apertar, deve ser claramente marcado conforme a sua função e método de operação.</p> <p>(b) Cada comando secundário deve ser adequadamente marcado.</p> <p>(c) Para comandos de combustível do sistema motopropulsor:</p> <p>(1) Cada comando seletor do tanque de combustível deve ser marcado para indicar a posição correspondente a cada tanque e a cada posição existente de alimentação cruzada;</p> <p>(2) Se operação segura requerer o uso de quaisquer tanques em uma sequência específica, aquela sequência deve ser marcada no seletor ou perto dele para aqueles tanques;</p> <p>(3) As condições, sob as quais a quantidade total de combustível utilizável em qualquer tanque de combustível com uso restrito pode ser usada com segurança, devem ser definidas em um placar adjacente à válvula do seletor para aquele tanque; e</p>
--	---

<p>engine controlled.</p> <p>(d) Usable fuel capacity must be marked as follows:</p> <p>(1) For fuel systems having no selector controls, the usable fuel capacity of the system must be indicated at the fuel quantity indicator.</p> <p>(2) For fuel systems having selector controls, the usable fuel capacity available at each selector control position must be indicated near the selector control.</p> <p>(3) For fuel systems having a calibrated fuel quantity indication system complying with paragraph 23.1337(b)(1) and accurately displaying the actual quantity of usable fuel in each selectable tank, no fuel capacity placards outside of the fuel quantity indicator are required.</p> <p>(e) For accessory, auxiliary, and emergency controls:</p> <p>(1) If retractable landing gear is used, the indicator required by section 23.729 of this RBAC must be marked so that the pilot can, at any time, ascertain that the wheels are secured in the extreme positions; and</p> <p>(2) Each emergency control must be red and must be marked as to method of operation. No control other than an emergency control, or a control that serves an emergency function in addition to its other functions, shall be this color.</p>	<p>(4) Cada comando de válvula para qualquer motor de um avião com mais de um motor deve ser marcado para indicar a posição correspondente a cada motor comandado.</p> <p>(d) A capacidade de combustível utilizável deve ser marcada como segue:</p> <p>(1) Para sistemas de combustível que não têm nenhum comando seletor, a capacidade de combustível utilizável do sistema deve ser indicada no indicador de quantidade de combustível.</p> <p>(2) Para sistemas de combustível que têm comandos seletores, a capacidade de combustível utilizável disponível em cada posição do comando seletor deve ser indicada perto do comando seletor.</p> <p>(3) Para sistemas de combustível que têm um sistema calibrado de indicação da quantidade de combustível que cumpre com o parágrafo 23.1337(b)(1) e que mostra com precisão a quantidade real de combustível utilizável em cada tanque selecionável, não são exigidos placares de capacidade de combustível fora do indicador da quantidade de combustível.</p> <p>(e) Para comandos acessórios, auxiliares e de emergência:</p> <p>(1) Se trem de pouso retrátil é usado, o indicador requerido pela seção 23.729 deve ser marcado de maneira que o piloto possa, a qualquer tempo, se certificar que as rodas estão firmes nas posições extremas; e</p> <p>(2) Cada comando de emergência deve ser vermelho e deve ser marcado conforme o método de operação. Nenhum comando diferente de um comando de emergência, ou nenhum comando que atende a uma função de emergência em adição às suas outras funções, deve ser desta cor.</p>
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-21, 43 FR 2319, Jan. 16, 1978; Amdt. 23-50, 61 FR 5193, Feb. 9, 1996; Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

§ 23.1557 Miscellaneous markings and placards.

(a) Baggage and cargo compartments, and ballast location. Each baggage and cargo compartment, and each ballast location, must have a placard stating any limitations on contents, including weight, that are necessary under the loading requirements.

(b) Seats. If the maximum allowable weight to be carried in a seat is less than 170 pounds, a placard stating the lesser weight must be permanently attached to the seat structure.

(c) Fuel, oil, and coolant filler openings. The following apply:

(1) Fuel filler openings must be marked at or near the filler cover with—

(i) For reciprocating engine-powered airplanes—

(A) The word “Avgas”; and

(B) The minimum fuel grade.

(ii) For turbine engine-powered airplanes—

(A) The words “Jet Fuel”; and

(B) The permissible fuel designations, or references to the Airplane Flight Manual (AFM) for permissible fuel designations.

(iii) For pressure fueling systems, the maximum permissible fueling supply pressure and the maximum permissible defueling pressure.

(2) Oil filler openings must be marked at or near the filler cover with the word “Oil” and the permissible oil designations, or references to the Airplane Flight Manual (AFM) for permissible oil designations.

(3) Coolant filler openings must be marked at or near the filler cover with the word “Coolant”.

(d) Emergency exit placards. Each placard and operating control for each emergency exit must be red. A placard must be near each emergency exit control and must clearly indicate the location of that exit and its method of operation.

(e) The system voltage of each direct current installation must be clearly marked adjacent to its external power connection.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; as amended by Amdt. 23–21, 42 FR 15042, Mar. 17, 1977; Amdt. 23–23, 43 FR 50594, Oct. 30, 1978; Amdt. 23–45, 58 FR 42166, Aug. 6, 1993; 73 FR 35063, June 20, 2008]

23.1559 Operating limitations placard.	23.1559 Placar de limitações operacionais.
(a) There must be a placard in clear view of the	(a) Deve haver um placar claramente visível

<p>pilot stating:</p> <p>(1) That the airplane must be operated in accordance with the Airplane Flight Manual; and</p> <p>(2) The certification category of the airplane to which the placards apply.</p> <p>(b) For airplanes certificated in more than one category, there must be a placard in clear view of the pilot stating that other limitations are contained in the Airplane Flight Manual.</p> <p>(c) There must be a placard in clear view of the pilot that specifies the kind of operations to which the operation of the airplane is limited or from which it is prohibited under section 23.1525.</p> <p>(d) The placard(s) required by this section need not be lighted.</p>	<p>para o piloto informando:</p> <p>(1) Que o avião deve ser operado de acordo com o manual de voo aprovado; e</p> <p>(2) A categoria de certificação do avião para a qual o placar se aplica.</p> <p>(b) Para aviões certificados em mais de uma categoria, deve haver um placar claramente visível para o piloto informando que outras limitações estão contidas no manual de voo aprovado.</p> <p>(c) Deve haver um placar claramente visível para o piloto que especifique os tipos de operação para os quais a operação do avião é limitada ou proibida de acordo com o requisito da seção 23.1525.</p> <p>(d) Placares requeridos por esta seção não precisam ser iluminados.</p>
---	---

[Doc. No. 27807, 61 FR 5193, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

§ 23.1561 Safety equipment.

- (a) Safety equipment must be plainly marked as to method of operation.
- (b) Stowage provisions for required safety equipment must be marked for the benefit of occupants.

<p>23.1563 Airspeed placard.</p> <p>There must be an airspeed placard in clear view of the pilot and as close as practicable to the airspeed indicator. This placard must list:</p> <p>(a) The operating maneuvering speed, V_O; and</p> <p>(b) The maximum landing gear operating speed V_{LO}.</p> <p>(c) For reciprocating multiengine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight, and turbine engine-powered airplanes, the maximum value of the minimum control speed, V_{MC} (one-engine-inoperative)</p>	<p>23.1563 Placar de velocidade no ar.</p> <p>Deve haver um placar de velocidade no ar claramente visível pelo piloto e tão perto quanto for praticável do indicador de velocidade no ar. Esse placar deve listar:</p> <p>(a) A velocidade operacional de manobra, V_O; e</p> <p>(b) A velocidade máxima de operação do trem de pouso, V_{LO}.</p> <p>(c) Para aviões multimotores com motores convencionais com mais de 6.000 libras (2.722 kg) de peso máximo, e aviões de motor à turbina, o valor máximo da velocidade mínima</p>
--	--

<p>determined under paragraph 23.149(b).</p> <p>(d) The airspeed placard(s) required by this section need not be lighted if the landing gear operating speed is indicated on the airspeed indicator or other lighted area such as the landing gear control and the airspeed indicator has features such as low speed awareness that provide ample warning prior to V_{MC}.</p>	<p>de controle, V_{MC} (com um motor inoperante) determinada de acordo com o parágrafo 23.149(b).</p> <p>(d) O placar de velocidade no ar requerido por esta seção não precisa ser iluminado se a velocidade de operação do trem de pouso é mostrada no indicador de velocidade ou outra área iluminada tal como o controle do trem de pouso, e o indicador de velocidade tem funcionalidades como alerta de baixa velocidade que provê amplo alerta antes da V_{MC}.</p>
---	---

[[Amdt. 23-7, 34 FR 13097, Aug. 13, 1969, as amended by Amdt. 23-45, 58 FR 42166, Aug. 6, 1993; Amdt. 23-50, 61 FR 5193, Feb. 9, 1996; Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]]

<p>23.1567 Flight maneuver placard.</p> <p>(a) For normal category airplanes, there must be a placard in front of and in clear view of the pilot stating: “No acrobatic maneuvers, including spins, approved.”</p> <p>(b) For utility category airplanes, there must be:</p> <p>(1) A placard in clear view of the pilot stating: “Acrobatic maneuvers are limited to the following _____;” (list approved maneuvers and the recommended entry speed for each); and</p> <p>(2) For those airplanes that do not meet the spin requirements for acrobatic category airplanes, an additional placard in clear view of the pilot stating: “Spins Prohibited.”</p> <p>(c) For acrobatic category airplanes, there must be a placard in clear view of the pilot listing the approved acrobatic maneuvers and the recommended entry airspeed for each. If inverted flight maneuvers are not approved, the placard must bear a notation to this effect.</p> <p>(d) For acrobatic category airplanes and utility category airplanes approved for spinning, there must be a placard in clear view of the pilot:</p>	<p>23.1567 Placar de manobras em voo.</p> <p>(a) Para aviões da categoria normal, deve existir um placar na frente do piloto e com visão desobstruída, informando: "Nenhuma manobra acrobática, inclusive parafuso, é aprovada".</p> <p>(b) Para aviões da categoria utilidade, deve existir:</p> <p>(1) Um placar claramente visível pelo piloto informando: "Manobras acrobáticas são limitadas às seguintes _____;" (lista de manobras aprovadas e velocidade de entrada recomendada para cada uma delas); e</p> <p>(2) Para aqueles aviões que não cumprem os requisitos de parafuso dos aviões da categoria acrobática, um placar adicional com visão desobstruída pelo piloto informando: "Proibidos parafusos".</p> <p>(c) Para aviões da categoria acrobática, deve haver um placar claramente visível pelo piloto listando as manobras acrobáticas aprovadas e a velocidade de entrada recomendada para cada uma delas. Se não são aprovadas manobras de voo invertido, o placar deve trazer uma informação neste sentido.</p> <p>(d) Para aviões da categoria acrobática e aviões</p>
--	--

<p>(1) Listing the control actions for recovery from spinning maneuvers; and</p> <p>(2) Stating that recovery must be initiated when spiral characteristics appear, or after not more than six turns or not more than any greater number of turns for which the airplane has been certificated.</p> <p>(e) The placard(s) required by this section need not be lighted.</p>	<p>da categoria utilidade aprovados para parafuso, deve haver um placar claramente visível pelo piloto:</p> <p>(1) Listando as ações nos comandos para recuperação das manobras de parafuso; e</p> <p>(2) Informando que a recuperação deve ser iniciada quando aparecerem características de espiral, ou após não mais que seis voltas ou não mais que qualquer número maior de voltas para o qual o avião tenha sido certificado.</p> <p>(e) Os placares requeridos por esta seção não precisam ser iluminados.</p>
---	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964; 30 FR 258, Jan. 9, 1965, as amended by Amdt. 23-13, 37 FR 20023, Sept. 23, 1972; Amdt. 23-21, 43 FR 2319, Jan. 16, 1978; Amdt. 23-50, 61 FR 5193, Feb. 9, 1996; Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

Airplane Flight Manual and Approved Manual Material

§ 23.1581 General.

(a) Furnishing information. An Airplane Flight Manual must be furnished with each airplane, and it must contain the following:

- (1) Information required by §§23.1583 through 23.1589.
- (2) Other information that is necessary for safe operation because of design, operating, or handling characteristics.
- (3) Further information necessary to comply with the relevant operating rules.

(b) Approved information. (1) Except as provided in paragraph (b)(2) of this section, each part of the Airplane Flight Manual containing information prescribed in §§23.1583 through 23.1589 must be approved, segregated, identified and clearly distinguished from each unapproved part of that Airplane Flight Manual.

(2) The requirements of paragraph (b)(1) of this section do not apply to reciprocating engine-powered airplanes of 6,000 pounds or less maximum weight, if the following is met:

- (i) Each part of the Airplane Flight Manual containing information prescribed in §23.1583 must be limited to such information, and must be approved, identified, and clearly distinguished from each other part of the Airplane Flight Manual.
- (ii) The information prescribed in §§23.1585 through 23.1589 must be determined in accordance with the applicable requirements of this part and presented in its entirety in a manner acceptable to the Administrator.

(3) Each page of the Airplane Flight Manual containing information prescribed in this section must be of a type that is not easily erased, disfigured, or misplaced, and is capable of being inserted in a manual provided by the applicant, or in a folder, or in any other permanent binder.

(c) The units used in the Airplane Flight Manual must be the same as those marked on the appropriate instruments and placards.

(d) All Airplane Flight Manual operational airspeeds, unless otherwise specified, must be presented as indicated airspeeds.

(e) Provision must be made for stowing the Airplane Flight Manual in a suitable fixed container which is readily accessible to the pilot.

(f) Revisions and amendments. Each Airplane Flight Manual (AFM) must contain a means for recording the incorporation of revisions and amendments.

[Amdt. 23–21, 43 FR 2319, Jan. 16, 1978, as amended by Amdt. 23–34, 52 FR 1834, Jan. 15, 1987; Amdt. 23–45, 58 FR 42166, Aug. 6, 1993; Amdt. 23–50, 61 FR 5193, Feb. 9, 1996]

23.1583 Operating limitations.	23.1583 Limitações Operacionais.
<p>The Airplane Flight Manual must contain operating limitations determined under this RBAC 23, including the following:</p> <p>(a) Airspeed limitations. The following information must be furnished:</p> <p>(1) Information necessary for the marking of the airspeed limits on the indicator as required in section 23.1545, and the significance of each of those limits and of the color coding used on the indicator.</p> <p>(2) The speeds V_{MC}, V_O, V_{LE}, and V_{LO}, if established, and their significance.</p> <p>(3) In addition, for turbine powered commuter category airplanes:</p> <p>(i) The maximum operating limit speed, V_{MO}/M_{MO} and a statement that this speed must not be deliberately exceeded in any regime of flight (climb, cruise or descent) unless a higher speed is authorized for flight test or pilot training;</p> <p>(ii) If an airspeed limitation is based upon compressibility effects, a statement to this</p>	<p>O manual de voo aprovado (<i>Airplane Flight Manual</i> - AFM) deve conter limites operacionais estabelecidos segundo este RBAC 23, incluindo o seguinte:</p> <p>(a) Limitações de velocidade. Devem ser fornecidas as seguintes informações:</p> <p>(1) Informação necessária para a marcação dos limites de velocidade no indicador, conforme exigido na seção 23.1545, e o significado de cada um desses limites e do código de cores utilizado no indicador.</p> <p>(2) As velocidades V_{MC}, V_O, V_{LE}, e V_{LO}, se estabelecidas, e seu significado.</p> <p>(3) Adicionalmente, para aviões da categoria transporte regional, propulsados por motor a turbina:</p> <p>(i) O limite de velocidade máxima operacional, V_{MO}/M_{MO} e uma declaração de que essa velocidade não pode ser deliberadamente excedida em nenhum regime regime de voo (subida, cruzeiro ou descida), a menos que uma velocidade mais elevada seja autorizada para</p>

<p>effect and information as to any symptoms, the probable behavior of the airplane, and the recommended recovery procedures; and</p> <p>(iii) The airspeed limits must be shown in terms of V_{MO}/M_{MO} instead of V_{NO} and V_{NE}.</p> <p>(b) Powerplant limitations. The following information must be furnished:</p> <p>(1) Limitations required by section 23.1521.</p> <p>(2) Explanation of the limitations, when appropriate.</p> <p>(3) Information necessary for marking the instruments required by sections 23.1549 through 23.1553.</p> <p>(c) Weight. The airplane flight manual must include:</p> <p>(1) The maximum weight; and</p> <p>(2) The maximum landing weight, if the design landing weight selected by the applicant is less than the maximum weight.</p> <p>(3) For each of the following normal, utility, and acrobatic category airplanes: (1) reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight, (2) single-engine turbines, and (3) multiengine turbines of 6.000 pounds (2.722 kg) or less maximum weight, performance operating limitations as follows:</p> <p>(i) The maximum takeoff weight for each airport altitude and ambient temperature within the range selected by the applicant at which the airplane complies with the climb requirements of paragraphs 23.63(c)(1)(i), (c)(2)(i), or (c)(3)(i), as appropriate.</p> <p>(ii) The maximum landing weight for each airport altitude and ambient temperature within the range selected by the applicant at which the airplane complies with the climb requirements of paragraphs 23.63(c)(1)(ii), (c)(2)(ii), or</p>	<p>ensaios em voo ou treinamento de pilotos;</p> <p>(ii) Se uma limitação de velocidade for baseada em efeitos de compressibilidade, uma declaração sobre este efeito e informações sobre quaisquer sintomas, o comportamento provável do avião, e os procedimentos de recuperação recomendados; e</p> <p>(iii) Os limites de velocidade devem ser exibidos em termos de V_{MO}/M_{MO}, em vez de V_{NO} e V_{NE}.</p> <p>(b) Limitações de grupo motopropulsor. Devem ser fornecidas as seguintes informações:</p> <p>(1) Limitações exigidas pela seção 23.1521.</p> <p>(2) Explicação das limitações, quando apropriado.</p> <p>(3) Informações necessárias para marcar os instrumentos exigidas pelas seções 23.1549 a 23.1553.</p> <p>(c) Peso. O manual de voo aprovado deve incluir:</p> <p>(1) O peso máximo; e</p> <p>(2) O peso máximo de pouso, se o peso de pouso de projeto selecionado pelo requerente for menor que o peso máximo.</p> <p>(3) Para todos os seguintes aviões das categorias normal, utilidade e acrobática: (1) aviões propulsados a motor convencional com peso máximo maior do que de 6.000 libras (2.722 kg), (2) aviões propulsados por um motor a turbina, e (3) aviões multimotores propulsados à turbina com 6.000 libras (2.722 kg) ou menos de peso máximo, as limitações operacionais de desempenho da seguinte forma:</p> <p>(i) O peso máximo de decolagem para cada altitude de aeródromo e temperatura ambiente, no intervalo selecionado pelo requerente, no</p>
---	---

<p>(c)(3)(ii), as appropriate.</p> <p>(4) For normal, utility, and acrobatic category multiengine turbines over 6.000 pounds (2.722 kg) and commuter category airplanes, the maximum takeoff weight for each airport altitude and ambient temperature within the range selected by the applicant at which:</p> <p>(i) The airplane complies with the climb requirements of paragraphs 23.63(d)(1)(i), or (d)(2)(i), as appropriate; and</p> <p>(ii) The accelerate-stop distance determined under section 23.55 is equal to the available runway length plus the length of any stopway, if utilized; and either:</p> <p>(iii) The takeoff distance determined under paragraph 23.59(a) is equal to the available runway length; or</p> <p>(iv) At the option of the applicant, the takeoff distance determined under paragraph 23.59(a) is equal to the available runway length plus the length of any clearway and the takeoff run determined under paragraph 23.59(b) is equal to the available runway length.</p> <p>(5) For normal, utility, and acrobatic category multiengine turbines over 6.000 pounds (2.722 kg) and commuter category airplanes, the maximum landing weight for each airport altitude within the range selected by the applicant at which:</p> <p>(i) The airplane complies with the climb requirements of paragraphs 23.63(d)(1)(ii) or (d)(2)(ii), as appropriate for ambient temperatures within the range selected by the applicant; and</p> <p>(ii) The landing distance determined under section 23.75 for standard temperatures is equal to the available runway length.</p> <p>(6) The maximum zero wing fuel weight, where relevant, as established in accordance</p>	<p>qual o avião cumpre com os requisitos de subida do parágrafos 23.63(c)(1)(i), (c)(2)(i), ou (c)(3)(i), como apropriado.</p> <p>(ii) O peso máximo de pouso para cada altitude de aeródromo e temperatura ambiente, no intervalo selecionado pelo requerente, no qual o avião cumpre com os requisitos de subida do parágrafos 23.63(c)(1)(ii), (c)(2)(ii), ou (c)(3)(ii), como apropriado.</p> <p>(4) para aviões multimotores à turbina das categorias normal, utilidade, e acrobática acima de 6.000 libras (2.722 kg) e para aviões da categoria transporte regional, o peso máximo de decolagem para cada altitude de aeródromo e temperatura ambiente, no intervalo selecionado pelo requerente no qual:</p> <p>(i) o avião cumpre com os requisitos de subida do parágrafos 23.63(d)(1)(i), ou (d)(2)(i), como apropriado; e</p> <p>(ii) A distância de aceleração e parada determinada nos termos da seção 23.55 seja igual ao comprimento de pista disponível, mais o comprimento de qualquer stopway, se utilizada; e</p> <p>(iii) A distância de decolagem determinada nos termos do parágrafo 23.59(a) seja igual ao comprimento de pista disponível, ou</p> <p>(iv) Seguindo escolha do requerente, a distância de decolagem determinada nos termos do parágrafo 23.59(a) seja igual ao comprimento de pista disponível, mais o comprimento de qualquer clearway e a corrida de decolagem determinada nos termos do parágrafo 23.59(b) seja igual ao comprimento de pista disponível.</p> <p>(5) Para aviões multimotores a turbina das categorias normal, utilidade, e acrobática acima de 6.000 libras (2.722 kg) e para aviões da categoria transporte regional, o peso máximo para pouso para cada altitude de aeródromo no intervalo selecionado pelo requerente no qual:</p>
--	---

<p>with section 23.343.</p> <p>(d) Center of gravity. The established center of gravity limits.</p> <p>(e) Maneuvers. The following authorized maneuvers, appropriate airspeed limitations, and unauthorized maneuvers, as prescribed in this section.</p> <p>(1) Normal category airplanes. No acrobatic maneuvers, including spins, are authorized.</p> <p>(2) Utility category airplanes. A list of authorized maneuvers demonstrated in the type flight tests, together with recommended entry speeds and any other associated limitations. No other maneuver is authorized.</p> <p>(3) Acrobatic category airplanes. A list of approved flight maneuvers demonstrated in the type flight tests, together with recommended entry speeds and any other associated limitations.</p> <p>(4) Acrobatic category airplanes and utility category airplanes approved for spinning. Spin recovery procedure established to show compliance with paragraph 23.221(c).</p> <p>(5) Commuter category airplanes. Maneuvers are limited to any maneuver incident to normal flying, stalls, (except whip stalls) and steep turns in which the angle of bank is not more than 60 degrees.</p> <p>(f) Maneuver load factor. The positive limit load factors in g's, and, in addition, the negative limit load factor for acrobatic category airplanes.</p> <p>(g) Minimum flight crew. The number and functions of the minimum flight crew determined under section 23.1523.</p> <p>(h) Kinds of operation. A list of the kinds of operation to which the airplane is limited or from which it is prohibited under section 23.1525, and also a list of installed equipment</p>	<p>(i) o avião esteja em conformidade com os requisitos de subida do parágrafos 23.63(d)(1)(ii) ou (d)(2)(ii), como apropriado para temperatura ambiente no intervalo selecionado pelo requerente; e</p> <p>(ii) A distância de pouso determinada nos termos da seção 23.75 para temperaturas padrão seja igual ao comprimento de pista disponível.</p> <p>(6) O peso máximo com zero combustível na asa, quando relevante, conforme estabelecido de acordo com a seção 23.343.</p> <p>(d) Centro de gravidade. Os limites estabelecidos para o centro de gravidade.</p> <p>(e) Manobras. As seguintes manobras autorizadas, limitações adequadas de velocidade e manobras não autorizadas, conforme prescrito nesta seção.</p> <p>(1) aviões da categoria normal. Não estão autorizadas manobra acrobática, incluindo parafusos.</p> <p>(2) aviões da categoria utilidade. Uma lista de manobras autorizadas demonstradas nos ensaios em voo de certificação, juntamente com velocidades de entrada recomendadas e quaisquer outras limitações associadas. Nenhuma outra manobra é autorizada.</p> <p>(3) aviões da categoria acrobática. Uma lista de manobras de voo aprovadas demonstradas nos ensaios em voo de certificação, juntamente com velocidades de entrada recomendadas e quaisquer outras limitações associadas.</p> <p>(4) aviões da categoria acrobática e aviões da categoria utilidade aprovados para parafuso. Procedimento de recuperação de parafuso estabelecido para demonstrar cumprimento com o parágrafo 23.221(c).</p> <p>(5) aviões da categoria transporte regional. Manobras estão limitadas a qualquer manobra incidente para voo normal, estóis, (exceto</p>
--	---

that affects any operating limitation and identification as to the equipment's required operational status for the kinds of operation for which approval has been given.

(i) Maximum operating altitude. The maximum altitude established under section 23.1527.

(j) Maximum passenger seating configuration. The maximum passenger seating configuration.

(k) Allowable lateral fuel loading. The maximum allowable lateral fuel loading differential, if less than the maximum possible.

(l) Baggage and cargo loading. The following information for each baggage and cargo compartment or zone:

(1) The maximum allowable load; and

(2) The maximum intensity of loading.

(m) Systems. Any limitations on the use of airplane systems and equipment.

(n) Ambient temperatures. Where appropriate, maximum and minimum ambient air temperatures for operation.

(o) Smoking. Any restrictions on smoking in the airplane.

(p) Types of surface. A statement of the types of surface on which operations may be conducted. (See paragraphs 23.45(g) and 23.1587 (a)(4), (c)(2), and (d)(4)).

estóis whip) e curvas acentuadas nas quais o ângulo de inclinação não seja superior a 60 graus.

(f) Fator de carga de manobra. Os limites positivos de fator de carga em g (aceleração da gravidade) e, adicionalmente, o limite negativo de fator de carga para aviões categoria acrobática.

(g) Tripulação Mínima. O número e as funções da tripulação mínima determinados segundo a seção 23.1523.

(h) Tipos de operação. Uma lista dos tipos de operação aos quais o avião é limitado ou nos quais seja proibido operar nos termos da seção 23.1525, e também uma lista de equipamentos instalados, que afetem qualquer limitação operacional e identificação do estado operacional exigido dos equipamentos, para os tipos de operação para os quais o avião foi aprovado.

(i) Altitude máxima de operação. A altitude máxima estabelecida segundo a seção 23.1527.

(j) Configuração máxima de assentos de passageiros. A configuração máxima de assentos de passageiros.

(k) Carregamento lateral de combustível permitido. O diferencial máximo de carregamento lateral de combustível permitido, se inferior ao máximo possível.

(l) Carregamento de bagagem e carga. As seguintes informações para cada zona ou compartimento de bagagem e carga:

(1) A carga máxima permitida; e

(2) A intensidade de carregamento máxima.

(m) Sistemas. Quaisquer limitações sobre o uso de equipamentos e sistemas do avião.

(n) Temperaturas ambiente. Caso apropriado, máximos e mínimos de temperaturas ambiente

	<p>do ar para a operação.</p> <p>(o) Fumo. Quaisquer restrições a fumar no avião.</p> <p>(p) Tipos de superfície. Uma declaração dos tipos de superfície nas quais as operações podem ser realizadas. (Veja os parágrafos 23.45(g) e os 23.1587(a)(4), (c)(2), e (d)(4)).</p>
--	---

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13097, Aug. 13, 1969; Amdt. 23-10, 36 FR 2864, Feb. 11, 1971; Amdt. 23-21, 43 FR 2320, Jan. 16, 1978; Amdt. 23-23, 43 FR 50594, Oct. 30, 1978; Amdt. 23-34, 52 FR 1834, Jan. 15, 1987; Amdt. 23-45, 58 FR 42166, Aug. 6, 1993; Amdt. 23-50, 61 FR 5193, Feb. 9, 1996; Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

<p>23.1585 Operating procedures.</p> <p>(a) For all airplanes, information concerning normal, abnormal (if applicable), and emergency procedures and other pertinent information necessary for safe operation and the achievement of the scheduled performance must be furnished, including:</p> <p>(1) An explanation of significant or unusual flight or ground handling characteristics;</p> <p>(2) The maximum demonstrated values of crosswind for takeoff and landing, and procedures and information pertinent to operations in crosswinds;</p> <p>(3) A recommended speed for flight in rough air. This speed must be chosen to protect against the occurrence, as a result of gusts, of structural damage to the airplane and loss of control (for example, stalling);</p> <p>(4) Procedures for restarting any turbine engine in flight, including the effects of altitude; and</p> <p>(5) Procedures, speeds, and configuration(s) for making a normal approach and landing, in accordance with sections 23.73 and 23.75, and a transition to the balked landing condition.</p> <p>(6) For seaplanes and amphibians, water handling procedures and the demonstrated</p>	<p>23.1585 Procedimentos operacionais.</p> <p>(a) Devem ser fornecidas, para todos os aviões, as informações relativas a procedimentos normais, anormais (se aplicável) e de emergência. Também deverão ser fornecidas outras informações pertinentes necessárias para uma operação segura e para a realização do desempenho previsto, incluindo:</p> <p>(1) Uma explicação das características significativas ou incomuns de voo ou características de uso em solo;</p> <p>(2) Os valores máximos de vento cruzado demonstrados para decolagem e pouso, e os procedimentos e informações pertinentes às operações em vento cruzado;</p> <p>(3) A velocidade recomendada para o voo em ar turbulento. Esta velocidade deve ser escolhida para proteger contra a ocorrência de danos estruturais no avião e perda de controle (por exemplo, em estóis), como resultado de rajada;</p> <p>(4) Procedimentos para nova partida no motor para qualquer motor à turbina em voo, incluindo os efeitos da altitude, e</p> <p>(5) Procedimentos, velocidades e configurações para executar aproximação e pouso normais, de acordo com as seções 23.73 e 23.75, e uma</p>
---	---

<p>wave height.</p> <p>(b) In addition to paragraph (a) of this section, for all single-engine airplanes, the procedures, speeds, and configuration(s) for a glide following engine failure, in accordance with section 23.71 and the subsequent forced landing, must be furnished.</p> <p>(c) In addition to paragraph (a) of this section, for all multiengine airplanes, the following information must be furnished:</p> <p>(1) Procedures, speeds, and configuration(s) for making an approach and landing with one engine inoperative;</p> <p>(2) Procedures, speeds, and configuration(s) for making a balked landing with one engine inoperative and the conditions under which a balked landing can be performed safely, or a warning against attempting a balked landing;</p> <p>(3) The V_{SSE} determined in section 23.149; and</p> <p>(4) Procedures for restarting any engine in flight including the effects of altitude.</p> <p>(d) In addition to paragraphs (a) and either (b) or (c) of this section, as appropriate, for all normal, utility, and acrobatic category airplanes, the following information must be furnished:</p> <p>(1) Procedures, speeds, and configuration(s) for making a normal takeoff, in accordance with paragraphs 23.51 (a) and (b), and 23.53 (a) and (b), and the subsequent climb, in accordance with section 23.65 and paragraph 23.69(a).</p> <p>(2) Procedures for abandoning a takeoff due to engine failure or other cause.</p> <p>(e) In addition to paragraphs (a), (c), and (d) of this section, for all normal, utility, and acrobatic category multiengine airplanes, the information must include the following:</p> <p>(1) Procedures and speeds for continuing a</p>	<p>transição para condição de arremetida.</p> <p>(6) Para hidroaviões e aviões anfíbios, os procedimentos de uso na água, e a altura de onda demonstrada.</p> <p>(b) Além do parágrafo (a) desta seção, para todos os aviões monomotores, devem ser fornecidos os procedimentos, velocidades e configurações para planeio seguido a uma falha de motor, em conformidade com a seção 23.71, bem como o pouso forçado subsequentes.</p> <p>(c) Além do parágrafo (a) desta seção, para todos os aviões multimotores, devem ser fornecidas as seguintes informações:</p> <p>(1) Procedimentos, velocidades e configurações para executar aproximação e pouso com um motor inoperativo;</p> <p>(2) Procedimentos, velocidades e configurações para executar arremetida, com um motor inoperante, e as condições nas quais uma arremetida pode ser realizada com segurança, ou um aviso contra a tentativa de arremetida;</p> <p>(3) A V_{SSE} determinada na seção 23.149, e</p> <p>(4) Procedimentos para nova partida de qualquer motor em voo, incluindo os efeitos da altitude.</p> <p>(d) Além dos parágrafos (a) e, ou (b) ou (c) desta seção, conforme for apropriado, para todos aviões categoria normal, utilidade, e acrobática, devem ser fornecidas as seguintes informações:</p> <p>(1) Procedimentos, velocidades e configurações para executar decolagem normal, de acordo com os parágrafos 23.51(a) e (b), e 23.53(a) e (b), e subida subsequente, em conformidade com a seção 23.65 e parágrafo 23.69(a).</p> <p>(2) Procedimentos para abandonar uma decolagem devido a uma falha do motor ou outra causa.</p>
--	--

takeoff following engine failure and the conditions under which takeoff can safely be continued, or a warning against attempting to continue the takeoff.

(2) Procedures, speeds, and configurations for continuing a climb following engine failure, after takeoff, in accordance with section 23.67, or enroute, in accordance with paragraph 23.69(b).

(f) In addition to paragraphs (a) and (c) of this section, for normal, utility, and acrobatic category multiengine jets weighing over 6.000 pounds (2.722 kg), and commuter category airplanes, the information must include the following:

(1) Procedures, speeds, and configuration(s) for making a normal takeoff.

(2) Procedures and speeds for carrying out an accelerate-stop in accordance with section 23.55.

(3) Procedures and speeds for continuing a takeoff following engine failure in accordance with paragraph 23.59(a)(1) and for following the flight path determined under section 23.57 and paragraph 23.61(a).

(g) For multiengine airplanes, information identifying each operating condition in which the fuel system independence prescribed in section 23.953 is necessary for safety must be furnished, together with instructions for placing the fuel system in a configuration used to show compliance with that section.

(h) For each airplane showing compliance with paragraphs 23.1353(g)(2) or (g)(3), the operating procedures for disconnecting the battery from its charging source must be furnished.

(i) Information on the total quantity of usable fuel for each fuel tank, and the effect on the usable fuel quantity, as a result of a failure of

(e) Além dos parágrafos (a), (c), e (d) desta seção, para todos aviões multimotores categoria normal, utilidade e acrobática, a informação deve incluir o seguinte:

(1) Os procedimentos e velocidades para continuar a decolagem em seguida a uma falha de motor e as condições nas quais a decolagem pode ser continuada com segurança, ou um alerta contra a tentativa de continuar a decolagem.

(2) Procedimentos, velocidades e configurações para continuar a subida em seguida a uma falha do motor, de acordo com a seção 23.67, após a decolagem, ou de acordo com o parágrafo 23.69(b), quando em rota.

(f) Além dos parágrafos (a) e (c) desta seção, para aviões multimotores a jato das categorias normal, utilidade, e acrobática com peso acima de 6.000 libras (2.722 kg) e para aviões categoria transporte regional, as informações devem incluir o seguinte:

(1) Procedimentos, velocidades e configurações para executar decolagem normal.

(2) Os procedimentos e velocidades para execução de aceleração e parada em conformidade com a seção 23.55.

(3) Os procedimentos e velocidades para continuar a decolagem em seguida a uma falha do motor, em conformidade com o parágrafo 23.59(a)(1), e para seguir a trajetória de voo determinada de acordo com seção 23.57 e parágrafo 23.61(a).

(g) Para aviões multimotores, devem ser fornecidas informações que identifiquem cada condição de operação na qual a independência do sistema de combustível prevista na seção 23.953 seja necessária para a segurança, em conjunto com as instruções para a colocar o sistema de combustível em uma configuração utilizada para demonstrar a cumprimento com esta seção.

<p>any pump, must be furnished.</p> <p>(j) Procedures for the safe operation of the airplane's systems and equipment, both in normal use and in the event of malfunction, must be furnished.</p>	<p>(h) Para cada avião que demonstre cumprimento com os parágrafos 23.1353(g)(2) ou (g)(3), devem ser fornecidos os procedimentos operacionais para desconectar a bateria de sua fonte de carregamento.</p> <p>(i) Devem ser fornecidas informações sobre a quantidade total de combustível utilizável, para cada tanque de combustível, e o efeito na quantidade de combustível utilizável, em caso de mau funcionamento de qualquer bomba.</p> <p>(j) Devem ser fornecidos os procedimentos para a operação segura dos sistemas do avião e equipamentos, tanto em uso normal como em caso de mau funcionamento.</p>
--	---

[Doc. No. 27807, 61 FR 5194, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

<p>23.1587 Performance information.</p> <p>Unless otherwise prescribed, performance information must be provided over the altitude and temperature ranges required by paragraph 23.45(b).</p> <p>(a) For all airplanes, the following information must be furnished:</p> <p>(1) The stalling speeds V_{S0} and V_{S1} with the landing gear and wing flaps retracted, determined at maximum weight under section 23.49, and the effect on these stalling speeds of angles of bank up to 60 degrees;</p> <p>(2) The steady rate and gradient of climb with all engines operating, determined under paragraph 23.69(a);</p> <p>(3) The landing distance, determined under section 23.75 for each airport altitude and standard temperature, and the type of surface for which it is valid;</p> <p>(4) The effect on landing distances of operation on other than smooth hard surfaces, when dry, determined under paragraph 23.45(g); and</p>	<p>23.1587 Informações de desempenho.</p> <p>Salvo indicação em contrário, as informações de desempenho devem ser fornecidas no intervalo de altitudes e temperaturas exigidos pelo parágrafo 23.45(b).</p> <p>(a) Devem ser fornecidas, para todos os aviões, as seguintes informações:</p> <p>(1) As velocidades de estol V_{S0} e V_{S1}, com trem de pouso e flapes recolhidos, determinadas com o peso máximo, nos termos da seção 23.49, e o efeito de ângulos de inclinação de até 60 graus, sobre estas velocidades de estol;</p> <p>(2) A razão de subida estabilizada e o gradiente de subida estabilizado, com todos os motores operando, determinada no parágrafo 23.69(a);</p> <p>(3) A distância de pouso, determinada na seção 23.75, para cada altitude e temperatura padrão de aeródromo, e o tipo de superfície para a qual é válida;</p> <p>(4) O efeito, sobre as distâncias de pouso, da operação outras superfícies que não sejam lisas e duras, quando secas, determinado nos termos</p>
--	--

(5) The effect on landing distances of runway slope and 50 percent of the headwind component and 150 percent of the tailwind component.

(b) In addition to paragraph (a) of this section, for all normal, utility, and acrobatic category reciprocating engine-powered airplanes of 6.000 pounds (2.722 kg) or less maximum weight, the steady angle of climb/descent, determined under paragraph 23.77(a), must be furnished.

(c) In addition to paragraphs (a) and (b) of this section, if appropriate, for normal, utility, and acrobatic category airplanes, the following information must be furnished:

(1) The takeoff distance, determined under section 23.53 and the type of surface for which it is valid.

(2) The effect on takeoff distance of operation on other than smooth hard surfaces, when dry, determined under paragraph 23.45(g);

(3) The effect on takeoff distance of runway slope and 50 percent of the headwind component and 150 percent of the tailwind component;

(4) For multiengine reciprocating engine-powered airplanes of more than 6.000 pounds (2.722 kg) maximum weight and multiengine turbine powered airplanes, the one-engine-inoperative takeoff climb/descent gradient, determined under section 23.66;

(5) For multiengine airplanes, the enroute rate and gradient of climb/descent with one engine inoperative, determined under paragraph 23.69(b); and

(6) For single-engine airplanes, the glide performance determined under section 23.71.

(d) In addition to paragraph (a) of this section, for normal, utility, and acrobatic category multiengine jets weighing over 6.000 pounds

do parágrafo 23.45(g), e

(5) O efeito, sobre as distâncias de pouso, da inclinação da pista, bem como o efeito de 50 por cento do componente de vento frontal e o efeito de 150 por cento do componente de vento de cauda.

(b) Além do parágrafo (a) desta seção, deve ser fornecido, para todos os aviões categoria normal, utilidade, e acrobática, propulsados por motor convencional, com 6.000 libras (2.722 kg) ou menos de peso máximo, o ângulo de subida/descida estabilizado, determinado nos termos do parágrafo 23.77(a).

(c) Além dos parágrafos (a) e (b) desta seção, conforme o caso, para aviões categoria normal, utilidade, e acrobática, devem ser fornecidas as seguintes informações:

(1) A distância de decolagem, determinada nos termos da seção 23.53 e o tipo de superfície para a qual ela é válida.

(2) O efeito, sobre a distância de decolagem, da operação em outras superfícies que não sejam lisas e duras, quando secas, determinado nos termos do parágrafo 23.45(g);

(3) O efeito, sobre a distância de decolagem, da inclinação da pista, bem como o efeito de 50 por cento do componente de vento frontal, e o efeito de 150 por cento do componente de vento de cauda;

(4) Para aviões multimotores, propulsados por motores convencionais, com mais de 6.000 libras (2.722 kg) de peso máximo e aviões multimotores a turbina, o gradiente de subida/descida de decolagem, com um motor inoperante, determinado nos termos da seção 23.66;

(5) Para aviões multimotores, a razão e o gradiente, de subida/descida, em rota, com um motor inoperante, determinada nos termos do parágrafo 23.69(b), e

(2.722 kg), and commuter category airplanes, the following information must be furnished:

- (1) The accelerate-stop distance determined under section 23.55;
- (2) The takeoff distance determined under paragraph 23.59(a);
- (3) At the option of the applicant, the takeoff run determined under paragraph 23.59(b);
- (4) The effect on accelerate-stop distance, takeoff distance and, if determined, takeoff run, of operation on other than smooth hard surfaces, when dry, determined under paragraph 23.45(g);
- (5) The effect on accelerate-stop distance, takeoff distance, and if determined, takeoff run, of runway slope and 50 percent of the headwind component and 150 percent of the tailwind component;
- (6) The net takeoff flight path determined under paragraph 23.61(b);
- (7) The enroute gradient of climb/descent with one engine inoperative, determined under paragraph 23.69(b);
- (8) The effect, on the net takeoff flight path and on the enroute gradient of climb/descent with one engine inoperative, of 50 percent of the headwind component and 150 percent of the tailwind component;
- (9) Overweight landing performance information (determined by extrapolation and computed for the range of weights between the maximum landing and maximum takeoff weights) as follows:
 - (i) The maximum weight for each airport altitude and ambient temperature at which the airplane complies with the climb requirements of paragraph 23.63(d)(2); and
 - (ii) The landing distance determined under

(6) Para aviões monomotor, o desempenho de planeio, determinado nos termos da seção 23.71.

(d) Em adição ao parágrafo (a) desta seção, para aviações multimotores a jato das categorias normal, utilidade, e acrobática com peso acima de 6.000 libras (2.722 kg) e para aviões dos aviões categoria transporte regional, devem ser fornecidas as seguintes informações:

- (1) A distância de aceleração e parada, determinada nos termos da seção 23.55;
- (2) A distância de decolagem, determinada nos termos do parágrafo 23.59(a);
- (3) Como opção do requerente, a corrida de decolagem, determinada nos termos do parágrafo 23.59(b);
- (4) O efeito sobre a distância de aceleração e parada, distância de decolagem e, se determinada, corrida de decolagem, da operação em outras superfícies que não sejam lisas e duras, quando seco, determinado nos termos do parágrafo 23.45(g);
- (5) O efeito sobre a distância de aceleração e parada, distância de decolagem, e se determinada, corrida de decolagem, da inclinação da pista, bem como o efeito de 50 por cento do componente de vento frontal e o efeito de 150 por cento do componente de vento de cauda;
- (6) A trajetória de voo líquida na decolagem, determinada nos termos do parágrafo 23.61(b);
- (7) O gradiente de subida/descida, em rota, com um motor inoperante, determinado nos termos do parágrafo 23.69(b);
- (8) O efeito, na trajetória de voo líquida na decolagem e no gradiente de subida/descida, em rota, com um motor inoperante, de 50 por cento do componente de vento frontal bem como o efeito de 150 por cento do componente

<p>section 23.75 for each airport altitude and standard temperature.</p> <p>(10) The relationship between IAS and CAS determined in accordance with paragraphs 23.1323 (b) and (c).</p> <p>(11) The altimeter system calibration required by paragraph 23.1325(e).</p>	<p>de vento de cauda;</p> <p>(9) informações sobre o desempenho de pouso com excesso de peso (determinado por extrapolação e calculado para a faixa de pesos entre o peso máximo de pouso e peso máximo de decolagem) da seguinte forma:</p> <p>(i) O peso máximo para cada altitude e temperatura ambiente de aeródromo na qual o avião cumpra com os requisitos de subida do parágrafo 23.63(d)(2), e</p> <p>(ii) A distância de pouso, determinada nos termos da seção 23.75, para cada altitude de aeródromo e temperatura padrão.</p> <p>(10) A relação entre as IAS e CAS determinado de acordo com os parágrafos 23.1323(b) e (c).</p> <p>(11) O sistema de calibração do altímetro exigido pelo parágrafo 23.1325(e).</p>
--	---

[Doc. No. 27807, 61 FR 5194, Feb. 9, 1996, as amended by Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

§ 23.1589 Loading information.

The following loading information must be furnished:

- (a) The weight and location of each item of equipment that can be easily removed, relocated, or replaced and that is installed when the airplane was weighed under the requirement of §23.25.
- (b) Appropriate loading instructions for each possible loading condition between the maximum and minimum weights established under §23.25, to facilitate the center of gravity remaining within the limits established under §23.23.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-45, 58 FR 42167, Aug. 6, 1993; Amdt. 23-50, 61 FR 5195, Feb. 9, 1996]

Appendix A to Part 23—Simplified Design Load Criteria

A23.1 General.

(a) The design load criteria in this appendix are an approved equivalent of those in §§23.321 through 23.459 of this subchapter for an airplane having a maximum weight of 6,000 pounds or less and the following configuration:

- (1) A single engine excluding turbine powerplants;

- (2) A main wing located closer to the airplane's center of gravity than to the aft, fuselage-mounted, empennage;
- (3) A main wing that contains a quarter-chord sweep angle of not more than 15 degrees fore or aft;
- (4) A main wing that is equipped with trailing-edge controls (ailerons or flaps, or both);
- (5) A main wing aspect ratio not greater than 7;
- (6) A horizontal tail aspect ratio not greater than 4;
- (7) A horizontal tail volume coefficient not less than 0.34;
- (8) A vertical tail aspect ratio not greater than 2;
- (9) A vertical tail platform area not greater than 10 percent of the wing platform area; and
- (10) Symmetrical airfoils must be used in both the horizontal and vertical tail designs.

(b) Appendix A criteria may not be used on any airplane configuration that contains any of the following design features:

- (1) Canard, tandem-wing, close-coupled, or tailless arrangements of the lifting surfaces;
- (2) Biplane or multiplane wing arrangements;
- (3) T-tail, V-tail, or cruciform-tail (+) arrangements;
- (4) Highly-swept wing platform (more than 15-degrees of sweep at the quarter-chord), delta planforms, or slatted lifting surfaces; or
- (5) Winglets or other wing tip devices, or outboard fins.

A23.3 Special symbols.

n 1=Airplane Positive Maneuvering Limit Load Factor.

n 2=Airplane Negative Maneuvering Limit Load Factor.

n 3=Airplane Positive Gust Limit Load Factor at V C.

n 4=Airplane Negative Gust Limit Load Factor at V C.

n flap=Airplane Positive Limit Load Factor With Flaps Fully Extended at V F.

$$* V_{F \min} = \text{Minimum Design Flap Speed} = 11.0\sqrt{n_1 W/S} \quad [\text{ktg}]$$

$$* V_{A \min} = \text{Minimum Design Maneuvering Speed} = 15.0\sqrt{n_1 W/S} \quad [\text{ktg}]$$

$$* V_{C \min} = \text{Minimum Design Cruising Speed} = 17.0\sqrt{n_1 W/S} \quad [\text{ktg}]$$

$$* V_{D \min} = \text{Minimum Design Dive Speed} = 24.0\sqrt{n_1 W/S} \quad [\text{ktg}]$$

A23.5 Certification in more than one category.

The criteria in this appendix may be used for certification in the normal, utility, and acrobatic categories, or in any combination of these categories. If certification in more than one category is desired, the design category weights must be selected to make the term $n_1 W$ constant for all categories or greater for one desired category than for others. The wings and control surfaces (including wing flaps and tabs) need only be investigated for the maximum value of $n_1 W$, or for the category corresponding to the maximum design weight, where $n_1 W$ is constant. If the acrobatic category is selected, a special unsymmetrical flight load investigation in accordance with paragraphs A23.9(c)(2) and A23.11(c)(2) of this appendix must be completed. The wing, wing carrythrough, and the horizontal tail structures must be checked for this condition. The basic fuselage structure need only be investigated for the highest load factor design category selected. The local supporting structure for dead weight items need only be designed for the highest load factor imposed when the particular items are installed in the airplane. The engine mount, however, must be designed for a higher side load factor, if certification in the acrobatic category is desired, than that required for certification in the normal and utility categories. When designing for landing loads, the landing gear and the airplane as a whole need only be investigated for the category corresponding to the maximum design weight. These simplifications apply to single-engine aircraft of conventional types for which experience is available, and the Administrator may require additional investigations for aircraft with unusual design features.

A23.7 Flight loads.

- (a) Each flight load may be considered independent of altitude and, except for the local supporting structure for dead weight items, only the maximum design weight conditions must be investigated.
- (b) Table 1 and figures 3 and 4 of this appendix must be used to determine values of n_1 , n_2 , n_3 , and n_4 , corresponding to the maximum design weights in the desired categories.
- (c) Figures 1 and 2 of this appendix must be used to determine values of n_3 and n_4 corresponding to the minimum flying weights in the desired categories, and, if these load factors are greater than the load factors at the design weight, the supporting structure for dead weight items must be substantiated for the resulting higher load factors.
- (d) Each specified wing and tail loading is independent of the center of gravity range. The applicant, however, must select a c.g. range, and the basic fuselage structure must be investigated for the most adverse dead weight loading conditions for the c.g. range selected.
- (e) The following loads and loading conditions are the minimums for which strength must be provided in the structure:
- (1) Airplane equilibrium. The aerodynamic wing loads may be considered to act normal to the

relative wind, and to have a magnitude of 1.05 times the airplane normal loads (as determined from paragraphs A23.9 (b) and (c) of this appendix) for the positive flight conditions and a magnitude equal to the airplane normal loads for the negative conditions. Each chordwise and normal component of this wing load must be considered.

(2) Minimum design airspeeds. The minimum design airspeeds may be chosen by the applicant except that they may not be less than the minimum speeds found by using figure 3 of this appendix. In addition, V_{Cmin} need not exceed values of $0.9 V_H$ actually obtained at sea level for the lowest design weight category for which certification is desired. In computing these minimum design airspeeds, n_{1min} may not be less than 3.8.

(3) Flight load factor. The limit flight load factors specified in Table 1 of this appendix represent the ratio of the aerodynamic force component (acting normal to the assumed longitudinal axis of the airplane) to the weight of the airplane. A positive flight load factor is an aerodynamic force acting upward, with respect to the airplane.

A23.9 Flight conditions.

(a) General. Each design condition in paragraphs (b) and (c) of this section must be used to assure sufficient strength for each condition of speed and load factor on or within the boundary of a $V-n$ diagram for the airplane similar to the diagram in figure 4 of this appendix. This diagram must also be used to determine the airplane structural operating limitations as specified in §§23.1501(c) through 23.1513 and §23.1519.

(b) Symmetrical flight conditions. The airplane must be designed for symmetrical flight conditions as follows:

(1) The airplane must be designed for at least the four basic flight conditions, “A”, “D”, “E”, and “G” as noted on the flight envelope of figure 4 of this appendix. In addition, the following requirements apply:

(i) The design limit flight load factors corresponding to conditions “D” and “E” of figure 4 must be at least as great as those specified in Table 1 and figure 4 of this appendix, and the design speed for these conditions must be at least equal to the value of V_D found from figure 3 of this appendix.

(ii) For conditions “A” and “G” of figure 4, the load factors must correspond to those specified in Table 1 of this appendix, and the design speeds must be computed using these load factors with the maximum static lift coefficient C_{NA} determined by the applicant. However, in the absence of more precise computations, these latter conditions may be based on a value of $C_{NA} = \pm 1.35$ and the design speed for condition “A” may be less than V_{Amin} .

(iii) Conditions “C” and “F” of figure 4 need only be investigated when $n_{3W/S}$ or $n_{4W/S}$ are greater than $n_{1W/S}$ or $n_{2W/S}$ of this appendix, respectively.

(2) If flaps or other high lift devices intended for use at the relatively low airspeed of approach, landing, and takeoff, are installed, the airplane must be designed for the two flight conditions corresponding to the values of limit flap-down factors specified in Table 1 of this appendix with the flaps fully extended at not less than the design flap speed V_{Fmin} from figure 3 of this appendix.

(c) Unsymmetrical flight conditions. Each affected structure must be designed for unsymmetrical loadings as follows:

(1) The aft fuselage-to-wing attachment must be designed for the critical vertical surface load determined in accordance with paragraph SA23.11(c)(1) and (2) of this appendix.

(2) The wing and wing carry-through structures must be designed for 100 percent of condition “A” loading on one side of the plane of symmetry and 70 percent on the opposite side for certification in the normal and utility categories, or 60 percent on the opposite side for certification in the acrobatic category.

(3) The wing and wing carry-through structures must be designed for the loads resulting from a combination of 75 percent of the positive maneuvering wing loading on both sides of the plane of symmetry and the maximum wing torsion resulting from aileron displacement. The effect of aileron displacement on wing torsion at V_C or V_A using the basic airfoil moment coefficient modified over the aileron portion of the span, must be computed as follows:

(i) $C_m = C_m + 0.01\delta_u$ (up aileron side) wing basic airfoil.

(ii) $C_m = C_m - 0.01\delta_d$ (down aileron side) wing basic airfoil, where δ_u is the up aileron deflection and δ_d is the down aileron deflection.

(4) Δ critical, which is the sum of $\delta_u + \delta_d$ must be computed as follows:

(i) Compute $\Delta\alpha$ and $\Delta\beta$ from the formulas:

$$\Delta\alpha = \frac{V_A}{V_C} \times \Delta_p \quad \text{and}$$

$$\Delta\beta = 0.5 \frac{V_A}{V_D} \times \Delta_p$$

Where Δ_p = the maximum total deflection (sum of both aileron deflections) at V_A with V_A , V_C , and V_D described in subparagraph (2) of §23.7(e) of this appendix.

(ii) Compute K from the formula:

$$K = \frac{(C_m - 0.01\delta_b)V_D^2}{(C_m - 0.01\delta_a)V_C^2}$$

where δ_a is the down aileron deflection corresponding to $\Delta\alpha$ and δ_b is the down aileron deflection corresponding to $\Delta\beta$ as computed in step (i).

(iii) If K is less than 1.0, $\Delta\alpha$ is Δ critical and must be used to determine δ_u and δ_d . In this case, V_C is the critical speed which must be used in computing the wing torsion loads over the aileron span.

(iv) If K is equal to or greater than 1.0, $\Delta\beta$ is Δ critical and must be used to determine δ_u and δ_d . In this case, V_D is the critical speed which must be used in computing the wing torsion loads over the

aileron span.

(d) Supplementary conditions; rear lift truss; engine torque; side load on engine mount. Each of the following supplementary conditions must be investigated:

(1) In designing the rear lift truss, the special condition specified in §23.369 may be investigated instead of condition “G” of figure 4 of this appendix. If this is done, and if certification in more than one category is desired, the value of W/S used in the formula appearing in §23.369 must be that for the category corresponding to the maximum gross weight.

(2) Each engine mount and its supporting structures must be designed for the maximum limit torque corresponding to METO power and propeller speed acting simultaneously with the limit loads resulting from the maximum positive maneuvering flight load factor n_1 . The limit torque must be obtained by multiplying the mean torque by a factor of 1.33 for engines with five or more cylinders. For 4, 3, and 2 cylinder engines, the factor must be 2, 3, and 4, respectively.

(3) Each engine mount and its supporting structure must be designed for the loads resulting from a lateral limit load factor of not less than 1.47 for the normal and utility categories, or 2.0 for the acrobatic category.

A23.11 Control surface loads.

(a) General. Each control surface load must be determined using the criteria of paragraph (b) of this section and must lie within the simplified loadings of paragraph (c) of this section.

(b) Limit pilot forces. In each control surface loading condition described in paragraphs (c) through (e) of this section, the airloads on the movable surfaces and the corresponding deflections need not exceed those which could be obtained in flight by employing the maximum limit pilot forces specified in the table in §23.397(b). If the surface loads are limited by these maximum limit pilot forces, the tabs must either be considered to be deflected to their maximum travel in the direction which would assist the pilot or the deflection must correspond to the maximum degree of “out of trim” expected at the speed for the condition under consideration. The tab load, however, need not exceed the value specified in Table 2 of this appendix.

(c) Surface loading conditions. Each surface loading condition must be investigated as follows:

(1) Simplified limit surface loadings for the horizontal tail, vertical tail, aileron, wing flaps, and trim tabs are specified in figures 5 and 6 of this appendix.

(i) The distribution of load along the span of the surface, irrespective of the chordwise load distribution, must be assumed proportional to the total chord, except on horn balance surfaces.


(ii) The load on the stabilizer and elevator, and the load on fin and rudder, must be distributed chordwise as shown in figure 7 of this appendix.

(iii) In order to ensure adequate torsional strength and to account for maneuvers and gusts, the most severe loads must be considered in association with every center of pressure position between the leading edge and the half chord of the mean chord of the surface (stabilizer and elevator, or fin and rudder).

(iv) To ensure adequate strength under high leading edge loads, the most severe stabilizer and fin loads must be further considered as being increased by 50 percent over the leading 10 percent of the chord with the loads aft of this appropriately decreased to retain the same total load.

(v) The most severe elevator and rudder loads should be further considered as being distributed parabolically from three times the mean loading of the surface (stabilizer and elevator, or fin and rudder) at the leading edge of the elevator and rudder, respectively, to zero at the trailing edge according to the equation:

$$P(x) = 3(\bar{w}) \frac{(c - x)^2}{c_f^2}$$

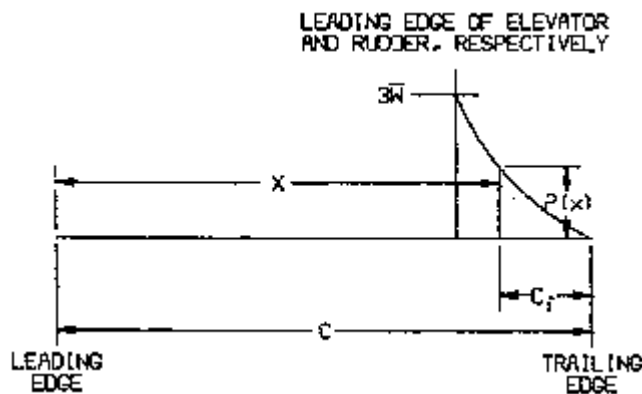

Where—

$P(x)$ =local pressure at the chordwise stations x ,

c =chord length of the tail surface,

c_f =chord length of the elevator and rudder respectively, and

w =average surface loading as specified in Figure A5.

(vi) The chordwise loading distribution for ailerons, wing flaps, and trim tabs are specified in Table 2 of this appendix.

(2) If certification in the acrobatic category is desired, the horizontal tail must be investigated for an unsymmetrical load of 100 percent w on one side of the airplane centerline and 50 percent on the other side of the airplane centerline.

(d) Outboard fins. Outboard fins must meet the requirements of §23.445.

(e) Special devices. Special devices must meet the requirements of §23.459.

A23.13 Control system loads.

(a) Primary flight controls and systems. Each primary flight control and system must be designed as follows:

(1) The flight control system and its supporting structure must be designed for loads corresponding to 125 percent of the computed hinge moments of the movable control surface in the conditions prescribed in A23.11 of this appendix. In addition—

(i) The system limit loads need not exceed those that could be produced by the pilot and automatic devices operating the controls; and

(ii) The design must provide a rugged system for service use, including jamming, ground gusts, taxiing downwind, control inertia, and friction.

(2) Acceptable maximum and minimum limit pilot forces for elevator, aileron, and rudder controls are shown in the table in §23.397(b). These pilots loads must be assumed to act at the appropriate control grips or pads as they would under flight conditions, and to be reacted at the attachments of the control system to the control surface horn.

(b) Dual controls. If there are dual controls, the systems must be designed for pilots operating in opposition, using individual pilot loads equal to 75 percent of those obtained in accordance with paragraph (a) of this section, except that individual pilot loads may not be less than the minimum limit pilot forces shown in the table in §23.397(b).

(c) Ground gust conditions. Ground gust conditions must meet the requirements of §23.415.

(d) Secondary controls and systems. Secondary controls and systems must meet the requirements of §23.405.

Table 1—Limit Flight Load Factors

[Limit flight load factors]



Flight load factors	Normal category	Utility category	Acrobatic category
Flaps up:			
n_1	3.8	4.4	6.0
n_2	$-0.5 n_1$		
n_3	⁽¹⁾		
n_4	⁽²⁾		
Flaps down:			
n_{flap}	$0.5 n_1$		
n_{flap}	³ Zero		

¹Find n_3 from Fig. 1

²Find n_4 from Fig. 2

³Vertical wing load may be assumed equal to zero and only the flap part of the wing need be checked for this condition.

Table 2 - Average limit control surface loading

AVERAGE LIMIT CONTROL SURFACE LOADING			
SURFACE	DIRECTION OF LOADING	MAGNITUDE OF LOADING	CHORDWISE DISTRIBUTION
Horizontal Tail I	a) Up and Down	Figure A5 Curve (2)	See Figure A7
	b) Unsymmetrical Loading (Up and Down)	100% \bar{w} on one side of airplane ζ 65% \bar{w} on other side of airplane ζ for normal and utility categories. For acrobatic category see A23.11(c)	
Vertical Tail II	Right and Left	Figure A5 Curve (1)	Same as above
Aileron III	a) Up and Down	Figure A6 Curve (5)	(C) 
Wing Flap IV	a) Up	Figure A6 Curve (4)	(D) 
	b) Down	.25 x Up Load (a)	
Trim Tab V	a) Up and Down	Figure A6 Curve (3)	Same as (D) above

NOTE: The surface loading I, II, III, and V above are based on speeds V_A min. and V_C min.
The loading of IV is based on V_F min.
If values of speed greater than these minimums are selected for design, the appropriate surface loadings must be multiplied by the ratio $\left(\frac{V_{selected}}{V_{minimum}}\right)^2$.
For conditions I, II, III, and V the multiplying factor used must be the higher of $\left(\frac{V_A\ sel.}{V_A\ min.}\right)^2$ or $\left(\frac{V_C\ sel.}{V_C\ min.}\right)^2$.

FIGURE A1—CHART FOR FINDING n_3 FACTOR AT SPEED V_c

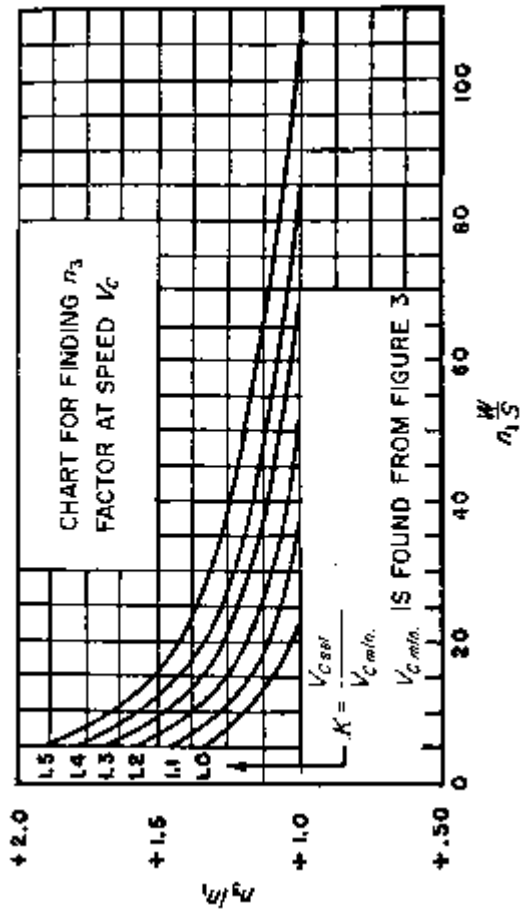


FIGURE A2 - CHART FOR FINDING n_A FACTOR AT SPEED V_C

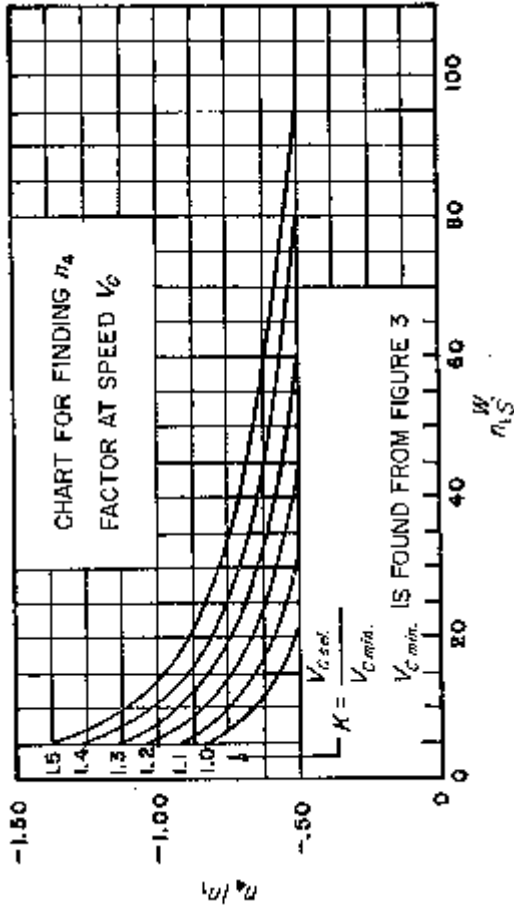



FIGURE A3 - LIMITATIONS OF HINDS DESIGN SPEED EQUATIONS

$V_{max} = 24.0 \sqrt{\frac{W}{S}}$ but need not exceed $3.0 V_C$

$V_{max} = 15.0 \sqrt{\frac{W}{S}}$ but need not exceed $3.0 V_C$

at design $V_{max} = 11.0 \sqrt{\frac{W}{S}}$

FIGURE A-4—FLIGHT ENVELOPE

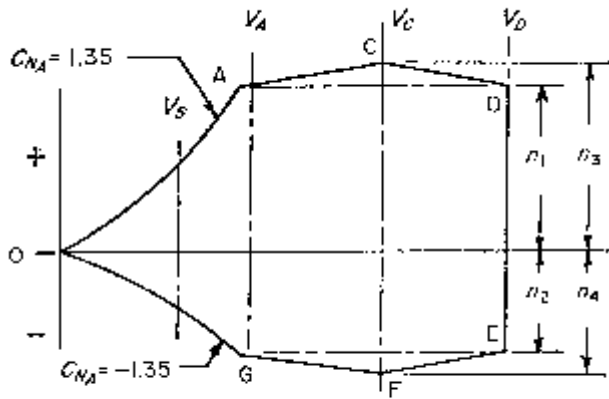

1. Conditions "D" or "E" need only be investigated when $n_1 \frac{W}{S}$ or $n_3 \frac{W}{S}$ is greater than $n_1 \frac{W}{S}$ or $n_3 \frac{W}{S}$, respectively.
2. Condition "D" need not be investigated when the regulatory condition specified in § 25.332 is investigated.

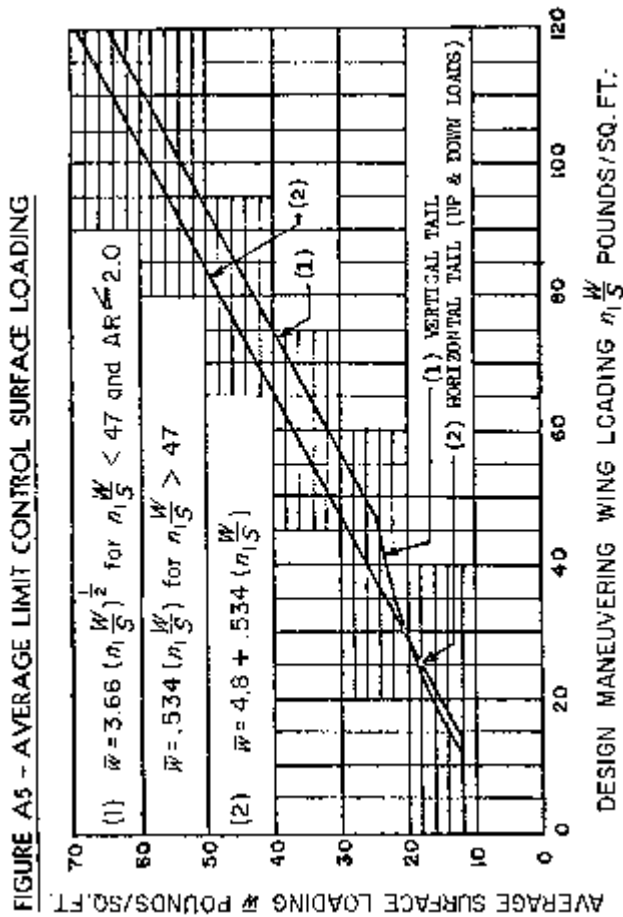


FIGURE A6 - AVERAGE LIMIT CONTROL SURFACE LOADING


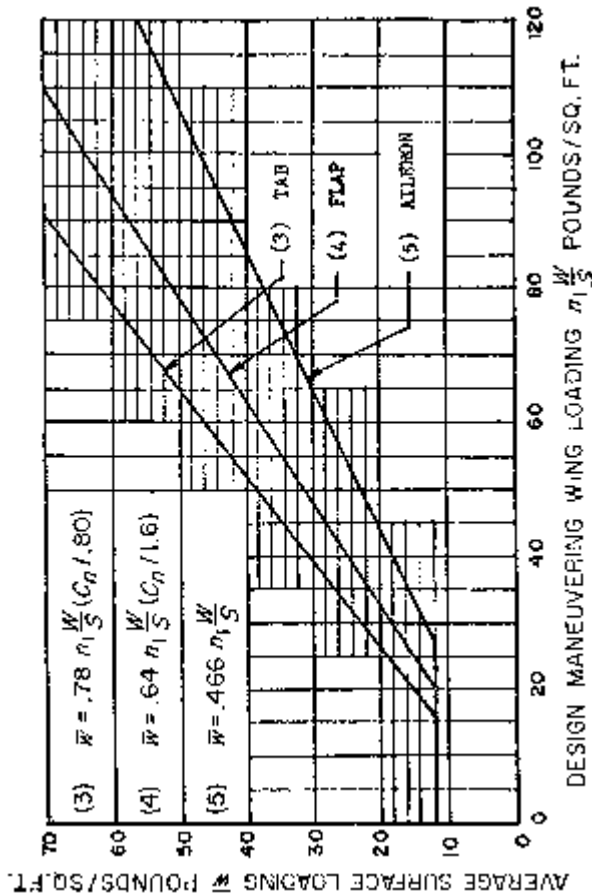


Figure A7—Chordwise Load Distribution for Stabilizer and Elevator or Fin and

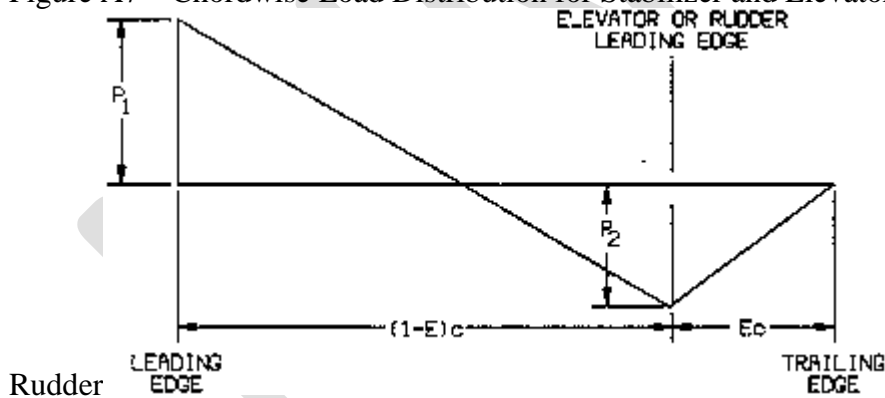

$$P_1 = 2(\bar{w}) \frac{(2 - E - 3d)}{(1 - E)}$$

$$P_2 = 2(\bar{w}) (3d + E - 1)$$

where:

\bar{w} =average surface loading (as specified in figure A.5)

E =ratio of elevator (or rudder) chord to total stabilizer and elevator (or fin and rudder) chord.

d' =ratio of distance of center of pressure of a unit spanwise length of combined stabilizer and elevator (or fin and rudder) measured from stabilizer (or fin) leading edge to the local chord. Sign convention is positive when center of pressure is behind leading edge.

c =local chord.

Note: Positive values of w , P_1 and P_2 are all measured in the same direction.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–7, 34 FR 13097, Aug. 13, 1969; 34 FR 14727, Sept. 24, 1969; Amdt. 23–16, 40 FR 2577, Jan. 14, 1975; Amdt. 23–28, 47 FR 13315, Mar. 29, 1982; Amdt. 23–48, 61 FR 5149, Feb. 9, 1996]

Appendix B to Part 23 [Reserved]

Appendix C to Part 23—Basic Landing Conditions

[C23.1 Basic landing conditions]

Condition	Tail wheel type		Nose wheel type		
	Level landing	Tail-down landing	Level landing with inclined reactions	Level landing with nose wheel just clear of ground	Tail-down landing
Reference section	23.479(a)(1)	23.481(a)(1)	23.479(a)(2)(i)	23.479(a)(2)(ii)	23.481(a)(2) and (b).
Vertical component at c. g	nW	nW	nW	nW	nW .
Fore and aft component at c. g	KnW	0	KnW	KnW	0.
Lateral component in either direction at c. g	0	0	0	0	0.
Shock absorber extension (hydraulic shock absorber)	Note (2)	Note (2)	Note (2)	Note (2)	Note (2).
Shock absorber deflection (rubber or spring shock absorber), percent	100	100	100	100	100.
Tire deflection	Static	Static	Static	Static	Static.
Main wheel loads (both wheels)	$(n-L) W$	$(n-L) W b/d$	$(n-L) W a'/d'$	$(n-L) W$	$(n-L) W$.

(Vr)					
Main wheel loads (both wheels) (Dr)	KnW	0	KnW a'/d'	KnW	0.
Tail (nose) wheel loads (Vf)	0	(n-L) W a/d	(n-L) W b'/d'	0	0.
Tail (nose) wheel loads (Df)	0	0	KnW b'/d'	0	0.
Notes	(1), (3), and (4)	(4)	(1)	(1), (3), and (4)	(3) and (4).


Note (1). K may be determined as follows: $K = 0.25$ for $W = 3,000$ pounds or less; $K = 0.33$ for $W = 6,000$ pounds or greater, with linear variation of K between these weights.

Note (2). For the purpose of design, the maximum load factor is assumed to occur throughout the shock absorber stroke from 25 percent deflection to 100 percent deflection unless otherwise shown and the load factor must be used with whatever shock absorber extension is most critical for each element of the landing gear.

Note (3). Unbalanced moments must be balanced by a rational or conservative method.

Note (4). L is defined in §23.735(b).

Note (5). n is the limit inertia load factor, at the c.g. of the airplane, selected under §23.473 (d), (f), and (g).

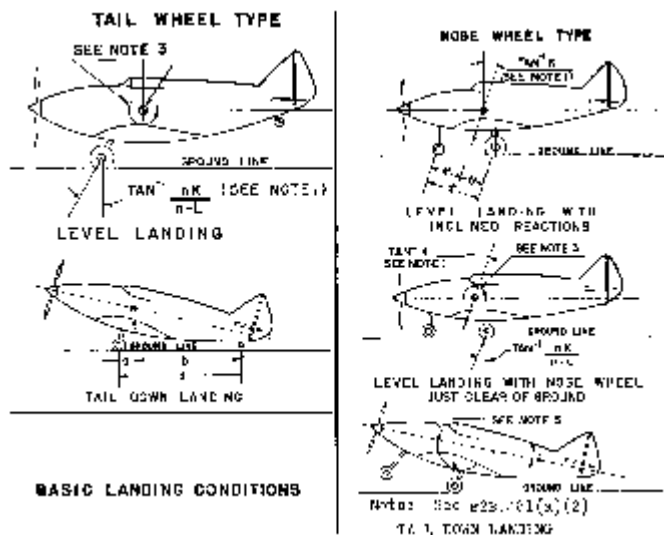

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23-7, 34 FR 13099, Aug. 13, 1969]

Appendix D to Part 23—Wheel Spin-Up and Spring-Back Loads

D23.1 Wheel spin-up loads.

(a) The following method for determining wheel spin-up loads for landing conditions is based on

NACA T.N. 863. However, the drag component used for design may not be less than the drag load prescribed in §23.479(b).

$$F_{Hmax} = \frac{1}{r} \sqrt{2I_w (V_H - V_c)^2 n F_{Vmax}} / t_s$$

where—

F_{Hmax} = maximum rearward horizontal force acting on the wheel (in pounds);

r = effective rolling radius of wheel under impact based on recommended operating tire pressure (which may be assumed to be equal to the rolling radius under a static load of $n_j W_e$) in feet;

I_w = rotational mass moment of inertia of rolling assembly (in slug feet);

V_H = linear velocity of airplane parallel to ground at instant of contact (assumed to be $1.2 V_{S0}$, in feet per second);

V_c = peripheral speed of tire, if prerotation is used (in feet per second) (there must be a positive means of pre-rotation before pre-rotation may be considered);

n = equals effective coefficient of friction (0.80 may be used);

F_{Vmax} = maximum vertical force on wheel (pounds) = $n_j W_e$, where W_e and n_j are defined in §23.725;

t_s = time interval between ground contact and attainment of maximum vertical force on wheel (seconds). (However, if the value of F_{Vmax} from the above equation exceeds $0.8 F_{Vmax}$, the latter value must be used for F_{Hmax} .)

(b) The equation assumes a linear variation of load factor with time until the peak load is reached and under this assumption, the equation determines the drag force at the time that the wheel peripheral velocity at radius r equals the airplane velocity. Most shock absorbers do not exactly follow a linear variation of load factor with time. Therefore, rational or conservative allowances must be made to compensate for these variations. On most landing gears, the time for wheel spin-up will be less than the time required to develop maximum vertical load factor for the specified rate of descent and forward velocity. For exceptionally large wheels, a wheel peripheral velocity equal to the ground speed may not have been attained at the time of maximum vertical gear load. However, as stated above, the drag spin-up load need not exceed 0.8 of the maximum vertical loads.

(c) Dynamic spring-back of the landing gear and adjacent structure at the instant just after the wheels come up to speed may result in dynamic forward acting loads of considerable magnitude. This effect must be determined, in the level landing condition, by assuming that the wheel spin-up loads calculated by the methods of this appendix are reversed. Dynamic spring-back is likely to become critical for landing gear units having wheels of large mass or high landing speeds.

[Doc. No. 4080, 29 FR 17955, Dec. 18, 1964, as amended by Amdt. 23–45, 58 FR 42167, Aug. 6, 1993]

Appendix E to Part 23 [Reserved]

Appendix F to RBAC 23 — Test Procedure

Part I — Acceptable Test Procedure for Self-Extinguishing Materials for Showing Compliance With sections 23.853, 23.855, and 23.1359.

(a) Conditioning. Specimens must be conditioned to 70 degrees F, plus or minus 5 degrees ($21^{\circ}\text{C} \pm 3^{\circ}\text{C}$), and at 50 percent plus or minus 5 percent relative humidity until moisture equilibrium is reached or for 24 hours. Only one specimen at a time may be removed from the conditioning environment immediately before subjecting it to the flame.

(b) Specimen configuration. Except as provided for materials used in electrical wire and cable insulation and in small parts, materials must be tested either as a section cut from a fabricated part as installed in the airplane or as a specimen simulating a cut section, such as: a specimen cut from a flat sheet of the material or a model of the fabricated part. The specimen may be cut from any location in a fabricated part; however, fabricated units, such as sandwich panels, may not be separated for a test. The specimen thickness must be no thicker than the minimum thickness to be qualified for use in the airplane, except that:

(1) Thick foam parts, such as seat cushions, must be tested in 1/2 inch (12 mm) thickness;

(2) when showing compliance with paragraph 23.853(d)(3)(v) for materials used in small parts that must be tested, the materials must be tested in no more than 1/8 inch (3 mm) thickness;

(3) when showing compliance with paragraph 23.1359(c) for materials used in electrical wire and cable insulation, the wire and cable specimens must be the same size as used in the airplane. In the case of fabrics, both the warp and fill direction of the weave must be tested to determine the most critical flammability conditions. When performing the tests

Apêndice F do RBAC 23 — Procedimento de Ensaio

Parte I — Procedimento de ensaio aceitável para materiais auto extingüíveis para demonstrar cumprimento com as seções 23.853, 23.855 e 23.1359.

(a) Condicionamento. Os corpos de prova devem ser condicionados a $70^{\circ}\text{F} \pm 5^{\circ}$ ($21^{\circ}\text{C} \pm 3^{\circ}\text{C}$), e em $50\% \pm 5\%$ de umidade relativa até que o equilíbrio de umidade seja alcançado ou durante 24 horas. Somente uma amostra de cada vez pode ser retirada do ambiente de condicionamento imediatamente antes de ser submetida à chama.

(b) Configuração do corpo de prova. Exceto conforme previsto para materiais usados em fio elétrico e isolamento de cabo e em pequenas partes, os materiais devem ser ensaiados como uma seção cortada de uma parte fabricada como instalado no avião ou como um corpo de prova que simula uma seção cortada, tal como: um corpo de prova cortado de uma folha plana do material ou um modelo da parte fabricada. O corpo de prova pode ser cortado de qualquer posição da parte fabricada; contudo, as unidades fabricadas como painéis sanduíche, não podem ser separadas para um ensaio. A espessura do corpo de prova não pode ser mais grossa do que a espessura mínima a ser qualificada para o uso no avião, exceto que:

(1) As partes de espuma grossa, como almofadas de assento, devem ser ensaiadas com espessura de 1/2 polegada (12 mm);

(2) quando demonstrando cumprimento com o requisito 23.853(d)(3)(v) para materiais usados em partes pequenas que devem ser ensaiadas, os materiais devem ser ensaiados com espessuras de não mais do que 1/8 de polegada (3 mm);

(3) quando demonstrando cumprimento com o parágrafo 23.1359 (c) para materiais usados em fio elétrico e isolamento de cabo, os corpos de prova do fio e cabo devem ser do mesmo

prescribed in paragraphs (d) and (e) of this appendix, the specimen must be mounted in a metal frame so that:

(1) in the vertical tests of paragraph (d) of this appendix, the two long edges and the upper edge are held securely;

(2) in the horizontal test of paragraph (e) of this appendix, the two long edges and the edge away from the flame are held securely;

(3) the exposed area of the specimen is at least 2 inches (51 mm) wide and 12 inches (305 mm) long, unless the actual size used in the airplane is smaller; and

(4) the edge to which the burner flame is applied must not consist of the finished or protected edge of the specimen but must be representative of the actual cross section of the material or part installed in the airplane. When performing the test prescribed in paragraph (f) of this appendix, the specimen must be mounted in metal frame so that all four edges are held securely and the exposed area of the specimen is at least 8 inches (203 mm) by 8 inches (203 mm).

(c) Apparatus. Except as provided in paragraph (g) of this appendix, tests must be conducted in a draft-free cabinet in accordance with Federal Test Method Standard 191 Method 5903 (revised Method 5902) which is available from the General Services Administration, Business Service Center, Region 3, Seventh and D Streets SW., Washington, D.C. 20407, USA, or with some other approved equivalent method. Specimens which are too large for the cabinet must be tested in similar draft-free conditions.

(d) Vertical test. A minimum of three specimens must be tested and the results averaged. For fabrics, the direction of weave corresponding to the most critical flammability conditions must be parallel to the longest dimension. Each specimen must be supported vertically. The specimen must be exposed to a Bunsen or Tirrill burner with a nominal 3/8-

tamanho dos que são usados no avião. Em caso de tecidos, ambas as direções de urdidura e de preenchimento da trama devem ser ensaiadas para determinar as condições de inflamabilidade mais críticas. Executando os ensaios descritos nos parágrafos (d) e (e) deste apêndice, o corpo de prova deve ser montado em uma armação metálica de forma que:

(1) nos ensaios verticais do parágrafo (d) deste apêndice, as duas bordas laterais e a borda superior estejam seguramente presas;

(2) no ensaio horizontal do parágrafo (e) deste apêndice, as duas bordas laterais e a borda distante da chama estejam seguramente presas;

(3) a área exposta do corpo de prova seja de pelo menos 2 polegadas (51 mm) de largura e 12 polegadas (305 mm) de comprimento, a menos que o tamanho real usado no avião seja menor; e

(4) a borda na qual a chama do queimador é aplicada não pode compor-se da borda terminada ou protegida do corpo de prova, mas deve ser representativa da seção real do material ou peça instalada no avião. Quando executando o ensaio prescrito no parágrafo (f) deste apêndice, o corpo de prova deve ser montado na armação metálica de tal forma que as quatro bordas sejam seguramente presas e a área exposta do corpo de prova seja de pelo menos 8 polegadas (203 mm) por 8 polegadas (203 mm).

(c) Aparelho. Exceto conforme estabelecido no parágrafo (g) deste apêndice, os ensaios devem ser conduzidos em um gabinete livre de correntes de ar conforme o Federal Test Method Standard 191 Method 5903 (Método revisado 5902) que está disponível na General Services Administration, Business Service Center, Region 3, Seventh and D Streets SW., Washington, D.C. 20407, EUA, ou com algum outro método equivalente aprovado. Os corpos de prova que são muito grandes para o gabinete devem ser ensaiados em condições

inch (9 mm) I.D. tube adjusted to give a flame of 1 1/2 inches (38 mm) in height. The minimum flame temperature measured by a calibrated thermocouple pyrometer in the center of the flame must be 1.550 °F (843 °C). The lower edge of the specimen must be three-fourths inch above the top edge of the burner. The flame must be applied to the center line of the lower edge of the specimen. For materials covered by paragraphs 23.853(d)(3)(i) and 23.853(f), the flame must be applied for 60 seconds and then removed. For materials covered by paragraph 23.853(d)(3)(ii), the flame must be applied for 12 seconds and then removed. Flame time, burn length, and flaming time of drippings, if any, must be recorded. The burn length determined in accordance with paragraph (h) of this appendix must be measured to the nearest one-tenth inch (2 mm).

(e) Horizontal test. A minimum of three specimens must be tested and the results averaged. Each specimen must be supported horizontally. The exposed surface when installed in the airplane must be face down for the test. The specimen must be exposed to a Bunsen burner or Tirrill burner with a nominal 3/8-inch (9 mm) I.D. tube adjusted to give a flame of 1 1/2 inches (38 mm) in height. The minimum flame temperature measured by a calibrated thermocouple pyrometer in the center of the flame must be 1.550 °F (843 °C). The specimen must be positioned so that the edge being tested is three-fourths of an inch (19 mm) above the top of, and on the center line of, the burner. The flame must be applied for 15 seconds and then removed. A minimum of 10 inches (254 mm) of the specimen must be used for timing purposes, approximately 1 1/2 inches (38 mm) must burn before the burning front reaches the timing zone, and the average burn rate must be recorded.

(f) Forty-five degree test. A minimum of three specimens must be tested and the results averaged. The specimens must be supported at an angle of 45 degrees to a horizontal surface. The exposed surface when installed in the aircraft must be face down for the test. The

semelhantes.

(d) Ensaio Vertical. Um mínimo de três corpos de prova deve ser ensaiado e utilizado o resultado médio. Para tecidos, a direção da fibra correspondente às condições de flamabilidade mais críticas deve estar paralela à dimensão mais longa. Cada corpo de prova deve ser apoiado verticalmente. O corpo de prova deve ser exposto a um bico de Bunsen ou queimador Tirrill com um tubo de diâmetro interno nominal de 3/8 de polegada (9 mm) ajustado para dar uma chama de 1 1/2 polegadas (38 mm) de altura. A temperatura de chama mínima medida por um pirômetro termopar calibrado, no centro da chama deve ser de 1.550° F (843 °C). A borda inferior do corpo de prova deve estar a 3/4 de polegada (19 mm) acima da borda superior do queimador. A chama deve ser aplicada na linha de centro da borda inferior do corpo de prova. Para materiais cobertos pelos requisitos 23.853(d)(3)(i) e 23.853(f), a chama deve ser aplicada durante 60 segundos e então retirada. Para materiais cobertos pelos requisitos 23.853(d)(3)(ii), a chama deve ser aplicada durante 12 segundos e então retirada. Tempo de permanência da chama, comprimento de queima, e o tempo de permanência da chama nos respingos, se houver, devem ser registrados. O comprimento de queima determinado conforme o parágrafo (h) deste apêndice deve ser medido o mais próximo de 1/10 de polegada (2 mm).

(e) Ensaio horizontal. Um mínimo de três corpos de prova deve ser ensaiado e utilizado o resultado médio. Cada corpo de prova deve ser apoiado horizontalmente. A superfície exposta quando instalada no avião deve estar com a face para baixo para o ensaio. O corpo de prova deve ser exposto a um bico de Bunsen ou queimador Tirrill com um tubo de diâmetro interno nominal de 3/8 de polegada (9 mm) ajustado para dar uma chama de 1 1/2 polegadas (38 mm) de altura. A temperatura de chama mínima, medida por um pirômetro termopar calibrado no centro da chama deve ser de 1.550 °F (843 °C). O corpo de prova deve ser

specimens must be exposed to a Bunsen or Tirrill burner with a nominal 3/8 inch (9 mm) I.D. tube adjusted to give a flame of 1 ½ inches (38 mm) in height. The minimum flame temperature measured by a calibrated thermocouple pyrometer in the center of the flame must be 1550 °F (843 °C). Suitable precautions must be taken to avoid drafts. The flame must be applied for 30 seconds with one-third contacting the material at the center of the specimen and then removed. Flame time, glow time, and whether the flame penetrates (passes through) the specimen must be recorded.

(g) Sixty-degree test. A minimum of three specimens of each wire specification (make and size) must be tested. The specimen of wire or cable (including insulation) must be placed at an angle of 60 degrees with the horizontal in the cabinet specified in paragraph (c) of this appendix, with the cabinet door open during the test or placed within a chamber approximately 2 feet high × 1 foot × 1 foot, (610 x 305 x 305 mm) open at the top and at one vertical side (front), that allows sufficient flow of air for complete combustion but is free from drafts. The specimen must be parallel to and approximately 6 inches (152 mm) from the front of the chamber. The lower end of the specimen must be held rigidly clamped. The upper end of the specimen must pass over a pulley or rod and must have an appropriate weight attached to it so that the specimen is held tautly throughout the flammability test. The test specimen span between lower clamp and upper pulley or rod must be 24 inches (610 mm) and must be marked 8 inches (203 mm) from the lower end to indicate the central point for flame application. A flame from a Bunsen or Tirrill burner must be applied for 30 seconds at the test mark. The burner must be mounted underneath the test mark on the specimen, perpendicular to the specimen and at an angle of 30 degrees to the vertical plane of the specimen. The burner must have a nominal bore of three-eighths inch (9 mm), and must be adjusted to provide a three-inch-high (76 mm) flame with an inner cone approximately one-third of the flame height. The minimum

posicionado de tal forma que a borda a ser ensaiada fique a 3/4 de polegada (19 mm) acima do topo, e na linha de centro do queimador. A chama deve ser aplicada durante 15 segundos e então retirada. Um mínimo de 10 polegadas (254 mm) do corpo de prova deve ser usado com a finalidade de cronometragem, aproximadamente 1 ½ polegadas (38 mm) devem queimar-se antes que a frente de chama alcance a zona de cronometragem, e a taxa média de queima deve ser registrada.

(f) Ensaio a quarenta e cinco graus. Um mínimo de três corpos de prova deve ser ensaiado e utilizado o resultado médio. Os corpos de prova devem ser apoiados em um ângulo de 45 graus em relação a uma superfície horizontal. A superfície exposta quando instalada no avião deve estar com a face para baixo para o ensaio. O corpo de prova deve ser exposto a um bico de Bunsen ou queimador Tirrill com um tubo de diâmetro interno nominal de 3/8 de polegada (9 mm) ajustado para dar uma chama de 1 ½ polegadas (38 mm) de altura. A temperatura de chama mínima, medida por um pirômetro termopar calibrado no centro da chama deve ser de 1.550 ° F (843 °C). As precauções apropriadas devem ser tomadas para evitar uma corrente de ar. A chama deve ser aplicada durante 30 segundos com um terço da mesma em contato com o material no centro do corpo de prova, e então removida. O tempo de permanência da chama, o tempo de brasa, e se a chama penetra (passa) pelo corpo de prova deve ser registrado.

(g) Ensaio a sessenta graus. Um mínimo de três corpos de prova de cada especificação de fio (modelo e tamanho) deve ser ensaiado. O corpo de prova do fio ou cabo (inclusive o isolamento) deve ser colocado em um ângulo de 60 graus com a horizontal no gabinete especificado no parágrafo (c) deste apêndice, com a porta do gabinete aberta durante o ensaio ou colocado dentro de uma câmara de aproximadamente 2 pés de altura x 1 pé x 1 pé (610 x 305 x 305 mm), aberta em cima e em um lado vertical (frente), que permita o fluxo suficiente do ar para a combustão completa

temperature of the hottest portion of the flame, as measured with a calibrated thermocouple pyrometer, may not be less than 1.750 °F (954 °C). The burner must be positioned so that the hottest portion of the flame is applied to the test mark on the wire. Flame time, burn length, and flaming time drippings, if any, must be recorded. The burn length determined in accordance with paragraph (h) of this appendix must be measured to the nearest one-tenth inch (2 mm). Breaking of the wire specimen is not considered a failure.

(h) Burn length. Burn length is the distance from the original edge to the farthest evidence of damage to the test specimen due to flame impingement, including areas of partial or complete consumption, charring, or embrittlement, but not including areas sooted, stained, warped, or discolored, nor areas where material has shrunk or melted away from the heat source.

Part II -- Test Method To Determine the Flammability and Flame Propagation Characteristics of Thermal/Acoustic Insulation Materials

Use this test method to evaluate the flammability and flame propagation characteristics of thermal/acoustic insulation when exposed to both a radiant heat source and a flame.

(a) Definitions.

Flame propagation means the furthest distance of the propagation of visible flame towards the far end of the test specimen, measured from the midpoint of the ignition source flame. Measure this distance after initially applying the ignition source and before all flame on the test specimen is extinguished. The measurement is not a determination of burn length made after the test.

Radiant heat source means an electric or air propane panel.

mas livre da corrente de ar. O corpo de prova deve estar paralelo a e aproximadamente 6 polegadas (152 mm) da frente da câmara. A extremidade inferior do corpo de prova deve ser mantida rigidamente presa. A extremidade superior do corpo de prova deve passar por cima de uma polia ou roldana e deve ter um peso apropriado amarrado a ele para que o corpo de prova seja mantido esticado em todas as partes do ensaio de flamabilidade. O comprimento do corpo de prova entre a extremidade inferior presa e a extremidade superior na polia ou roldana deve ser de 24 polegadas (610 mm) e deve ser marcado a 8 polegadas (203 mm) a partir da extremidade inferior do corpo de prova para indicar o ponto central para a aplicação da chama. Uma chama de um bico de Bunsen ou queimador Tirrill deve ser aplicada durante 30 segundos na marca de ensaio. O queimador deve ser montado embaixo da marca de ensaio do corpo de prova, perpendicular ao corpo de prova e em um ângulo de 30 graus ao plano vertical do corpo de prova. O queimador deve ter um furo nominal de 3/8 de polegada (9 mm), e deve ser ajustado para fornecer uma chama de três polegadas (76 mm) de altura com um cone interno de aproximadamente um terço da altura de chama.

A temperatura mínima da porção mais quente da chama, medida por um pirômetro termopar calibrado, não pode ser menos do que 1.750°F (954 °C). O queimador deve ser posicionado de modo que a porção mais quente da chama seja aplicada na marca de ensaio no fio. O tempo de permanência da chama, comprimento de queima, e o tempo de permanência da chama dos respingos, se houver, devem ser registrados. O comprimento de queima determinado conforme o parágrafo (h) deste apêndice deve ser medido o mais próximo de 1/10 de polegada (2 mm). A ruptura do corpo de prova do fio não é considerada uma falha.

(h) Comprimento de queima. Comprimento de queima é a distância da borda original até a evidência mais distante de dano ao corpo de prova ensaiado devido a influência da chama,

Thermal/acoustic insulation means a material or system of materials used to provide thermal and/or acoustic protection. Examples include fiberglass or other batting material encapsulated by a film covering and foams.

Zero point means the point of application of the pilot burner to the test specimen.

(b) Test apparatus.

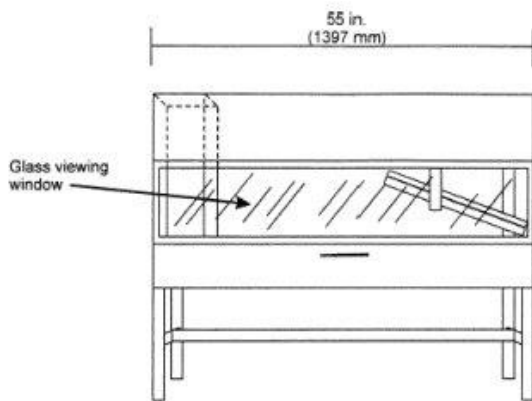


FIGURE F1—Radiant Panel Test Chamber

(1) Radiant panel test chamber. Conduct tests in a radiant panel test chamber (see figure F1 above). Place the test chamber under an exhaust hood to facilitate clearing the chamber of smoke after each test. The radiant panel test chamber must be an enclosure 55 inches (1.397 mm) long by 19.5 inches (495 mm) deep by 28 inches (710 mm) to 30 inches (maximum) (762 mm) above the test specimen. Insulate the sides, ends, and top with a fibrous ceramic insulation, such as Kaowool MTM board. On the front side, provide a 52 by 12-inch (1.321 by 305 mm) draft-free, high-temperature, glass window for viewing the sample during testing. Place a door below the window to provide access to the movable specimen platform holder. The bottom of the test chamber must be a sliding steel platform that has provision for securing the test specimen holder in a fixed and level position. The chamber must have an internal chimney with exterior dimensions of 5.1 inches (129 mm) wide, by 16.2 inches (411 mm) deep by 13 inches (330 mm) high at the opposite end of the chamber from the radiant

inclusive áreas de consumo parcial ou completo, carbonização, ou fragilização, mas não inclui áreas cobertas com fuligem, sujas, empenadas, ou descolorada, nem áreas onde o material se encolheu ou fundiu pela fonte de calor.

Parte II -- Método de ensaio para determinar a características de inflamabilidade e propagação de chama para materiais de isolamento térmico/acústico.

Utilize este método de ensaio para avaliar as características de inflamabilidade e propagação de chama do Isolamento Térmico/Acústico, quando expostos tanto a uma fonte de calor radiante quanto a uma chama.

(a) Definições.

"Propagação de Chama" significa a maior distância de propagação de chama visível em direção a extremidade do corpo de prova, medido a partir do ponto médio da fonte de ignição da chama. Medir esta distância depois de aplicar inicialmente a fonte de ignição e antes que toda a chama no corpo de prova seja extinta. A medição não é uma determinação do comprimento de queima feito depois do ensaio.

"Fonte de calor radiante" significa um painel elétrico ou painel de ar propano.

"O isolamento térmico/acústico" significa um material ou o sistema de materiais usados para fornecer proteção térmica e/ou acústica. Os exemplos incluem a fibra de vidro ou outro material de feltro encapsulado por uma película de cobertura e espumas.

"Ponto zero" significa o ponto de aplicação do queimador piloto no corpo de prova.

(b) Aparelho de ensaio.

energy source. The interior dimensions must be 4.5 inches (114 mm) wide by 15.6 inches (395 mm) deep. The chimney must extend to the top of the chamber (see figure F2).

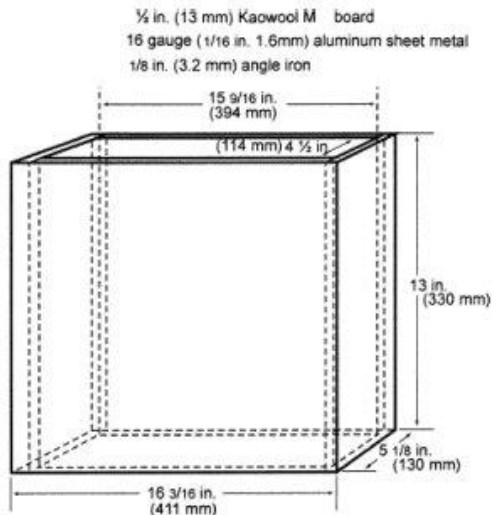


FIGURE F2—Internal Chimney

(2) Radiant heat source. Mount the radiant heat energy source in a cast iron frame or equivalent. An electric panel must have six, 3-inch wide emitter strips. The emitter strips must be perpendicular to the length of the panel. The panel must have a radiation surface of 12 7/8 by 18 1/2 inches (327 by 470 mm). The panel must be capable of operating at temperatures up to 1.300 °F (704 °C). An air propane panel must be made of a porous refractory material and have a radiation surface of 12 by 18 inches (305 by 457 mm). The panel must be capable of operating at temperatures up to 1.500 °F (816 °C). See figures F3a and F3b.

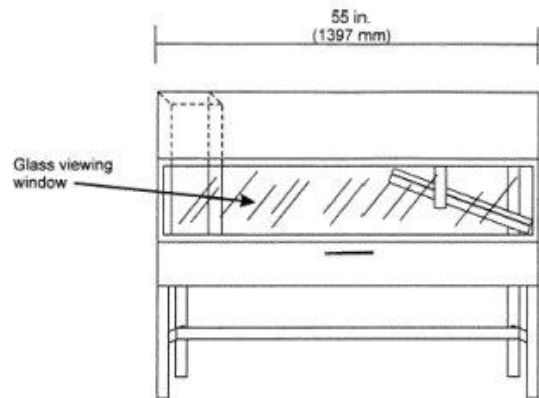


FIGURE F1—Radiant Panel Test Chamber

(1) Câmara de ensaio de painel radiante. Conduzir ensaios em uma câmara de ensaio de painel radiante (ver a figura F1 acima). Colocar a câmara de ensaio embaixo de uma cabine de exaustão para facilitar a limpeza da fumaça da câmara depois de cada ensaio. A câmara de ensaio de painel radiante deve ser um recinto cercado de 55 polegadas (1.397 mm) de comprimento por 19.5 polegadas (495 mm) de profundidade por 28 polegadas (710 mm) a 30 polegadas (máximo) 762 mm acima do corpo de prova. Isolar os lados, fundo, e topo com um isolamento cerâmico fibroso, como uma placa de Kaowool MTM. No lado da frente, fornece uma janela de vidro com 52 por 12 polegadas (1.321 por 305 mm) sem correntes de ar, para altas temperaturas, para visualização da amostra durante o ensaio. Colocar uma porta abaixo da janela para fornecer o acesso à plataforma móvel de suporte do corpo de prova. O fundo da câmara de ensaio deve ser uma plataforma deslizante de aço projetada para garantir que suporte do corpo de prova fique em uma posição fixa e nivelada.

A câmara deve ter uma chaminé interna com dimensões exteriores de 5.1 polegadas (129 mm) de largura, por 16.2 polegadas (411 mm) de profundidade por 13 polegadas (330 mm) de altura no fundo da câmara, oposto a fonte de energia radiante. As dimensões interiores devem ser de 4.5 polegadas (114 mm) de largura por 15.6 polegadas (395 mm) de profundidade. A chaminé deve estender-se ao

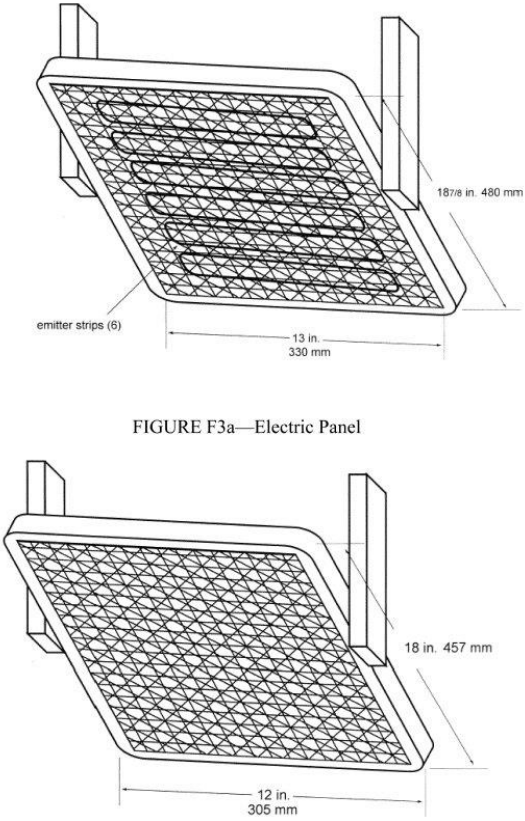


FIGURE F3a—Electric Panel

FIGURE F3b—Air Propane Radiant Panel

(i) Electric radiant panel. The radiant panel must be 3-phase and operate at 208 volts. A single-phase, 240 volt panel is also acceptable. Use a solid-state power controller and microprocessor-based controller to set the electric panel operating parameters.

(ii) Gas radiant panel. Use propane (liquid petroleum gas--2.1 UN 1075) for the radiant panel fuel. The panel fuel system must consist of a venturi-type aspirator for mixing gas and air at approximately atmospheric pressure. Provide suitable instrumentation for monitoring and controlling the flow of fuel and air to the panel. Include an air flow gauge, an air flow regulator, and a gas pressure gauge.

(iii) Radiant panel placement. Mount the panel in the chamber at 30 degrees to the horizontal specimen plane, and 7 1/2 inches above the zero point of the specimen.

(3) Specimen holding system.

topo da câmara (ver figura F2).

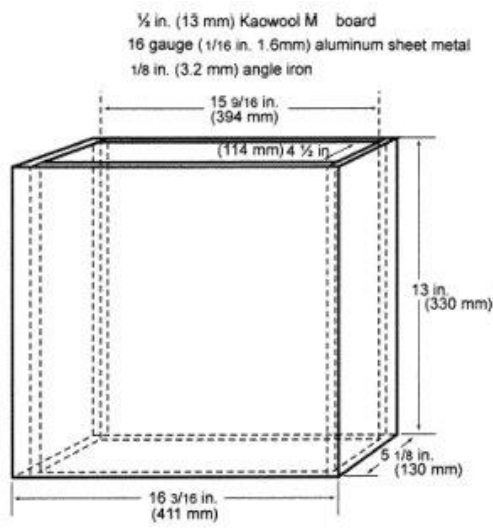


FIGURE F2—Internal Chimney

(2) Fonte de calor radiante. Monte a fonte de energia de calor radiante em uma armação de ferro fundido ou equivalente. Um painel elétrico deve ter seis, tiras emissoras de 3-polegadas de largura. As tiras emissoras devem estar perpendiculares ao comprimento do painel. O painel deve ter uma superfície de radiação de 12 7/8 por 18,5 polegadas (327 em 470 mm). O painel deve ser capaz de funcionar em temperaturas de até 1.300 °F (704 °C). Um painel de propano deve ser feito de um material refratário poroso e ter uma superfície de radiação de 12 por 18 polegadas (305 por 457 mm). O painel deve ser capaz de funcionar em temperaturas de até 1.500 °F (816 °C). Ver as figuras F3a e F3b.

(i) The sliding platform serves as the housing for test specimen placement. Brackets may be attached (via wing nuts) to the top lip of the platform in order to accommodate various thicknesses of test specimens. Place the test specimens on a sheet of Kaowool MTM board or 1260 Standard Board (manufactured by Thermal Ceramics and available in Europe), or equivalent, either resting on the bottom lip of the sliding platform or on the base of the brackets. It may be necessary to use multiple sheets of material based on the thickness of the test specimen (to meet the sample height requirement). Typically, these non-combustible sheets of material are available in 1/4-inch (6 mm) thicknesses. See figure F4. A sliding platform that is deeper than the 2-inch (50.8mm) platform shown in figure F4 is also acceptable as long as the sample height requirement is met.

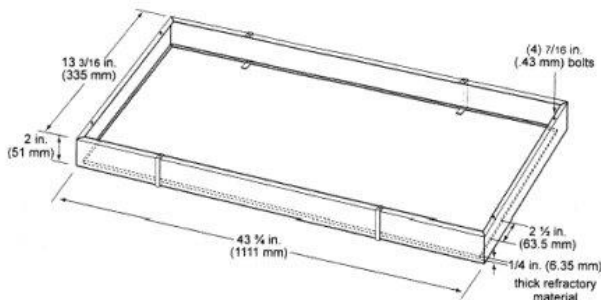


FIGURE F4—Sliding Platform

(ii) Attach a 1/2-inch (13 mm) piece of Kaowool MTM board or other high temperature material measuring 41 1/2 by 8 1/4 inches (1054 by 210 mm) to the back of the platform. This board serves as a heat retainer and protects the test specimen from excessive preheating. The height of this board may not impede the sliding platform movement (in and out of the test chamber). If the platform has been fabricated such that the back side of the platform is high enough to prevent excess preheating of the specimen when the sliding platform is out, a retainer board is not necessary.

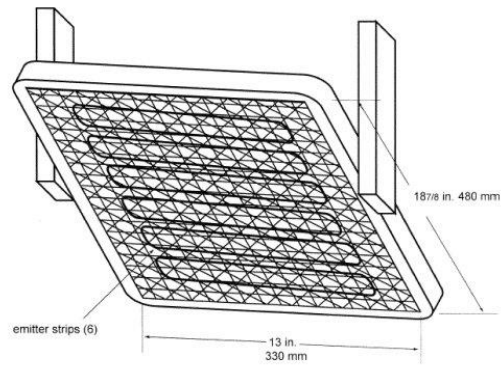


FIGURE F3a—Electric Panel

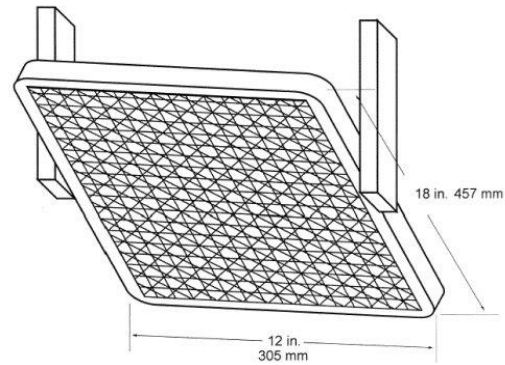


FIGURE F3b—Air Propane Radiant Panel

(i) Painel Radiante Elétrico. O painel radiante deve ser de 3-fases e operar em 208 volts. Um painel de única fase, 240 volts também é aceitável. Utilizar um controlador de força de estado sólido e microprocessador controlador para definir os parâmetros operacionais do painel elétrico.

(ii) Painel radiante a gás. Usar o propano (gás de petróleo líquido - a 2.1 UN 1075) como combustível do painel radiante. O sistema de combustível do painel deve compor-se de um aspirador do tipo Venturi para misturar o gás e o ar na pressão aproximadamente atmosférica. Fornecer a instrumentação adequada para monitorar e controlar o fluxo de combustível e de ar ao painel. Incluir um medidor de fluxo de ar, um regulador de fluxo de ar, e um medidor de pressão de gás.

(iii) Colocação do painel radiante. Montar o painel na câmara a 30 graus em relação ao plano horizontal do corpo de prova, e 7,5 polegadas (127 mm) acima do ponto zero do

(iii) Place the test specimen horizontally on the non-combustible board(s). Place a steel retaining/securing frame fabricated of mild steel, having a thickness of 1/8-inch (3.2 mm) and overall dimensions of 23 by 13 1/8 inches (584 by 333 mm) with a specimen opening of 19 by 10 3/4 inches (483 by 273 mm) over the test specimen. The front, back, and right portions of the top flange of the frame must rest on the top of the sliding platform, and the bottom flanges must pinch all 4 sides of the test specimen. The right bottom flange must be flush with the sliding platform. See figure F5.

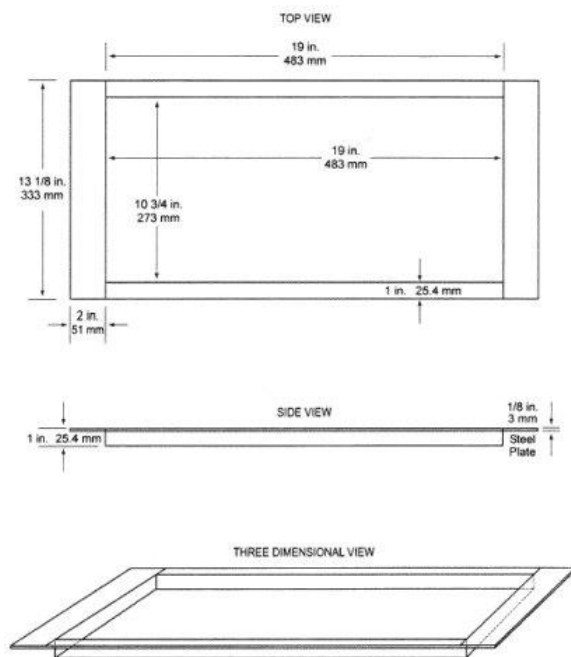


FIGURE F5: 3 Views

(4) Pilot Burner. The pilot burner used to ignite the specimen must be a Bernzomatic™ commercial propane venturi torch with an axially symmetric burner tip and a propane supply tube with an orifice diameter of 0.006 inches (0.15 mm). The length of the burner tube must be 2 7/8 inches (71 mm). The propane flow must be adjusted via gas pressure through an in-line regulator to produce a blue inner cone length of 3/4-inch (19 mm). A 3/4-inch (19 mm) guide (such as a thin strip of metal) may be soldered to the top of the burner to aid in setting the flame height. The overall flame length must be approximately 5 inches long (127 mm). Provide a way to move the

corpo de prova.

(3) Sistema de alojamento do corpo de prova.

(i) A plataforma deslizante serve como o alojamento para colocação do corpo de prova. Os suportes podem ser presos (através de porcas-borboletas) a aba superior da plataforma para acomodar várias espessuras de corpos de prova. Colocar os corpos de prova em uma folha de placa de Kaowool MTM ou placa 1260 Padrão (fabricados pela Thermal Ceramics e disponível na Europa), ou equivalente, que repousa na aba da superfície inferior da plataforma deslizante ou na base dos suportes. Pode ser necessário usar múltiplas folhas do material em função da espessura do corpo de prova (para encontrar a altura exigida da amostra). Normalmente, essas folhas não-combustíveis do material estão disponíveis na espessura de 1/4 polegada (6 mm). Ver figura F4. Uma plataforma deslizante que é mais profunda do que a plataforma de 2 polegadas (de 50.8 mm) mostrada na figura F4 é também aceitável desde que a altura exigida da amostra seja satisfeita.

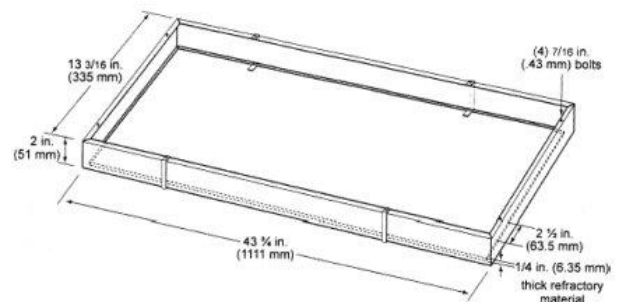


FIGURE F4—Sliding Platform

(ii) Prender um pedaço de placa de Kaowool MTM de 1/2 polegada (13 mm) ou outro material para alta temperatura medindo 41,5 por 8,25 polegadas (1054 por 210 mm) para às costas da plataforma. Esta placa funciona como um retentor de calor e protege o corpo de prova do pré-aquecimento excessivo. A altura desta placa não pode impedir o movimento da plataforma deslizante (dentro e fora da câmara

burner out of the ignition position so that the flame is horizontal and at least 2 inches (50 mm) above the specimen plane. See figure F6.

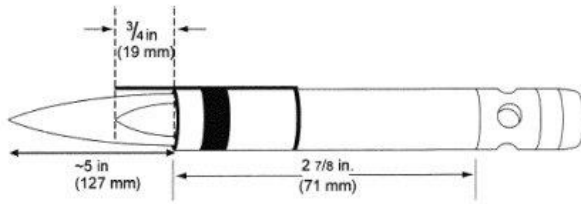


FIGURE F6—Propane Pilot Burner

(5) Thermocouples. Install a 24 American Wire Gauge (AWG) Type K (Chromel- Alumel) thermocouple in the test chamber for temperature monitoring. Insert it into the chamber through a small hole drilled through the back of the chamber. Place the thermocouple so that it extends 11 inches (279 mm) out from the back of the chamber wall, 11 1/2 inches (292 mm) from the right side of the chamber wall, and is 2 inches (51 mm) below the radiant panel. The use of other thermocouples is optional.

(6) Calorimeter. The calorimeter must be a one-inch cylindrical water-cooled, total heat flux density, foil type Gardon Gage that has a range of 0 to 5 BTU/ft 2-second (0 to 5,7 Watts/cm 2).

(7) Calorimeter calibration specification and procedure.

(i) Calorimeter specification.

(A) Foil diameter must be 0,25 +/- 0,005 inches (6,35 +/- 0,13 mm).

(B) Foil thickness must be 0,0005 +/- 0,0001 inches (0,013 +/- 0,0025 mm).

(C) Foil material must be thermocouple grade Constantan.

(D) Temperature measurement must be a Copper Constantan thermocouple.

(E) The copper center wire diameter must be

de ensaio). Se a plataforma tiver sido fabricada de tal modo que o lado traseiro da plataforma é alto o suficiente para prevenir o pré-aquecimento excessivo do corpo de prova quando a plataforma deslizante está fora, uma placa retentora não é necessária.

(iii) Colocar o corpo de prova horizontalmente na placa não-combustível. Colocar uma armação de aço de retenção/segurança, fabricada do aço doce, tendo uma espessura de 1/8 polegada (3,2 mm) e dimensões totais de 23 por 13 1/8 polegadas (584 por 333 mm) com uma abertura do corpo de prova de 19 por 10 3/4 polegadas (483 por 273 mm) acima do corpo de prova. A frente, atrás, e as partes direitas do flange superior da armação devem ficar no topo da plataforma deslizante, e os flanges de fundo devem apertar os 4 lados do corpo de prova. O flange direito da superfície inferior deve estar nivelado com a plataforma deslizante. Ver figura F5.

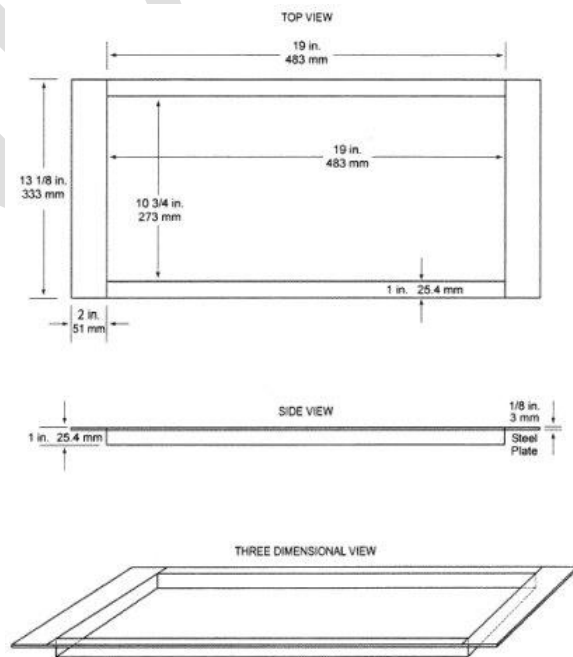


FIGURE F5: 3 Views

(4) Queimador Piloto. O queimador piloto usado para acender o corpo de prova deve ser uma tocha de tubo de Venturi de propano comercial Bernzomatic™ com uma ponta do queimador axial mente simétrica e um tubo de fornecimento de propano com um diâmetro de

0,0005 inches (0,013 mm).

(F) The entire face of the calorimeter must be lightly coated with "Black Velvet" paint having an emissivity of 96 or greater.

(ii) Calorimeter calibration.

(A) The calibration method must be by comparison to a like standardized transducer.

(B) The standardized transducer must meet the specifications given in paragraph II(b)(6) of this appendix.

(C) Calibrate the standard transducer against a primary standard traceable to the National Institute of Standards and Technology (NIST).

(D) The method of transfer must be a heated graphite plate.

(E) The graphite plate must be electrically heated, have a clear surface area on each side of the plate of at least 2 by 2 inches (51 by 51 mm), and be 1/8-inch +/- 1/16-inch thick (3,2 +/- 1,6 mm).

(F) Center the 2 transducers on opposite sides of the plates at equal distances from the plate.

(G) The distance of the calorimeter to the plate must be no less than 0,0625 inches (1,6 mm), and no greater than 0,375 inches (9,5 mm).

(H) The range used in calibration must be at least 0-3,5 BTUs/ft 2-second (0-3,9 Watts/cm 2) and no greater than 0-5,7 BTUs/ft 2-second (0-6,4 Watts/cm 2).

(I) The recording device used must record the 2 transducers simultaneously or at least within 1/10 of each other.

(8) Calorimeter fixture. With the sliding platform pulled out of the chamber, install the calorimeter holding frame and place a sheet of non-combustible material in the bottom of the sliding platform adjacent to the holding frame.

orifício de 0,006 polegadas (0.15 mm). O comprimento do tubo do queimador deve ser 2 7/8 polegadas (71 mm). O fluxo de propano deve ser ajustado via pressão do gás por meio de um regulador ligado em série para produzir um comprimento de cone azul interno de 3/4 polegada (19 mm). Um guia de 3/4 polegada (19 mm) (como uma tira fina de metal) pode ser soldado no topo do queimador para ajudar no ajuste da altura da chama. O comprimento de chama total deve ser de aproximadamente 5 polegadas de comprimento (127 mm). Fornece uma maneira de mover o queimador para fora da posição de ignição de modo que a chama esteja na horizontal e pelo menos 2 polegadas (50 mm) acima do plano do corpo de prova. Ver figura F6.

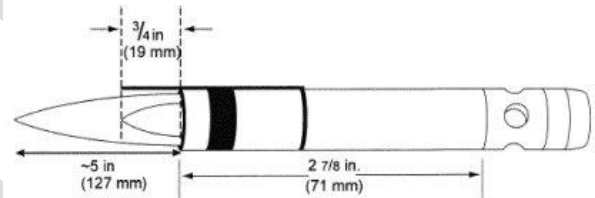


FIGURE F6—Propane Pilot Burner

(5) Termopares. Instalar um termopar 24 American Wire Gauge (AWG) Tipo K (Chromel-Alumel) na câmara de ensaio para monitoramento da temperatura. Inserir na câmara por um pequeno furo na parte traseira da câmara. Colocar o termopar de modo que ele se estenda 11 polegadas (279 mm) para fora da parede traseira da câmara, 11 1/2 polegadas (292 mm) do lado direito da parede de câmara, e esteja a 2 polegadas (51 mm) abaixo do painel radiante. O uso de outros termopares é opcional.

(6) Calorímetro. O calorímetro deve ser cilíndrico de uma polegada esfriado por água, de densidade total de fluxo de calor, folha metálica tipo Gardon Gage que tem uma faixa de indicação de 0 a 5 BTU/ft 2 -second (0 a 5,7 Watts/cm2).

(7) Especificação e Procedimento de calibração do Calorímetro.

This will prevent heat losses during calibration. The frame must be 13 1/8 inches (333 mm) deep (front to back) by 8 inches (203 mm) wide and must rest on the top of the sliding platform. It must be fabricated of 1/8-inch (3.2 mm) flat stock steel and have an opening that accommodates a 1/2-inch (12.7 mm) thick piece of refractory board, which is level with the top of the sliding platform. The board must have three 1-inch (25.4 mm) diameter holes drilled through the board for calorimeter insertion. The distance to the radiant panel surface from the centerline of the first hole ("zero" position) must be $7\frac{1}{2} \pm \frac{1}{8}$ inches (191 ± 3 mm). The distance between the centerline of the first hole to the centerline of the second hole must be 2 inches (51 mm). It must also be the same distance from the centerline of the second hole to the centerline of the third hole. See figure F7. A calorimeter holding frame that differs in construction is acceptable as long as the height from the centerline of the first hole to the radiant panel and the distance between holes is the same as described in this paragraph.

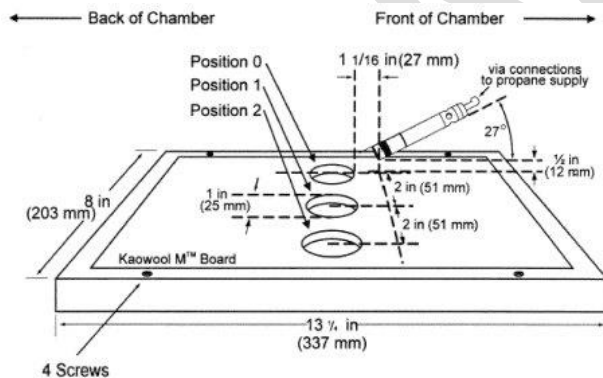


FIGURE F7—Calorimeter Holding Frame

(9) Instrumentation. Provide a calibrated recording device with an appropriate range or a computerized data acquisition system to measure and record the outputs of the calorimeter and the thermocouple. The data acquisition system must be capable of recording the calorimeter output every second during calibration.

(10) Timing device. Provide a stopwatch or

(i) Especificação do Calorímetro.

(A) O diâmetro da folha metálica deve ser de $0,25 \pm 0,005$ polegadas ($6,35 \pm 0,13$ mm).

(B) A espessura da folha metálica deve ser $0,0005 \pm 0,0001$ polegadas ($0,013 \pm 0,0025$ mm).

(C) O material da folha metálica deve ser de liga de Constantan da classe do termopar.

(D) A medição de temperatura deve ser um termopar de liga de cobre Constantan.

(E) O diâmetro do arame central de cobre deve ser de $0,0005$ polegadas ($0,013$ mm).

(F) Toda a face do calorímetro deve ser levemente revestida com uma tinta "Preta Aveludada" tendo uma emissividade de 96 ou maior.

(ii) Calibração do Calorímetro.

(A) O método de calibração deve ser feito por comparação a um transdutor similar padronizado.

(B) O transdutor padronizado deve satisfazer as especificações dadas no parágrafo II(b)(6) deste apêndice.

(C) Calibrar o transdutor padrão contra um padrão primário rastreável ao Instituto Nacional de Padrões e Tecnologia (NIST) ou outro Laboratório Nacional reconhecido pelo NIST.

(D) O método de transferência deve ser uma placa de grafite aquecida.

(E) A placa de grafite deve ser eletricamente aquecida, ter uma área superficial limpa em cada lado da placa de pelo menos 2 por 2 polegadas (51 por 51 mm), e ter espessura de $1/8 \pm 1/16$ polegada ($3,2 \pm 1,6$ mm).

(F) Centralizar os 2 transdutores em lados

other device, accurate to ± 1 second/hour, to measure the time of application of the pilot burner flame.

(c) Test specimens.

(1) Specimen preparation. Prepare and test a minimum of three test specimens. If an oriented film cover material is used, prepare and test both the warp and fill directions.

(2) Construction. Test specimens must include all materials used in construction of the insulation (including batting, film, scrim, tape, etc.). Cut a piece of core material such as foam or fiberglass, and cut a piece of film cover material (if used) large enough to cover the core material. Heat sealing is the preferred method of preparing fiberglass samples, since they can be made without compressing the fiberglass ("box sample"). Cover materials that are not heat sealable may be stapled, sewn, or taped as long as the cover material is sufficiently over-cut to be drawn down the sides without compressing the core material. The fastening means should be as continuous as possible along the length of the seams. The specimen thickness must be of the same thickness as installed in the airplane.

(3) Specimen Dimensions. To facilitate proper placement of specimens in the sliding platform housing, cut non-rigid core materials, such as fiberglass, 12 1/2 inches (318mm) wide by 23 inches (584mm) long. Cut rigid materials, such as foam, 11 1/2 \pm 1/4 inches (292 mm \pm 6mm) wide by 23 inches (584mm) long in order to fit properly in the sliding platform housing and provide a flat, exposed surface equal to the opening in the housing.

(d) Specimen conditioning. Condition the test specimens at 70 \pm 5 °F (21 \pm 2 °C) and 55 percent \pm 10 percent relative humidity, for a minimum of 24 hours prior to testing.

(e) Apparatus Calibration.

(1) With the sliding platform out of the

opostos da placa em iguais distâncias da placa.

(G) A distância do calorímetro à placa não pode ser menor que 0.0625 polegadas (1.6 mm), e não maior do que 0.375 polegadas (9.5 mm).

(H) A faixa de indicação usada na calibração deve ser pelo menos 0-3.5 BTUs/ ft² second (0-3,9 Watts/cm²) e não maior do que 0-5.7 BTUs/ ft² second (0-6,4 Watts/cm²).

(I) O dispositivo de registro usado deve registrar os 2 transdutores simultaneamente ou pelo menos dentro de 1/10 um do outro.

(8) Instalação do Calorímetro. Com a plataforma deslizante fora da câmara, instalar a armação que mantém o calorímetro e colocar uma folha do material não-combustível na superfície inferior da plataforma deslizante adjacente à armação. Isso irá evitar perdas de calor durante a calibração. A armação deve ser 13 1/8 polegadas (333 mm) de profundidade (da frente ao fundo) por 8 polegadas (203 mm) de largura e deve repousar no topo da plataforma deslizante. Deve ser fabricada de chapa plana de aço com 1/8 polegada (3,2 mm) e ter uma abertura que acomode uma parte de uma placa de refratário com 1/2 polegada (12.7 mm) de espessura, que está nivelada com o topo da plataforma deslizante. A placa deve ter três furos de 1 polegada (25.4 mm) de diâmetro para inserção do calorímetro. A distância da superfície do painel radiante até a linha central do primeiro furo (posição "zero") deve ser 7 1/2 \pm 1/8 polegadas (191 \pm 3 mm). A distância entre a linha central do primeiro furo até a linha central do segundo furo deve ser de 2 polegadas (51 mm). Esta também deve ser a mesma distância da linha central do segundo furo até a linha central do terceiro furo. Ver figura F7. Uma armação para manter o calorímetro que se diferencia na construção é aceitável desde que a altura da linha central do primeiro furo até o painel radiante e a distância entre os furos seja a mesma, tal como descrito neste parágrafo.

chamber, install the calorimeter holding frame. Push the platform back into the chamber and insert the calorimeter into the first hole ("zero" position). See figure F7. Close the bottom door located below the sliding platform. The distance from the centerline of the calorimeter to the radiant panel surface at this point must be 7 1/2 inches ± 1/8 (191 mm ± 3). Before igniting the radiant panel, ensure that the calorimeter face is clean and that there is water running through the calorimeter.

(2) Ignite the panel. Adjust the fuel/air mixture to achieve 1.5 BTUs/feet²-second ± 5 percent (1.7 Watts/cm² ± 5 percent) at the "zero" position. If using an electric panel, set the power controller to achieve the proper heat flux. Allow the unit to reach steady state (this may take up to 1 hour). The pilot burner must be off and in the down position during this time.

(3) After steady-state conditions have been reached, move the calorimeter 2 inches (51 mm) from the "zero" position (first hole) to position 1 and record the heat flux. Move the calorimeter to position 2 and record the heat flux. Allow enough time at each position for the calorimeter to stabilize. Table 1 depicts typical calibration values at the three positions.

Table 1--Calibration Table

Position	BTU/feet ² sec	Watts/cm ²
"Zero" Position	1,5	1,7
Position 1	1,51-1,50-1,49	1,71-1,70-1,69
Position 2	1,43-1,44	1,62-1,63

(4) Open the bottom door, remove the calorimeter and holder fixture. Use caution as the fixture is very hot.

(f) Test Procedure.

(1) Ignite the pilot burner. Ensure that it is at least 2 inches (51 mm) above the top of the platform. The burner may not contact the specimen until the test begins.

(2) Place the test specimen in the sliding

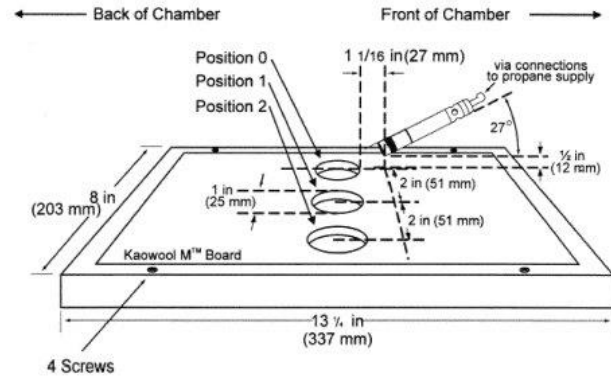


FIGURE F7—Calorimeter Holding Frame

(9) Instrumentação. Fornece um dispositivo de registro calibrado com faixa de indicação adequada ou um sistema de aquisição de dados computadorizado para medir e registrar as saídas de dados do calorímetro e do termopar. O sistema de aquisição de dados deve ser capaz de registrar as saídas de dados do calorímetro a cada segundo durante a calibração.

(10) Dispositivo de medição de tempo. Fornecer um cronômetro ou outro dispositivo, com erro máximo admissível de +/- 1 segundo/hora, para medir o tempo de aplicação da chama do queimador piloto.

(c) Corpos de Prova.

(1) Preparação do corpo de prova. Preparar e ensaiar um mínimo de três corpos de prova. Se um material coberto com uma película orientada é usado, preparar e ensaiar em ambas as direções da trama.

(2) Construção. Os corpos de prova devem incluir todos os materiais usados na construção do isolamento (inclusive feltro, filme, tecido de algodão, fita etc.). Cortar uma parte do material principal como espuma ou fibra de vidro, e cortar um pedaço do filme que cobre o material (se usado) grande o suficiente para cobrir o material principal. Selagem a quente é o método preferencial de preparação de amostras de fibra de vidro, uma vez que eles podem ser feitos sem comprimir a fibra de vidro ("caixa amostra"). Os materiais de cobertura que não são selados a quente podem ser grampeados,

platform holder. Ensure that the test sample surface is level with the top of the platform. At "zero" point, the specimen surface must be 7 1/2 inches \pm 1/8 inch (191 mm \pm 3) below the radiant panel.

(3) Place the retaining/securing frame over the test specimen. It may be necessary (due to compression) to adjust the sample (up or down) in order to maintain the distance from the sample to the radiant panel (7 1/2 inches \pm 1/8 inch (191 mm \pm 3) at "zero" position). With film/fiberglass assemblies, it is critical to make a slit in the film cover to purge any air inside. This allows the operator to maintain the proper test specimen position (level with the top of the platform) and to allow ventilation of gases during testing. A longitudinal slit, approximately 2 inches (51mm) in length, must be centered 3 inches \pm 1/2 inch (76mm \pm 13mm) from the left flange of the securing frame. A utility knife is acceptable for slitting the film cover.

(4) Immediately push the sliding platform into the chamber and close the bottom door.

(5) Bring the pilot burner flame into contact with the center of the specimen at the "zero" point and simultaneously start the timer. The pilot burner must be at a 27 degree angle with the sample and be approximately 1/2 inch (12 mm) above the sample. See figure F7. A stop, as shown in figure F8, allows the operator to position the burner correctly each time.

costurados, ou fixados com fita enquanto que o material de cobertura é cortado suficientemente para ser puxado para abaixo nos lados sem comprimir o material principal. Os meios de fixação devem ser tão contínuos quanto possível ao longo das costuras. A espessura do corpo de prova deve ser da mesma espessura do material que é instalado no avião.

(3) Dimensões do corpo de prova. Para facilitar o correto posicionamento do corpo de prova no alojamento da plataforma deslizante, cortar os materiais principais não-rígidos, como fibra de vidro, 12 1/2 polegadas (318 mm) de largura por 23 polegadas (584 mm) de comprimento. Cortar os materiais rígidos, como espuma, 11 1/2 +/-1/4 polegadas (292 +/- 6 mm) de largura por 23 polegadas (584 mm) de comprimento para ajustar-se adequadamente no alojamento da plataforma deslizante e fornecer uma superfície exposta plana igual à abertura no alojamento.

(d) Condicionamento do corpo de prova. Os corpos de prova devem ser condicionados a 70 +/- 5 °F (21 +/- 2 °C) e 55 por cento +/- 10 por cento de umidade relativa, por no mínimo 24 horas antes do ensaio.

(e) Calibração do Aparelho.

(1) Com a plataforma deslizante fora da câmara, instalar a armação que mantém o calorímetro. Empurrar a plataforma de volta para a câmara e inserir o calorímetro no primeiro furo (posição "zero"). Ver figura F7. Fechar a porta inferior localizada abaixo da plataforma deslizante. A distância da linha central do calorímetro até a superfície do painel radiante neste ponto deve ser de 7 1/2 +/- 1/8 polegadas (191 +/-3 mm). Antes de acender o painel radiante, assegurar que a face do calorímetro esteja limpa e que haja água correndo através do calorímetro.

(2) Acender o painel. Ajustar a mistura de combustível/ar para alcançar 1.5 BTUs/ft² – segundo +/- 5 por cento (1,7 Watts/cm +/- 5 por cento) na posição "zero". Se estiver

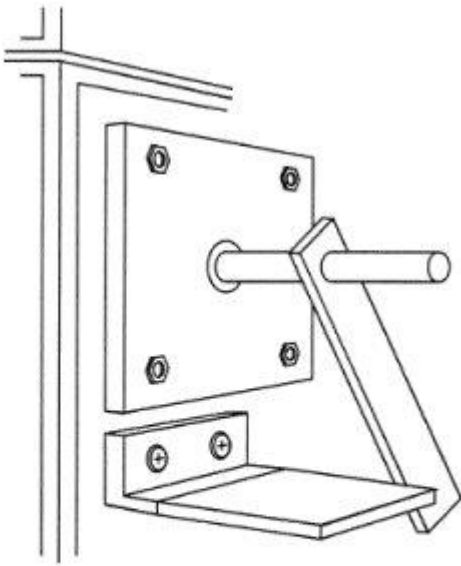


FIGURE F8—Propane Burner Stop

(6) Leave the burner in position for 15 seconds and then remove to a position at least 2 inches (51 mm) above the specimen.

(g) Report.

(1) Identify and describe the test specimen.

(2) Report any shrinkage or melting of the test specimen.

(3) Report the flame propagation distance. If this distance is less than 2 inches, report this as a pass (no measurement required).

(4) Report the after-flame time.

(h) Requirements.

(1) There must be no flame propagation beyond 2 inches (51 mm) to the left of the centerline of the pilot flame application.

(2) The flame time after removal of the pilot burner may not exceed 3 seconds on any specimen.

utilizando um painel elétrico, ajustar o controlador de energia para alcançar o fluxo de calor adequado. Permitir que a unidade atinja a condição estável (isto pode demorar até 1 hora). O queimador piloto deve estar desligado e em posição baixa durante este tempo.

(3) Depois que as condições estáveis forem atingidas, mover o calorímetro 2 polegadas (51 mm) da posição "zero" (primeiro furo) para a posição 1 e registrar o fluxo de calor. Mover o calorímetro para a posição 2 e registrar o fluxo de calor. Permitir um tempo suficiente em cada posição para que o calorímetro se estabilize. A Tabela 1 apresenta valores de calibração típicos nas três posições.

Tabela 1—Tabela de calibração

Posição	BTU/feet 2 sec	Watts/cm2
Posição "zero"	1,5	1,7
Posição 1	1,51–1,50–1,49	1,71–1,70–1,69
Posição 2	1,43–1,44	1,62–1,63

(4) Abrir a porta inferior, remover o calorímetro e o suporte de fixação. Tomar cuidado, pois o suporte está muito quente.

(f) Procedimento de ensaio.

(1) Acender o queimador piloto. Assegurar que ele está pelo menos 2 polegadas (51 mm) acima do topo da plataforma. O queimador não pode entrar em contato com o corpo de prova até que o ensaio comece.

(2) Colocar o corpo de prova no suporte da plataforma deslizante. Assegurar que a superfície da amostra do ensaio está nivelada com o topo da plataforma. No ponto "zero", a superfície do corpo de prova deve estar 7 1/2 polegadas +/- 1/8 polegada (191 +/- 3 mm) abaixo do painel radiante.

(3) Colocar o suporte de manutenção/proteção acima do corpo de prova. Pode ser necessário (devido à compressão) ajustar a amostra (para cima ou para baixo) para manter a distância da amostra ao painel radiante (7 1/2 polegadas +/- 1/8 polegada (191 +/- 3 mm) na posição "zero").

	<p>Na montagem do filme/fibra de vidro, é fundamental fazer uma fenda na cobertura do filme para purgar qualquer ar no interior. Isto permite que o operador mantenha a posição adequada do corpo de prova (nivelada com o topo da plataforma) e permita a ventilação dos gases durante o ensaio. Uma fenda longitudinal, de aproximadamente 2 polegadas (51 mm) no comprimento, deve ser centrada 3 polegadas +/- 1/2 polegada (76 mm +/- 13 mm) a partir do flange esquerda da armação de segurança. Uma faca de serviço é aceitável para cortar a cobertura do filme.</p> <p>(4) Imediatamente empurrar a plataforma deslizante para a câmara e fechar a porta inferior.</p> <p>(5) Trazer a chama piloto do queimador em contato com o centro do corpo de prova no ponto "zero" e simultaneamente iniciar o cronômetro. O queimador piloto deve estar em um ângulo de 27° com a amostra e estar aproximadamente 1/2 polegadas (12 mm) acima da amostra. Ver figura F7. Um batente, como mostrado na figura F8, permite que o operador posicione o queimador corretamente a cada vez.</p>
--	--

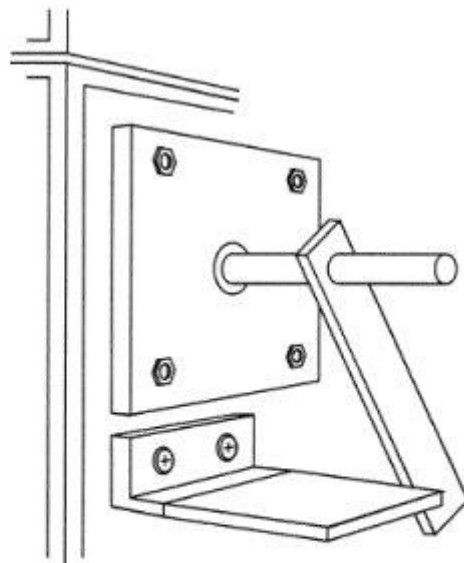


FIGURE F8—Propane Burner Stop

(6) Deixar o queimador na posição por 15 segundos e, em seguida, remover a uma posição pelo menos 2 polegadas (51 mm) acima do corpo de prova.

(g) Relatório.

(1) Identificar e descrever o corpo de prova.

(2) Relatar qualquer encolhimento ou fusão do corpo de prova.

(3) Relatar a distância de propagação de chama. Se esta distância for menor que 2 polegadas, relatar isto como sendo uma aprovação (nenhuma medição é necessária).

(4) Relatar o tempo de pós-chama.

(h) Requisitos.

(1) Não pode haver nenhuma propagação de chama além de 2 polegadas (51 mm) para a esquerda da linha central de aplicação da chama piloto.

(2) O tempo de chama depois da retirada do

	queimador piloto não pode exceder 3 segundos em nenhum corpo de prova.
--	--

[Amdt. 23-23, 43 FR 50594, Oct. 30, 1978, as amended by Amdt. 23-34, 52 FR 1835, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23-49, 61 FR 5170, Feb. 9, 1996; Amdt. 23-62, 76 FR 75763, Dec. 2, 2011]

Appendix G to Part 23—Instructions for Continued Airworthiness

G23.1 General. (a) This appendix specifies requirements for the preparation of Instructions for Continued Airworthiness as required by §23.1529.

(b) The Instructions for Continued Airworthiness for each airplane must include the Instructions for Continued Airworthiness for each engine and propeller (hereinafter designated ‘products’), for each appliance required by this chapter, and any required information relating to the interface of those appliances and products with the airplane. If Instructions for Continued Airworthiness are not supplied by the manufacturer of an appliance or product installed in the airplane, the Instructions for Continued Airworthiness for the airplane must include the information essential to the continued airworthiness of the airplane.

(c) The applicant must submit to the FAA a program to show how changes to the Instructions for Continued Airworthiness made by the applicant or by the manufacturers of products and appliances installed in the airplane will be distributed.

G23.2 Format. (a) The Instructions for Continued Airworthiness must be in the form of a manual or manuals as appropriate for the quantity of data to be provided.

(b) The format of the manual or manuals must provide for a practical arrangement.

G23.3 Content. The contents of the manual or manuals must be prepared in the English language. The Instructions for Continued Airworthiness must contain the following manuals or sections, as appropriate, and information:

(a) Airplane maintenance manual or section. (1) Introduction information that includes an explanation of the airplane's features and data to the extent necessary for maintenance or preventive maintenance.

(2) A description of the airplane and its systems and installations including its engines, propellers, and appliances.

(3) Basic control and operation information describing how the airplane components and systems are controlled and how they operate, including any special procedures and limitations that apply.

(4) Servicing information that covers details regarding servicing points, capacities of tanks, reservoirs, types of fluids to be used, pressures applicable to the various systems, location of access panels for inspection and servicing, locations of lubrication points, lubricants to be used, equipment required for servicing, tow instructions and limitations, mooring, jacking, and leveling information.

(b) Maintenance instructions. (1) Scheduling information for each part of the airplane and its

engines, auxiliary power units, propellers, accessories, instruments, and equipment that provides the recommended periods at which they should be cleaned, inspected, adjusted, tested, and lubricated, and the degree of inspection, the applicable wear tolerances, and work recommended at these periods. However, the applicant may refer to an accessory, instrument, or equipment manufacturer as the source of this information if the applicant shows that the item has an exceptionally high degree of complexity requiring specialized maintenance techniques, test equipment, or expertise. The recommended overhaul periods and necessary cross reference to the Airworthiness Limitations section of the manual must also be included. In addition, the applicant must include an inspection program that includes the frequency and extent of the inspections necessary to provide for the continued airworthiness of the airplane.

- (2) Troubleshooting information describing probable malfunctions, how to recognize those malfunctions, and the remedial action for those malfunctions.
 - (3) Information describing the order and method of removing and replacing products and parts with any necessary precautions to be taken.
 - (4) Other general procedural instructions including procedures for system testing during ground running, symmetry checks, weighing and determining the center of gravity, lifting and shoring, and storage limitations.
- (c) Diagrams of structural access plates and information needed to gain access for inspections when access plates are not provided.
 - (d) Details for the application of special inspection techniques including radiographic and ultrasonic testing where such processes are specified.
 - (e) Information needed to apply protective treatments to the structure after inspection.
 - (f) All data relative to structural fasteners such as identification, discard recommendations, and torque values.
 - (g) A list of special tools needed.
 - (h) In addition, for commuter category airplanes, the following information must be furnished:
 - (1) Electrical loads applicable to the various systems;
 - (2) Methods of balancing control surfaces;
 - (3) Identification of primary and secondary structures; and
 - (4) Special repair methods applicable to the airplane.

G23.4 Airworthiness Limitations section. The Instructions for Continued Airworthiness must contain a section titled Airworthiness Limitations that is segregated and clearly distinguishable from the rest of the document. This section must set forth each mandatory replacement time, structural inspection interval, and related structural inspection procedure required for type certification. If the Instructions for Continued Airworthiness consist of multiple documents, the

section required by this paragraph must be included in the principal manual. This section must contain a legible statement in a prominent location that reads: “The Airworthiness Limitations section is FAA approved and specifies maintenance required under §§43.16 and 91.403 of the Federal Aviation Regulations unless an alternative program has been FAA approved.”

[Amdt. 23–26, 45 FR 60171, Sept. 11, 1980, as amended by Amdt. 23–34, 52 FR 1835, Jan. 15, 1987; 52 FR 34745, Sept. 14, 1987; Amdt. 23–37, 54 FR 34329, Aug. 18, 1989]

Appendix H to Part 23—Installation of An Automatic Power Reserve (APR) System

H23.1, General.

(a) This appendix specifies requirements for installation of an APR engine power control system that automatically advances power or thrust on the operating engine(s) in the event any engine fails during takeoff.

(b) With the APR system and associated systems functioning normally, all applicable requirements (except as provided in this appendix) must be met without requiring any action by the crew to increase power or thrust.


H23.2, Definitions.

(a) Automatic power reserve system means the entire automatic system used only during takeoff, including all devices both mechanical and electrical that sense engine failure, transmit signals, actuate fuel controls or power levers on operating engines, including power sources, to achieve the scheduled power increase and furnish cockpit information on system operation.

(b) Selected takeoff power, notwithstanding the definition of “Takeoff Power” in part 1 of the Federal Aviation Regulations, means the power obtained from each initial power setting approved for takeoff.

(c) Critical Time Interval, as illustrated in figure H1, means that period starting at V₁ minus one second and ending at the intersection of the engine and APR failure flight path line with the minimum performance all engine flight path line. The engine and APR failure flight path line intersects the one-engine-inoperative flight path line at 400 feet above the takeoff surface. The engine and APR failure flight path is based on the airplane's performance and must have a positive gradient of at least 0.5 percent at 400 feet above the takeoff surface.

FIGURE H1 - CRITICAL TIME INTERVAL ILLUSTRATION



H23.3, Reliability and performance requirements.

- (a) It must be shown that, during the critical time interval, an APR failure that increases or does not affect power on either engine will not create a hazard to the airplane, or it must be shown that such failures are improbable.
- (b) It must be shown that, during the critical time interval, there are no failure modes of the APR system that would result in a failure that will decrease the power on either engine or it must be shown that such failures are extremely improbable.
- (c) It must be shown that, during the critical time interval, there will be no failure of the APR system in combination with an engine failure or it must be shown that such failures are extremely improbable.
- (d) All applicable performance requirements must be met with an engine failure occurring at the most critical point during takeoff with the APR system functioning normally.

H23.4, Power setting.

The selected takeoff power set on each engine at the beginning of the takeoff roll may not be less than—

- (a) The power necessary to attain, at V_1 , 90 percent of the maximum takeoff power approved for the airplane for the existing conditions;
- (b) That required to permit normal operation of all safety-related systems and equipment that are dependent upon engine power or power lever position; and
- (c) That shown to be free of hazardous engine response characteristics when power is advanced from the selected takeoff power level to the maximum approved takeoff power.

H23.5, Powerplant controls—general.

- (a) In addition to the requirements of §23.1141, no single failure or malfunction (or probable combination thereof) of the APR, including associated systems, may cause the failure of any powerplant function necessary for safety.
- (b) The APR must be designed to—
 - (1) Provide a means to verify to the flight crew before takeoff that the APR is in an operating condition to perform its intended function;
 - (2) Automatically advance power on the operating engines following an engine failure during takeoff to achieve the maximum attainable takeoff power without exceeding engine operating limits;
 - (3) Prevent deactivation of the APR by manual adjustment of the power levers following an engine failure;

- (4) Provide a means for the flight crew to deactivate the automatic function. This means must be designed to prevent inadvertent deactivation; and
- (5) Allow normal manual decrease or increase in power up to the maximum takeoff power approved for the airplane under the existing conditions through the use of power levers, as stated in §23.1141(c), except as provided under paragraph (c) of H23.5 of this appendix.
- (c) For airplanes equipped with limiters that automatically prevent engine operating limits from being exceeded, other means may be used to increase the maximum level of power controlled by the power levers in the event of an APR failure. The means must be located on or forward of the power levers, must be easily identified and operated under all operating conditions by a single action of any pilot with the hand that is normally used to actuate the power levers, and must meet the requirements of §23.777 (a), (b), and (c).

H23.6, Powerplant instruments.

In addition to the requirements of §23.1305:

- (a) A means must be provided to indicate when the APR is in the armed or ready condition.
- (b) If the inherent flight characteristics of the airplane do not provide warning that an engine has failed, a warning system independent of the APR must be provided to give the pilot a clear warning of any engine failure during takeoff.
- (c) Following an engine failure at V_1 or above, there must be means for the crew to readily and quickly verify that the APR has operated satisfactorily.

[Doc. 26344, 58 FR 18979, Apr. 9, 1993]

Appendix I to Part 23—Seaplane Loads


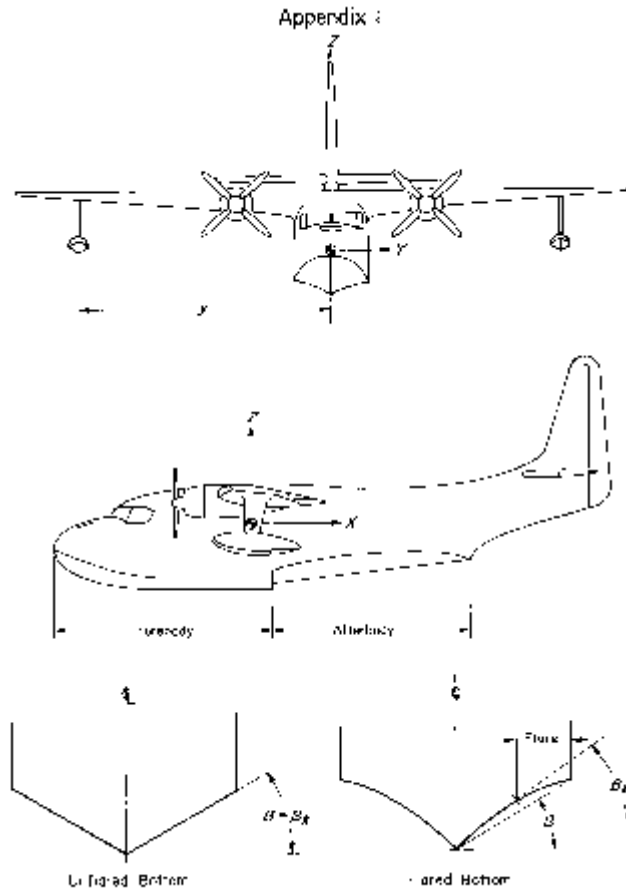


FIGURE 1. Definition of sweepback angle and dihedral angle.

Appendix I (continued)

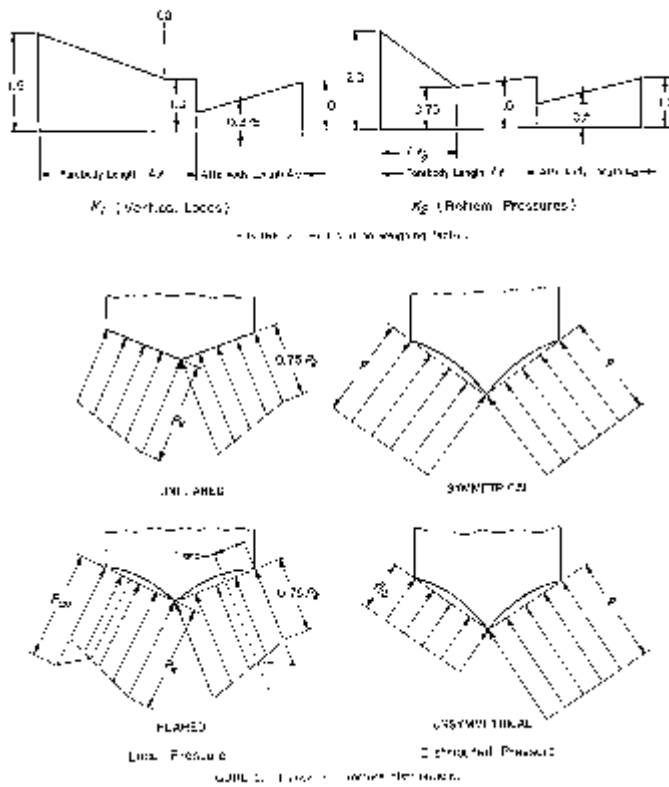

[Amdt. 23–45, 58 FR 42167, Aug. 6, 1993; 58 FR 51970, Oct. 5, 1993]

Appendix J to Part 23—HIRF Environments and Equipment HIRF Test Levels

This appendix specifies the HIRF environments and equipment HIRF test levels for electrical and electronic systems under §23.1308. The field strength values for the HIRF environments and equipment HIRF test levels are expressed in root-mean-square units measured during the peak of the modulation cycle.

(a) HIRF environment I is specified in the following table:

Table I.—HIRF Environment I

Frequency	Field strength (volts/meter)	
	Peak	Average
10 kHz–2 MHz	50	50
2 MHz–30 MHz	100	100
30 MHz–100 MHz	50	50
100 MHz–400 MHz	100	100
400 MHz–700 MHz	700	50
700 MHz–1 GHz	700	100

GHz–2 GHz	2,000	200
2 GHz–6 GHz	3,000	200
6 GHz–8 GHz	1,000	200
8 GHz–12 GHz	3,000	300
12 GHz–18 GHz	2,000	200
18 GHz–40 GHz	600	200

In this table, the higher field strength applies at the frequency band edges.

(b) HIRF environment II is specified in the following table:

Table II.–HIRF Environment II

Frequency	Field strength (volts/meter)	
	Peak	Average
10 kHz–500 kHz	20	20
500 kHz–2 MHz	30	30
2 MHz–30 MHz	100	100
30 MHz–100 MHz	10	10
100 MHz–200 MHz	30	10
200 MHz–400 MHz	10	10
400 MHz–1 GHz	700	40
1 GHz–2 GHz	1,300	160
2 GHz–4 GHz	3,000	120
4 GHz–6 GHz	3,000	160
6 GHz–8 GHz	400	170
8 GHz–12 GHz	1,230	230
12 GHz–18 GHz	730	190
18 GHz–40 GHz	600	150

In this table, the higher field strength applies at the frequency band edges.

(c) Equipment HIRF Test Level 1.

(1) From 10 kilohertz (kHz) to 400 megahertz (MHz), use conducted susceptibility tests with

continuous wave (CW) and 1 kHz square wave modulation with 90 percent depth or greater. The conducted susceptibility current must start at a minimum of 0.6 milliamperes (mA) at 10 kHz, increasing 20 decibels (dB) per frequency decade to a minimum of 30 mA at 500 kHz.

(2) From 500 kHz to 40 MHz, the conducted susceptibility current must be at least 30 mA.

(3) From 40 MHz to 400 MHz, use conducted susceptibility tests, starting at a minimum of 30 mA at 40 MHz, decreasing 20 dB per frequency decade to a minimum of 3 mA at 400 MHz.

(4) From 100 MHz to 400 MHz, use radiated susceptibility tests at a minimum of 20 volts per meter (V/m) peak with CW and 1 kHz square wave modulation with 90 percent depth or greater.

(5) From 400 MHz to 8 gigahertz (GHz), use radiated susceptibility tests at a minimum of 150 V/m peak with pulse modulation of 4 percent duty cycle with a 1 kHz pulse repetition frequency. This signal must be switched on and off at a rate of 1 Hz with a duty cycle of 50 percent.

(d) Equipment HIRF Test Level 2. Equipment HIRF test level 2 is HIRF environment II in table II of this appendix reduced by acceptable aircraft transfer function and attenuation curves. Testing must cover the frequency band of 10 kHz to 8 GHz.

(e) Equipment HIRF Test Level 3.

(1) From 10 kHz to 400 MHz, use conducted susceptibility tests, starting at a minimum of 0.15 mA at 10 kHz, increasing 20 dB per frequency decade to a minimum of 7.5 mA at 500 kHz.

(2) From 500 kHz to 40 MHz, use conducted susceptibility tests at a minimum of 7.5 mA.

(3) From 40 MHz to 400 MHz, use conducted susceptibility tests, starting at a minimum of 7.5 mA at 40 MHz, decreasing 20 dB per frequency decade to a minimum of 0.75 mA at 400 MHz.

(4) From 100 MHz to 8 GHz, use radiated susceptibility tests at a minimum of 5 V/m.

[Doc. No. FAA-2006-23657, 72 FR 44025, Aug. 6, 2007]